

Back Bar Refrigerators

BLACK BACK BAR REFRIGERATORS WITH SOLID OR GLASS SWING DOORS
BLACK BACK BAR REFRIGERATORS WITH GLASS SLIDING DOORS



BUILT TO PERFORM, DESIGNED TO DELIVER

As bar layouts continue to shrink, efficient refrigeration airflow has become essential for maintaining performance in tight commercial environments. The Asber Bar Refrigerators are designed with a fully front-breathing system, allowing seamless integration into compact bar layouts without sacrificing cooling power or reliability. The side-mounted refrigeration system provides unobstructed access to all interior storage areas, eliminating the interference of a roof-mounted evaporator. This thoughtful design ensures reliable, worry-free operation in fast-paced commercial environments.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy-savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Fully front-breathing, side-mounted refrigeration system maximizes airflow and enables flush installation in tight spaces, against walls or under counters.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Temperature range: Maintains 32°F to 38°F in ambient conditions up to 100°F and 65% RH.

LIGHTING & DISPLAY FEATURES

Clear, Attractive, and Energy-Efficient

- Energy-efficient, shadow-free LED interior lighting, for product visibility.
- "G" Models: Argon-insulated double-pane glass doors for improved efficiency and condensation-free visibility.
- "SD" Models features sliding glass doors for space-saving operation and easy access in tight retail environments.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Chip-resistant black vinyl exterior: Provides superior scratch and wear resistance versus painted surfaces, for a sleek look in busy retail areas.
- Full stainless-steel interior ensure strength, hygiene, and ease of maintenance.
- Doors lock with a universal key for product security during off-hours (except "SD" models).

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Adjustable bottle rails provide flexible product organization for bottles, cans, or mixers.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- Adjustable legs.
- Low-profile 3" casters.
- Stainless-steel exterior finish.



ABBC 24 48G SD



ABBC 24 60

MODEL	DOORS	SHELVES	CAPACITY		VOLTS - FREQUENCY	POWER HP	AMP	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft³	Bottles 12 oz.				Width	Depth	Height	Lbs	ft³
BLACK BACK BAR REFRIGERATORS WITH SOLID DOORS												
ABBC 24 48	2	4	11.3	300	115V. - 50/60Hz.	1/3	3.0	49-3/4	24-7/8	34-3/8	249	35.3
ABBC 24 60	2	4	15.3	390	115V. - 50/60Hz.	1/3	3.0	62-1/4	24-7/8	34-3/8	287	42.4
ABBC 24 72	3	6	18.3	540	115V. - 50/60Hz.	1/3	3.0	72-1/4	24-7/8	34-3/8	322	49.4
BLACK BACK BAR REFRIGERATORS WITH GLASS DOORS												
ABBC 24 48G	2	4	11.3	300	115V. - 50/60Hz.	1/3	3.0	49-3/4	24-7/8	34-3/8	249	35.3
ABBC 24 60G	2	4	15.3	390	115V. - 50/60Hz.	1/3	3.0	62-1/4	24-7/8	34-3/8	287	42.4
ABBC 24 72G	3	6	18.3	540	115V. - 50/60Hz.	1/3	3.0	72-1/4	24-7/8	34-3/8	322	49.4
BLACK BACK BAR REFRIGERATORS WITH GLASS SLIDING DOORS												
ABBC 24 48G SD	2	4	11.3	300	115V. - 50/60Hz.	1/3	3.0	49-3/4	24-7/8	34-3/8	249	35.3
ABBC 24 60G SD	2	4	15.3	390	115V. - 50/60Hz.	1/3	3.0	62-1/4	24-7/8	34-3/8	287	42.4
ABBC 24 72G SD	3	6	18.3	540	115V. - 50/60Hz.	1/3	3.0	72-1/4	24-7/8	34-3/8	322	49.4


SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | VALID FOR CONTINENTAL USA & CANADA. | APR, 2026

Back Bar Refrigerators


BLACK BACK BAR REFRIGERATORS WITH SOLID OR GLASS SWING DOORS
BLACK BACK BAR REFRIGERATORS WITH GLASS SLIDING DOORS





ABBC 24 48

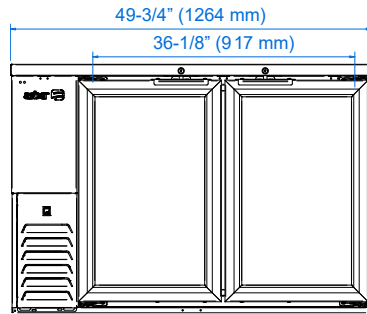

ABBC 24 60

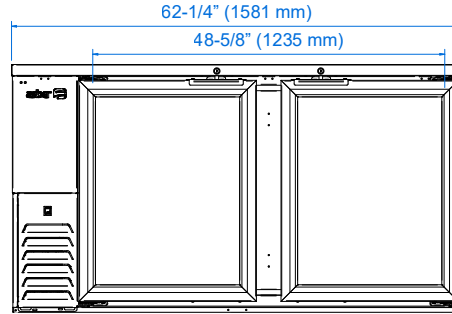

ABBC 24 72

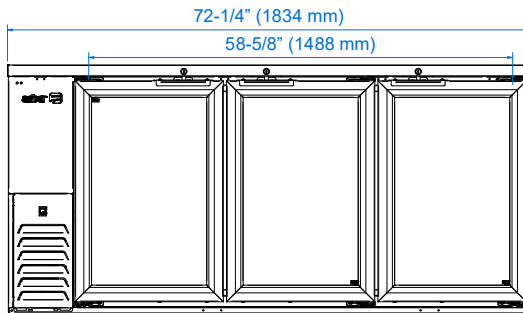

MODEL	ABBC 24 48	ABBC 24 60	ABBC 24 72
ELECTRICAL DATA			
Volts - Frequency	115V. - 50/60Hz.		
Power (HP)	1/3		
Full Amp Load	3.0		
Plug Type	NEMA 5-15P		
Refrigerant	R290		
INTERIOR DIMENSIONS (in)			
Width	36-1/8	48-5/8	58-5/8
Depth	17-5/8		
Height	30-1/4		
Shelf (in)	17-1/2 x 16-7/8	23-7/8 x 16-7/8	19-1/8 x 16-7/8
SHIPPING DIMENSIONS (in)			
Width	52	65	74-3/4
Depth	27-1/2		
Height	41-3/4		



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | VALID FOR CONTINENTAL USA & CANADA. | APR, 2026