

Refrigerated Display Cases

TAPAS
SUSHI




With many different versions of refrigerated display cases, Asber combines a **stylish European curve glass design** with a robust refrigeration system and cold plate floors to ensure proper temperature throughout the cabinet. For Sushi Cases we have added a top gravity coil along with a cold plate bottom for proper display of delicate products.

Interior will allow up to **11.5" plates for display** thru a rear service door which is ideal for most applications. Interior grate can be turned upside down to increase overall internal height and cooling capacity.

Many other features to include:

- Hermetic compressors with epoxy coated evaporator
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display
- Temperature: Tapas 36°F to -46°F / Sushi 32°F to -41°F based on an external environment of 90°F and 65% RH.
- LED interior lights: shadow-free illumination, last up to 10 times longer than fluorescent light, enhance product display.
- Interior stainless-steel construction with plastic ends and anodized aluminum profile.
- Refrigeration system with R-290 gas, CFC free.
- Compressor on the right side facing the unit.
- Includes drain underneath pans to keep unit clean.

**** Refrigerated Display Case - Not for overnight storage.**

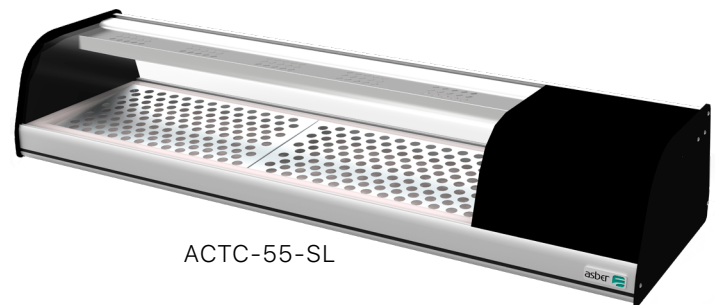

ACTC-55-SL



ACTC-69

OPTIONS & ACCESORIES

Voltage: 220V. - I - 50Hz.

	MODEL	DOORS	CAPACITY (Cu. Ft.)	AMPS	HP	VOLTS	Width	DIMENSIONS Depth	Height ¹	SHIPPING WEIGHT (lbs)
TAPAS LINE	ACTC-55	2	9.0	1.5	1/10	115/60	54 5/8"	16 1/8"	10 1/4"	119
	ACTC-69	2	13.9	1.5	1/10	115/60	68 3/8"	16 1/8"	10 1/4"	135
SUSHI LINE	ACTC-55-SL	2	9.0	1.5	1/10	115/60	54 5/8"	16 1/8"	10 1/4"	125
	ACTC-69-SL	2	13.9	1.5	1/10	115/60	68 3/8"	16 1/8"	10 1/4"	145


1. Sushi cases do not include pans. 2. Specifications are subject to change without prior notice.

Refrigerated Display Cases


TAPAS
SUSHI




ACTC-55 FRONT

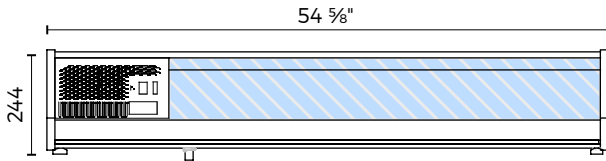


ACTC-69 FRONT

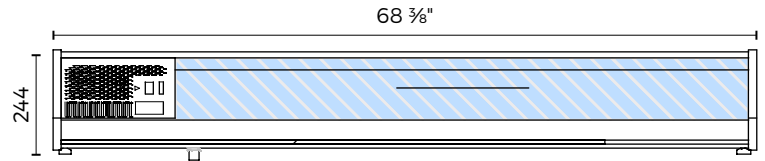


ACTC-55 FRONT

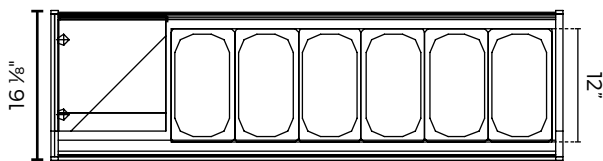

ACTC-69 FRONT

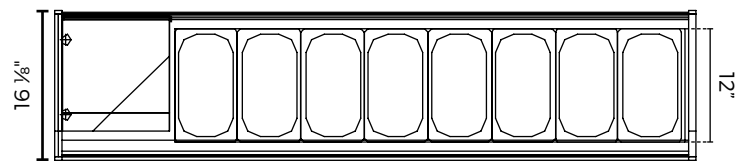

COMMON SIDE VIEW

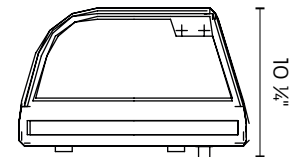

ELECTRICAL DATA	55"		69"	
	Tapas	Sushi	Tapas	Sushi
Voltage	115/60			
Plug Type	Nema 5-15P			
Full Amp. Loads	1.5			
Compressor HP	1/10			
Cord Length (ft)	10			
Refrigerant	R-290			
DIMENSIONAL DATA				
# of Doors	2			
Capacity (Cu. Ft.)	9.0		13.9	
Ext. Width Overall	54 5/8"		68 3/8"	
Ext. Depth Overall	16 1/8"			
Ext. Height Overall	10 1/4"			
# of Pans	6	N/A	8	N/A
Plates Size	12"			
Shipping Weight (lbs.)	119	125	135	145

1. Sushi cases do not include pans.

Standard Features

- Compressor on the right side facing the unit.
- Electronic controller with digital display
- Temperature: Tapas 36°F to -46°F / Sushi 32°F to -41°F based on an external environment of 90°F and 65% RH.
- LED interior lights: shadow-free illumination, last up to 10 times longer than fluorescent light, enhance product display.
- Self-contained Refrigeration with epoxy coated evaporator.
- Includes drain underneath pans to keep unit clean.

Options & Accesories Warranty

- Voltage: 220V. – 1 – 50 hz.

- 1-year parts & labor.
- 5-year compressor.

*RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.