

# Reach-in Freezers

SOLID DOORS FREEZERS



Stainless Steel is ideal for your kitchen environment for many reasons which include sanitation, hygiene and is the workhorse for your Restaurant. Asber ARF series reach-ins features a **stainless-steel exterior front and sides** with an galvanized back. **Complete stainless-steel interior** for the most rugged construction while, easiest to clean with coved corner floors to meet **NSF standards**. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Freezer is one of the most important factors for thermal efficiency. Asber only uses the **world's leader Ecomate (GWP) (ODP) insulation, 2-3/8" thick** for the highest R value efficiency for your environments.

Operators come in many sizes; Asber Reach-ins come with an ergonomically designed **full-length door handle**. In-step interior for a better seal and prevent sweating. Magnetic one-piece door gasket, removable without tools for ease of cleaning and replacement. **Stainless Steel hinges** for a durable long-lasting door.

With innovative and eco-friendly technology, Asber utilizes **R-290 Hydrocarbon** designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

Additional features to include:

- Door locks with universal key.
- Hermetic compressors with epoxy coated evaporator
- Field reversible doors on solid single door units.
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display
- Temperature: Freezers -4 °F to -8 °F based on an external environment of 90 °F and 65% RH.
- Accepts 18" x 26" sheet pans (except ARF-17 model).
- Standard with 5" castors, front with brakes.
- Units with LED lighting.
- Meets the NSF-7 standard for food safety.



ARF-23-H



ARF-49-H



ARF-72-H

## OPTIONS & ACCESORIES

Additional 2nd year warranty.

2.5" castors.

Voltage: 220V. - 1 - 50Hz.

Additional epoxy coated shelves.

6" adjustable stainless-steel legs.

MODEL	DOORS	SHELVES	CAPACITY (Cu. Ft.)	AMPS	HP	VOLTS	DIMENSIONS			SHIPPING WEIGHT (lbs)
							Width	Depth	Height	
ARF-23-H	1	3	23	4.3	1/2	115/60	27 5/8"	31 1/4"	80"	315
ARF-49-H	2	6	49	8.3	1	115/60	55 1/4"	31 1/4"	80"	500
ARF-72-H	3	9	72	9.5	1/2 x 2	115/60	82"	31 1/4"	80"	700


1. Height does not include 4" diameter castors (5" overall) or 6" legs. Specifications are subject to change without prior notice.

# Reach-in Freezers


SOLID DOORS FREEZERS




ARF-23-H FRONT

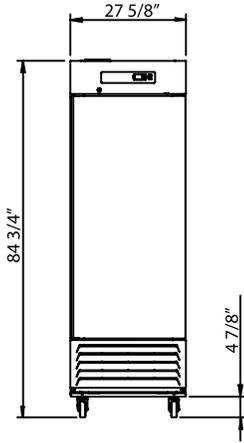


ARF-49-H FRONT

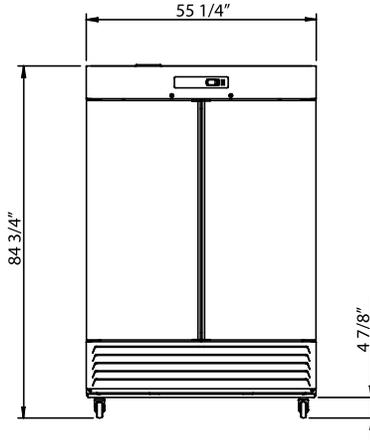


ARF-72-H FRONT

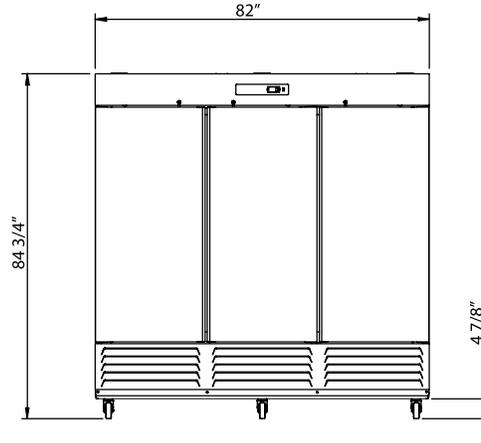

COMMON SIDE VIEW

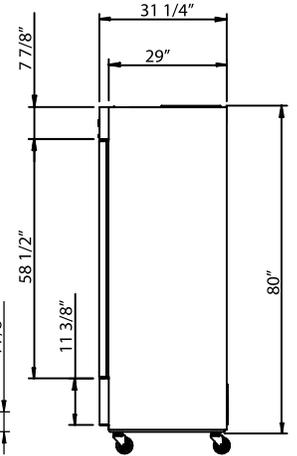

COMMON TOP VIEW



ELECTRICAL DATA	1 Door	2 Door	3 Door
Voltage	115/60		
Plug Type	Nema 5-15P		Nema 5-20P
Full Amp. Loads	4.3	8.3	9.5
Compressor HP	1/2	1	1/2 x 2
Cord Length (ft)	10		
Refrigerant	R-290		
DIMENSIONAL DATA			
# of Doors	1	2	3
Capacity (cu. ft.)	23	49	72
Ext. Width Overall	27 5/8"	55 1/4"	82"
Ext. Depth Overall	31 1/4"		
Ext. Height Overall	80"		
Int. Width Overall	23 1/8"	50 1/4"	77 1/8"
Int. Depth Overall	26 1/2"		
Int. Height Overall	56 1/4"		
# of Shelves - Std.	3	6	9
Shelf Size (L x D)	24 5/8" x 22 1/2"		
Shipping Weight (lbs.)	315	500	700

## Standard Features

- Stainless steel Interior and Exterior (except rear).
- 2-3/8" Ecomate CFC Free foam in place insulation.
- Electronic controller with digital display.
- Self-contained Refrigeration with epoxy coated evaporator.
- Field reversible on solid single door units.
- One-piece magnetic door gasket, removable without tools.
- Door locks with universal key.
- In step door design and full-length handle.
- Accepts full size 18" x 26" sheet pans.

## Options & Accesories Warranty

- Additional 2<sup>nd</sup> year warranty.
- 2.5" castors.
- Voltage: 220V. - 1 - 50Hz.
- Additional epoxy coated shelves.
- 6" adjustable stainless-steel legs.
- 1-year parts & labor.
- 5-year compressor.

\*RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

1. Height does not include 4" diameter castors (5" overall) or 6" legs.