

Undercounters

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS



Stainless Steel is ideal for your kitchen environment for many reasons which include sanitation, hygiene and is the workhorse for your Restaurant. Asber AUTR(F) series Undercounters features a **stainless-steel exterior front and sides** with an galvanized back. **Complete stainless-steel interior** for the most rugged construction while, easiest to clean with coved corner floors to meet **NSF standards**. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Refrigerator is one of the most important factors for thermal efficiency. Asber only uses the **world's leader Ecomate (GWP) (ODP) insulation, 2" thick** for the highest R value efficiency for your environments.

With innovative and eco-friendly technology, Asber utilizes

R-290 Hydrocarbon designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

Additional features to include:

- Hermetic compressors with epoxy coated evaporator
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Refrigerators with electromechanical controller / Freezers with electronic controller with digital display
- Temperature: Refrigerators 32°F to 41°F / Freezers -4°F to -8°F, based on an external environment of 90°F and 65% RH.
- Standard with 4" castors, front with brakes.
- Meets the NSF-7 standard for food safety



AUTR-27 / AUTF-27 HC



AUTR-60



AUTR-72

OPTIONS & ACCESORIES

- Additional 2nd year warranty.
- 2.5" castors.
- Voltage: 220V. - 1 - 50Hz.
- Additional epoxy coated shelves.
- 6" adjustable stainless-steel legs.




	MODEL	DOORS	SHELVES	CAPACITY (Cu. Ft.)	AMPS	HP	VOLTS	DIMENSIONS			SHIPPING WEIGHT (lbs)
								Width	Depth	Height ¹	
REFRIGERATORS	AUTR-27	1	2	6.4	1.5	1/10	115/60	27"	30"	36"	179
	AUTR-48	2	4	12.1	2.5	1/3	115/60	48"	30"	36"	260
	AUTR-60	2	4	15.3	2.5	1/3	115/60	60"	30"	36"	301
	AUTR-72	3	6	18.6	3.0	1/3	115/60	72"	30"	36"	342
FREEZERS	AUTF-27 HC	1	2	6.4	2.7	1/3	115/60	27"	30"	36"	180
	AUTF-48 HC	2	4	12.1	6.5	1/2	115/60	48"	30"	36"	265

1. Height includes 4" diameter castors (5" overall). 2. Depth does not include 1" for rear bumper. 3. Specifications are subject to change without prior notice.

Undercounters

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS

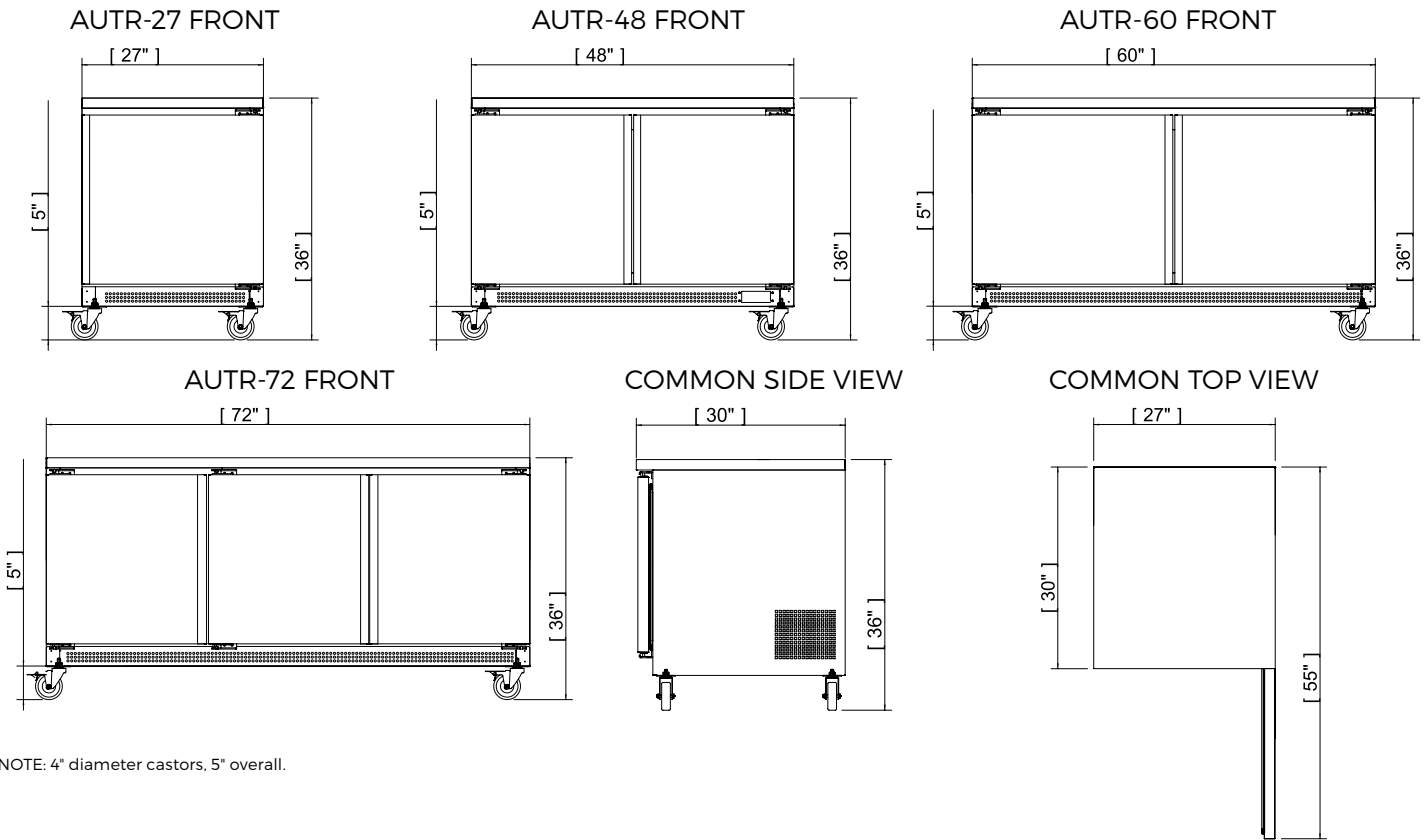

NOTE: 4" diameter castors, 5" overall.

ELECTRICAL DATA	27"		48"		60"	72"
	Ref.	Frz.	Ref.	Frz.	Ref.	
Voltage	115/60					
Plug Type	Nema 5-15P					
Full Amp. Loads	1.5	2.7	2.5	6.5	2.5	
Compressor HP	1/10	1/3		1/2	1/3	
Cord Length (ft)	10					
Refrigerant	R-290					
DIMENSIONAL DATA						
# of Doors	1		2		3	
Capacity (cu. ft.)	6.4		12.1		15.3	18.6
Ext. Width Overall	27"		48"		60"	72"
Ext. Depth Overall	30"					
Ext. Height Overall	36"					
# of Shelves - Std.	2		4		6	
Shelf Size (L x D)	14 3/4" x 22"		20 7/8" x 15"		26 7/8" x 15"	14 3/4" x 22" 20 7/8" x 15"
Shipping Weight (lbs.)	179	180	260	265	301	342

1: Height includes 4" diameter castors (5" overall).
2: Depth does not include 1" for rear bumper.

Standard Features

- Stainless steel Interior and Exterior (except rear).
- 2" Ecomate CFC Free foam in place insulation.
- Self-contained Refrigeration with epoxy coated evaporator.
- One-piece magnetic door gasket, removable without tools.
- In step door design and full-length handle.

Options & Accessories Warranty

- Additional 2nd year warranty.
 - 2.5" castors.
 - Voltage: 220V. - 1 - 50Hz.
 - Additional epoxy coated shelves.
 - 6" adjustable stainless-steel legs.
 - 1-year parts & labor.
 - 5-year compressor.
- *RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.