

Undercounter Refrigerators & Freezers

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS



BUILT TO PERFORM, DESIGNED TO DELIVER

The Asber AUTR (Refrigerator) and AUTF (Freezer) Series Undercounters are engineered to be the cornerstone of any commercial kitchen, combining durability, hygiene, and efficiency in a compact footprint. Built with a stainless-steel front and sides, these units are designed for the demanding conditions of professional foodservice environments. The interior is fully constructed of stainless-steel, offering maximum strength, long-lasting durability, and easy cleaning. Coved corner floors meet NSF standards, ensuring optimal sanitation and food safety compliance in daily operations.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy-savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Refrigerators: Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Freezers: Electronic controller provides precise, easy-to-monitor temperature management.

- Temperature ranges in ambient conditions up to 100°F and 65% RH:
 - Refrigerators: 32°F to 38°F. / Freezers: 0°F to -8°F.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Field-reversible doors on solid single-door models for flexible installation.
- Designed for space optimization, fitting seamlessly beneath standard countertops or work surfaces.

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- Full-length recessed handles: Provide ergonomic access while maintaining a clean, professional appearance.
- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Standard 5" casters (front with brakes) provide stability, mobility, and easy access for cleaning and maintenance.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- Overshelf.
- Extra shelves.
- Removable 4" stainless-steel backsplash.



AUTR 27



AUTR 36




AUTR 72

MODEL	DOORS	SHELVES	CAPACITY	VOLTS - FREQUENCY	POWER	AMP	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft³		HP		Width	Depth	Height	Lbs	ft³
UNDERCOUNTER REFRIGERATORS											
AUTR 27	1	1	6.9	115V. - 60Hz.	1/10	1.5	27	30-1/8	36-1/8	185	24.7
AUTR 36	2	2	9.2	115V. - 60Hz.	1/10	1.5	36-1/8	30-1/8	36-1/8	196	28.3
AUTR 48	2	2	13.3	115V. - 60Hz.	1/4	2.5	48	30-1/8	36-1/8	254	38.8
AUTR 60	2	2	16.8	115V. - 60Hz.	1/4	2.5	60	30-1/8	36-1/8	273	45.9
AUTR 72	3	3	20.6	115V. - 60Hz.	1/4	2.5	72	30-1/8	36-1/8	315	56.5
UNDERCOUNTER FREEZERS											
AUTF 27	1	1	6.9	115V. - 60Hz.	1/3	2.7	27	30-1/8	36-1/8	254	24.7
AUTF 48	2	2	13.3	115V. - 60Hz.	1/2	6.5	48	30-1/8	36-1/8	273	38.8
AUTF 60	2	2	16.8	115V. - 60Hz.	1/2	6.5	60	30-1/8	36-1/8	315	45.9

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | APR, 2026

Undercounter Refrigerators & Freezers

UNDERCOUNTER REFRIGERATORS
UNDERCOUNTER FREEZERS

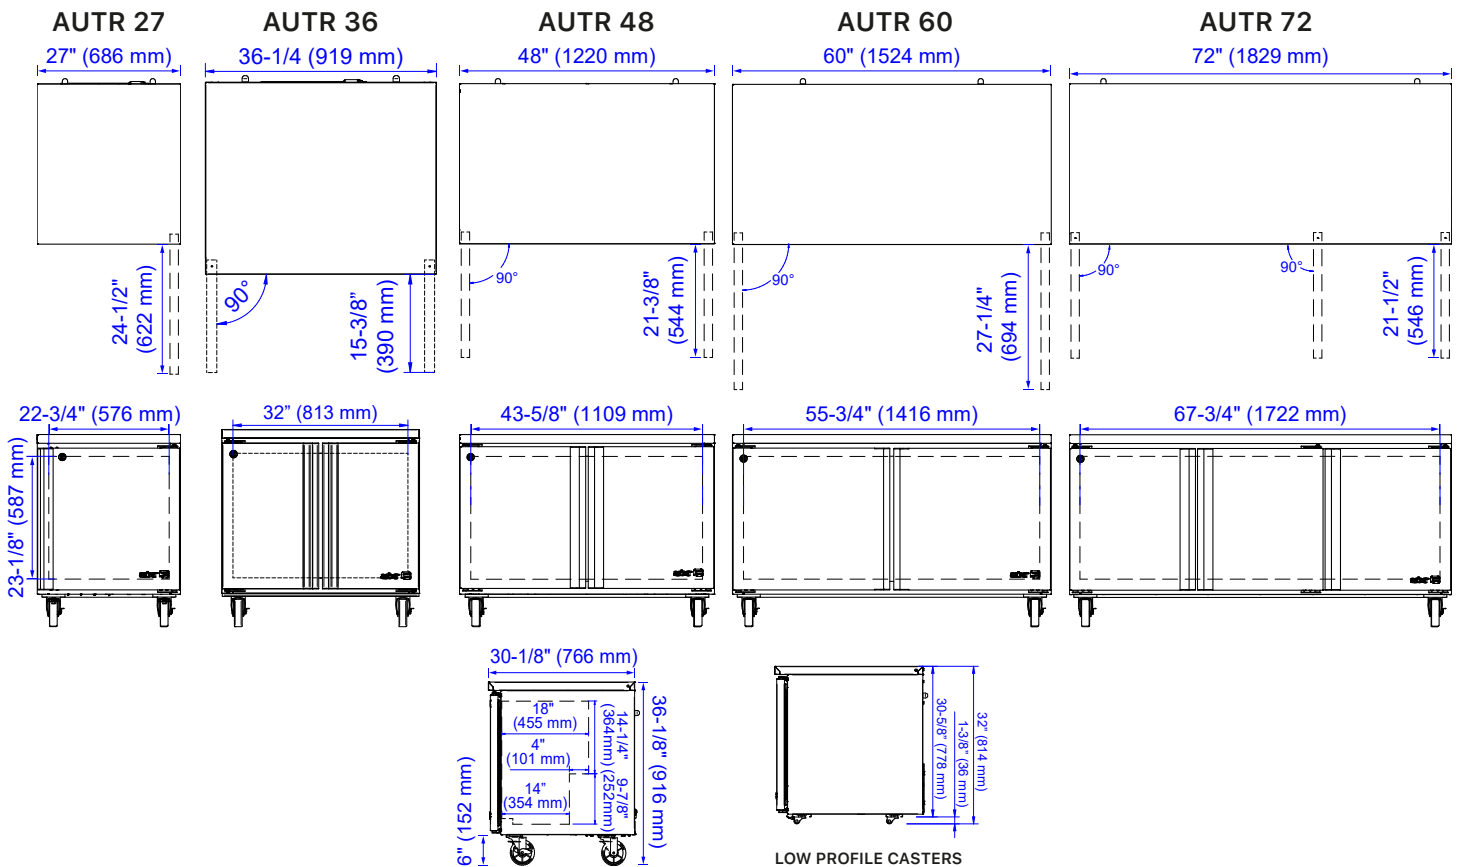

MODEL	27"		36"	48"		60"		72"
	AUTR	AUTF	AUTR	AUTR	AUTF	AUTR	AUTF	AUTR
ELECTRICAL DATA								
Volts - Frequency	115V. - 60Hz.							
Power (HP)	1/10	1/3	1/10	1/4	1/2	1/4	1/2	1/4
Full Amp Load	1.5	2.7	1.5	2.5	6.5	2.5	6.5	2.5
Plug Type	NEMA 5-15P							
Refrigerant	R290							
INTERIOR DIMENSIONS (in)								
Width	22-5/8		32	43-5/8		55-3/4		67-3/4
Depth	17-7/8							
Height	24-1/4							
Shelf (in)	22	x 14-5/8	15-7/8 x 15	20-1/2 x 14-5/8		26-5/8 x 14-5/8		22 x 14-5/8 20-1/2 x 14-5/8
SHIPPING DIMENSIONS (in)								
Width	31-1/2		40-1/8	52-3/8		64-1/8		76
Depth	33-1/2							
Height	37-3/4							



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.

- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | APR, 2026