



**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)  
[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)  
California, Colorado, Florida, Georgia, Illinois,  
Massachusetts, New Jersey, Ohio, Texas, Washington

# Bottom Mount Reach-In Freezers

## Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

## Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf  
MBF8501GR shelf part #: W0402393  
MBF8503GR shelf part #: W0402387  
MBF8504 left and right shelf part #: W0402196  
MBF8504 middle shelf part #: W0402198



MBF8503GR

For the best results of food preservation we recommend setting your freezer between -8 °F to 0 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)

ATOSA USA

## MODELS:

MBF8501GR / MBF8503GR / MBF8504



MBF8501GR



MBF8503GR



MBF8504



\*For confirmation and updates on the latest energy star models, please visit [energystar.gov](http://energystar.gov)\*



**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior dimensions (inch)	Net weight (lbs)	Gross weight (lbs)
MBF8501GR	1	19.1	3	4	6.3	115/60/1	1/2	R290	27×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	265	298
MBF8503GR	2	44.8	6	4	8.6	115/60/1	3/4	R290	54 <sup>2/5</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	410	465
MBF8504	3	68	9	4	5.5	208-230/115/60/1	1 <sup>1/4</sup>	R404A	81 <sup>9/10</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>	551	628

## PLAN VIEW






**MBF8501GR**

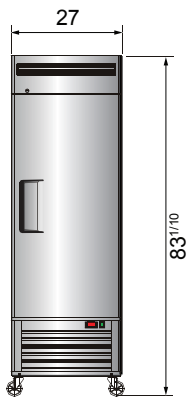

**MBF8503GR**



**MBF8504**

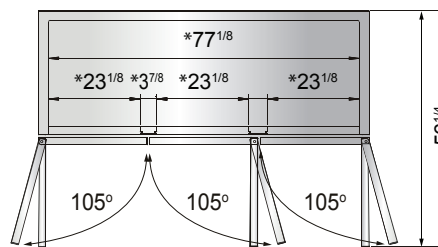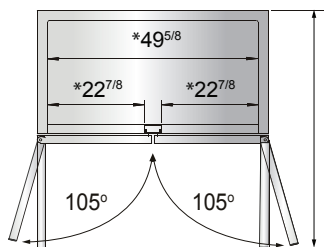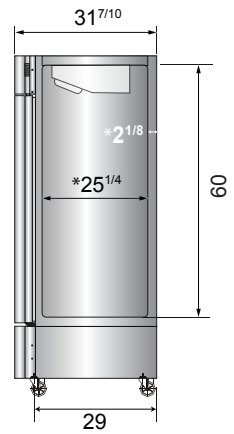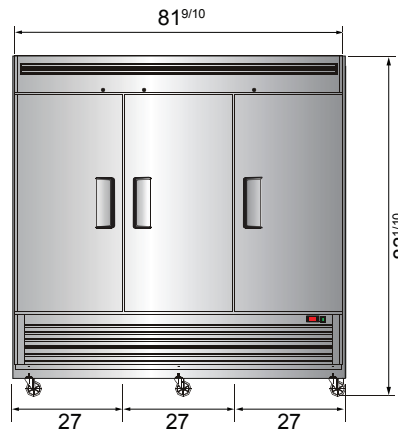

\*Interior Dimensions

SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters

Epoxy shelves

Door lock



Down duct

Temperature control



MBF8501GR  
MBF8503GR

MBF8504



GROUND  
115/208-230/60/1  
NEMA-L14-20R  
Unit completely pre-wired at factory and ready for final connection to a 115/208-230/60Hz single phase - 20 amp dedicated outlet. Cord and plug set included.  
\*MBF8003 Only