

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD36HC Solid Door Single Tower With Dual Faucets Hydrocarbon Series

MODEL: DD36HC-1-B DD36HC-1-S



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is wear resistant black vinyl coated steel with galvanized steel back or stainless steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy-duty stainless steel
- Full electronic control
- Single tower with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door lock
- Self-closing door with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

(black model shown)

- Custom tower hole location
- · Drip tray location option
- 1 Half keg option
- Wine/coffee models
- Faucet locks
- Glass rinser
- 3"-6" casters or 6" black legs
- 1-4 Tap tower
- 2, 3 & 4 way manifolds
- Sub-top
- No draft arm/ hole cover option
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F















MODEL	DD36HC-1-B DD36HC-1-S
EXTERNAL DIMENSIONAL DATA	
Width Overall	36"
Depth Overall	24 1⁄4"
Height Overall (floor to top of tap)	51 ¼"
Number of Doors	1
Depth with Door Open 90°	50 ¾"
Door Opening (in)	23 ¾" x 29" ½"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	8.31
Internal Width Overall (in)	24 ¼"
Internal Depth Overall (in)	18 %"
Internal Height Overall (in)	29 ½"
Number of 1/2 Kegs	1
ELECTRICAL DATA	
Full Load Amperes	2.5
REFRIGERATION DATA	
Horsepower*	1/4
Capacity (BTU/Hr)*	1702
SHIPPING DATA	
Gross Weight - Crated	250 lbs
Height - Crated	43"
Width - Crated	39"
Depth - Crated	27"

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

BM23/DD24/DD36 KEG CAPACITY:










1 Std. ½ Keg

4 X 1/6

2 X 1/6 1 X 1/4 Slim

2 X 1/4 Slim

Bar Equipment-Direct Draw Beer Dispenser Model: DD36HC-1-B, DD36HC-1-S

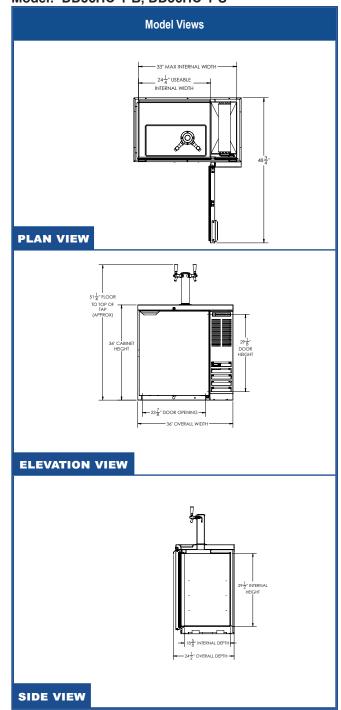















*ELECTRICAL CONNECTION



Units pre-wired at factory 115/60/1 NEMA 5-15P and include 8' long cord and plug set.