



BEVERAGE-AIR®

Project: _____	AIA# _____
Item: _____	
Location: _____	SIS# _____
Approved: _____	

PRF12-12HC TOP MOUNT DUAL TEMP REACH-IN

P SERIES TOP MOUNT DUAL TEMPERATURE

PRF12-12HC Solid Half-Door Refrigerator/Freezer

Hydrocarbon Series

MODEL:
PRF12-12HC-1HS



7 Year Parts/Labor Warranty
7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior door, sides, and front (galvanized top, back & bottom)
- Interior corrosion resistant aluminum
- Stainless steel door liner
- Full electronic control with exterior digital thermometer
- Expansion valve technology
- Variable speed technology
- Stainless steel braker covers
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Top section refrigerator
- Bottom section freezer
- Self-closing doors on cam-lift hinges, with 120° hold open feature
- One-piece snap-in magnetic door gaskets for positive seal
- Door locks standard
- Four (4) heavy-duty epoxy coated shelves
- 6" Legs

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Zone operating temperature configuration (R/R, F/R, F/F)
- Tray slide kit
- Left and right hand door swing (at time of order)
- 6" Casters or seismic/flanged legs
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerator maintains product temperatures of 36° - 38°F
- Freezers maintains product temperatures of -10°F



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®

MODEL	PRF12-12HC-1HS
EXTERNAL DIMENSIONAL DATA	
Width Overall	26 1/2"
Depth Overall with Handle	34 7/8"
Height Overall	84 1/8"
Number of Doors	2
Depth with Door Open 90°	57 1/2"
Door Openings (in)	21 1/2" x 24 3/4"
INTERNAL DIMENSIONAL DATA	
NET Capacity Refrigerator/Freezer (cubic ft.)	9.0 / 9.0
Internal Width Overall (in)	22 1/2"
Internal Depth Overall (in)	26"
Internal Height Overall Top (in)	26 5/8"
Internal Height Overall Bottom (in)	21 3/4"
Number of Shelves	4
ELECTRICAL DATA	
Full Load Amperes** Refrigerator/Freezer	7.5 / 7.5
Voltage	(2) 115/60/1
Nema Plug (8' cord)	5-15P
REFRIGERATION DATA	
Horsepower Refrigerator/Freezer	1/3 / 1/3
Capacity (BTU/Hr) Refrigerator/Freezer	3000 / 3000
Heat Rejection (BTU/Hr) Refrigerator/Freezer	4500 / 4500
Charge (lbs/grams/ounces) Refrigerator/Freezer	0.165 / 74.8 / 2.6 0.165 / 74.8 / 2.6
SHIPPING DATA	
Gross Weight - Crated lbs	425 lbs
Height - Crated	88"
Width - Crated	41"
Depth - Crated	36"

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements,
additions or replacements for previously purchased equipment. Dimensional
tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL CONNECTION



(2) 115/60/1**
NEMA 5-15P


Unit pre-wired at factory
and include 8' long cord
and plug set.

** NOTE: Units that utilize variable speed compressor technology can experience
nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To
avoid this issue in a location that requires GFCI circuit protection, Beverage-Air
recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W
20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.


P Series Top Mount Dual Temp Reach-In Model: PRF12-12HC-1HS

Model Views


Required Clearance: Top 12"



PLAN VIEW

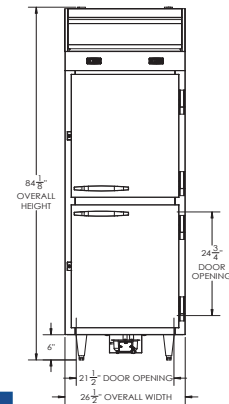

ELEVATION VIEW

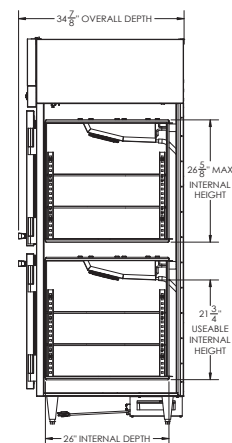

SIDE VIEW

