

PROJECT:	
MODEL #:	
ITEM #:	QTY:
AVAILABLE W/H:	APPROVAL:

Undercounter Drawer Models



BLUR28-D2-HC



BLUR48-D4-HC
BLUR60-D4-HC



BLUR72-D4LM-HC



BLUR72-D4RM-HC



BLUR72-D6-HC

STANDARD FEATURES

Cabinet construction

- Stainless steel cabinet construction
Stainless steel interior and exterior (galvanized steel back & bottom).
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly
- Four (4) 4" diameter swivel casters with front brakes standard.

Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Self-contained system, rear mounted compressor.

- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Refrigerators have a temperature range between 33°F ~ 39°F

Drawer

- Durable drawer gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal handles. (Ni-Cr Plated)

Design

- Self-diagnostic digital temperature control & monitor system

- Digital display allows for easy monitoring
Digital controls include automatic evaporator fan motor delay.
- Rounded corner design gives a stylish appearance and reduces chances of injury.

Standard

- NSF/ANSI Standard 7 compliant

Connection

- 9 ft long flexible three wire cord with molded plug

Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable feet available

WARRANTY

3 Years Parts and Labor
5 Years on Compressor in USA

APPROVALS:


AVAILABLE AT:

Undercounter Drawer Models


PRODUCT PLAN VIEW

- Front View -


- Side View -





BLUR28-D2-HC




BLUR48-D4-HC

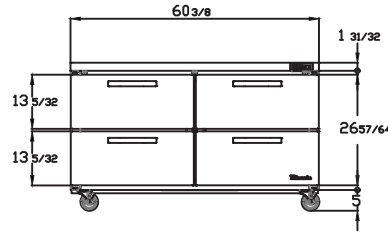


BLUR60-D4-HC

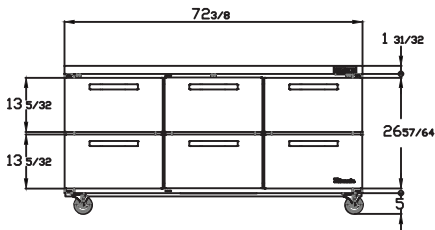

BLUR72-D6-HC

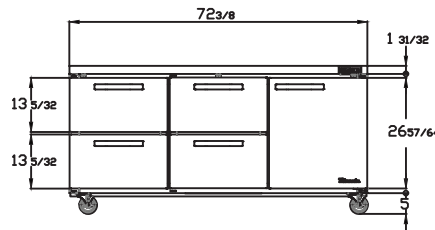


BLUR72-D4LM-HC

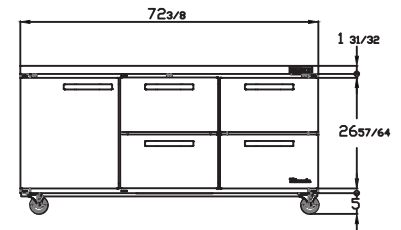

BLUR72-D4RM-HC

Pan Configuration



TOP DRAWER



BOTTOM DRAWER

BLUR28-HC




TOP DRAWER



BOTTOM DRAWER

BLUR48/72-HC




TOP DRAWER



BOTTOM DRAWER

BLUR60-HC



Drawers accommodate 6 inch pans

PRODUCT SPECIFICATION

Model	Product Description			Refrigerant	Temperature Range	Easy Maintenance			Cord Length (ft/m)			
	Undercounter Drawer Models			R-290	33°F ~ 39°F	Sliding Condensing Unit			9.8ft (3m)			
	Drawers	Capacity (Cu.Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA config.	Weight (lbs / kg)	
L				D	H	Net Weight					Ship Weight	
BLUR28-D2-HC	2	7	N/A	27 1/2 (699mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	4	NEMA 5-15	163 (74)	196 (89)
BLUR48-D4-HC	4	13.1	N/A	48 3/8 (1227mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	5	NEMA 5-15	238 (108)	291 (132)
BLUR60-D4-HC	4	16.7	N/A	60 3/8 (1533mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	5	NEMA 5-15	271 (123)	328 (149)
BLUR72-D4RM-HC	4	20.2	1	72 3/8 (1839mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	5.2	NEMA 5-15	304 (138)	373 (169)
BLUR72-D4LM-HC	4	20.2	1	72 3/8 (1839mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	5.2	NEMA 5-15	304 (138)	373 (169)
BLUR72-D6-HC	6	20.2	N/A	72 3/8 (1839mm)	33 1/32 (839mm)	35 7/8 (912mm)	1/4	115V / 60Hz	5	NEMA 5-15	328 (149)	397 (180)

*BLUE AIR has the right to change specifications without further notice.