

PROJECT:	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	APPROVAL :

## Glass Door Merchandiser



BKG23-HC



BKG49-HC



BKG72-HC

## STANDARD FEATURES

### Cabinet construction

- Black or white painted steel exterior and white painted steel interior.
- High density foamed in place polyurethane insulation – Environmentally safe.
- Sturdy, epoxy coated wire shelves with adjustable shelving height.
- 4 shelves for each compartment
- 2.5" Diameter swivel casters with front brakes. Four casters on one- and two-door models and six on three-door models (two casters on each model have front brakes)

### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Front sliding refrigeration unit allows the unit to be serviced without being moved.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance

- Epoxy coated evaporator reduces potential corrosion.
- Refrigerator has a temperature range between 33°F ~ 39°F

### Doors

- Self closing doors (doors close at 90° or less) Automatic hold open door feature at 110° Durable door gasket with easy replacement.
- Heavy duty recess door handles
- Door designed to open easily. Doors built with pressure relievers to eliminate vacuum pressure and allow easy door opening.
- Standard door locks
- Double pane glass

### Design & Features

- Digital temperature control & monitor system Keep food products safe by maintaining constant temperatures.
- Digital display allows for easy monitoring.

- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Controls include automatic evaporator fan motor delays.

### Lighting

- LED backlit graphic panel
- Interior Vertical LED lighting

### Standard

- NSF/ANSI Standard 7 compliant

### Connection

- 9 ft long flexible three wire cord with molded plug

### Optional Features & Accessories

- Additional shelves are available

### WARRANTY

2 Years Parts and Labor  
5 Years on Compressor in USA


### APPROVALS:

### AVAILABLE AT:


# Glass Door Merchandiser

## PRODUCT PLAN VIEW


- Top View -

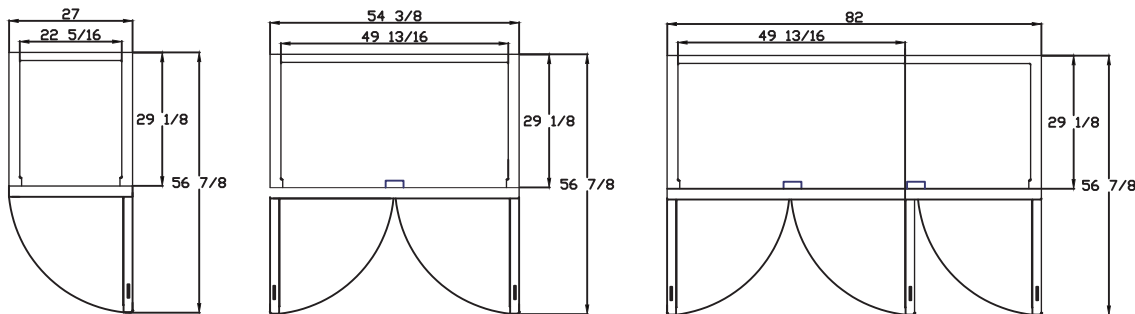

- Front View -

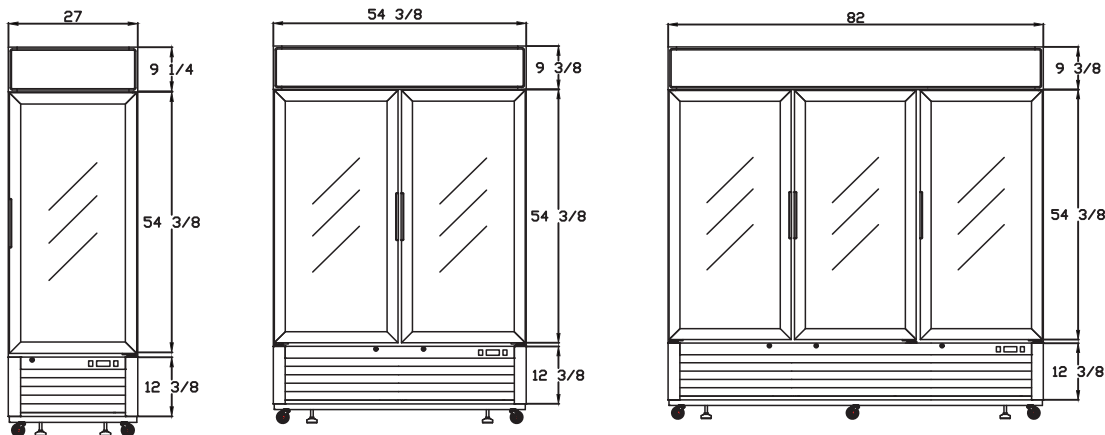

- Side View -

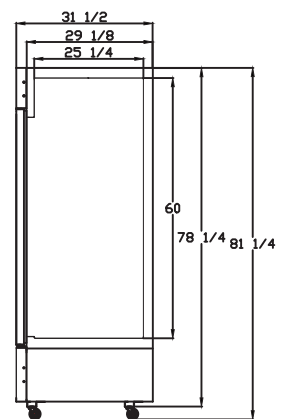

**BKGM23-HC**

**BKGM49-HC**

**BKGM72-HC**

## PRODUCT SPECIFICATION

Model	Product Description						Refrigerant			Temperature Range	
	Glass Door Merchandiser Refrigerator						R-290			33 ~ 39 °F	
	Easy Maintenance				Voltage		NEMA Config.			Cord Length (ft/m)	
	Sliding Condensing Unit				115V/60Hz		NEMA5-15			9.8ft (3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			Foot	HP	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
L				D	H						
BKGM23-HC	1 Swing Door	23	4	27"(685mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4 Casters	1/7	2.1	293 (133)	324 (147)
BKGM49-HC	2 Swing Doors	49	8	54 3/8"(1382mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4 Casters	1/7	3.2	485 (220)	545 (247)
BKGM72-HC	3 Swing Doors	72	12	82" (2079mm)	31 1/2" (800mm)	81 1/4" (2065mm)	6 Casters	1/4	4.2	653 (296)	758 (265)

\*BLUE AIR has the right to change specifications without further notice.