

BLUELM

FRYER
FOUR TUBE BURNER
BLF4-LPG / BLF4-NG 6 gallon / 50lbs

PRODUCT DESCRIPTION



Expanded "Hot Zone", due to 4 super efficient cast iron tube burners in each Fryer. Even heat distribution and quick recovery. Oil temperature fluctuations are regulated by a heavy-duty probe that activates a climate assist burner for reliable and even heat consistency.



Millivolt safety control system regulates temperatures for BLF4-LPG/NG. Temp range of control is 200 - 400 degrees Fahrenheit.



ALL areas of the internal frypot can be reached and cleaned by hand. No "out of reach" zones.



Oversized cold zone and gently pitched frypot floor promote particle and sediment collection toward the front of the Fyer for easy removal and cleaning. Larger Cold zone and localized sediment collection allows for cleaner and longer lasting oil usage.

FRYER MODEL	DIMENSION			
	Width	Depth	Height	
BLF4-NG	15 1/2in	32 7/8in	45in	
BLF4-LPG	15 1/2in	32 7/8in	45in	

* All measures are presented in Inches










T: 908.688.0970 F: 908.688.8143

DETAILS & SPECIFICATIONS

FRYER FOUR TUBE BURNER BLF4-LPG / BLF4-NG

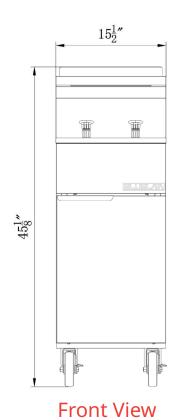

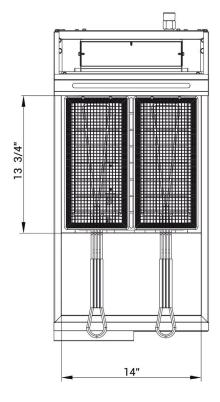

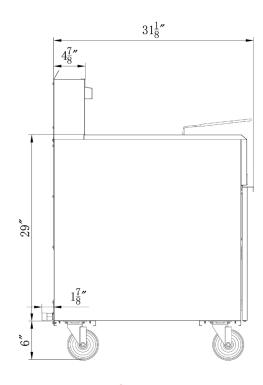

Top View

Side View

BLF4LPG						
GAS SOURCE	LPG					
WORK AREA	14.01x13.98in					
BURNER	4 count					
SINGLE BURNER	30000 BTU/H					
COMBINED	120000 BTU/H					
OIL TANK CAPACITY	6 gallon / 50lbs					
GAS PRESSURE	10 "WC					
NOZZEL	52#					
CONTAINER FITMENT	130					

BLF4-NG						
GAS SOURCE	NG					
WORK AREA	14.01x13.98in					
BURNER	4 count					
SINGLE BURNER	30000 BTU/H					
COMBINED	120000 BTU/H					
OIL TANK CAPACITY	6 gallon / 50lbs					
GAS PRESSURE	4 "WC					
NOZZEL	<i>3</i> 9#					
CONTAINER FITMENT	130					
	<u>-</u>					

Model	Packaging Dimensions (inches)			Net Weight	Ship Weight
Model	W	D	Н	(lbs)	(lbs)
BLF4-LPG	17 7/8"	<i>35 3/8"</i>	37 5/8"	176.37	198.42
BLF4-NG	17 7/8"	<i>35 3/</i> 8"	<i>37 5</i> /8"	176.37	198.42







F: 908.688.8143