

BLUELM

FRYER FIVE TUBE BURNER BLF5-LPG / BLF5-NG 8.3 gallon / 70lbs

PRODUCT DESCRIPTION



Expanded "Hot Zone", due to 5 super efficient cast iron tube burners in each Fryer. Even heat distribution and quick recovery. Oil temperature fluctuations are regulated by a heavy-duty probe that activates a climate assist burner for reliable and even heat consistency.



Millivolt safety control system regulates temperatures for DCF5-LPG/NG. Temp range of control is 200 - 400 degrees Fahrenheit.



ALL areas of the internal frypot can be reached and cleaned by hand. No "out of reach" zones.



Oversized cold zone and gently pitched frypot floor promote particle and sediment collection toward the front of the Fyer for easy removal and cleaning. Larger Cold zone and localized sediment collection allows for cleaner and longer lasting oil usage.

MODFI#	DIMENSIONS			
MODLL#	Width	Depth	Height	
BLF5-NG	21 in	32 7/8in	45in	
BLF5-LPG	21 in	32 7/8in	45in	

* All measures are presented in Inches










9 W. Shelton Terrace #A Hillside, NJ 07025

T: 908.688.0970 F: 908.688.8143

DETAILS & SPECIFICATIONS

FRYER FIVE TUBE BURNER BLF5-LPG / BLF5-NG

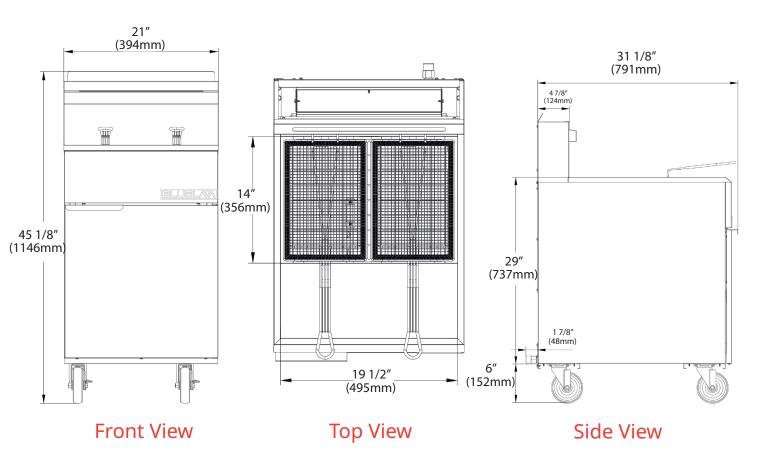

BLF5-LPG				
GAS WORK AREA BURNERS BTU/H PER BUNER TOTAL BTU/H	LPG 19.49x13.98in 5 30,000 150,000 8.3 gallon / 70lbs			
OIL TANK CAPACITY GAS PRESSURE NOZZEL CONTAINER FITMENT	8.3 gallon / 70lbs 10 "WC 52# 92			

BLF5-NG				
GAS WORK AREA BURNERS BTU/H PER BUNER TOTAL BTU/H OIL TANK CAPACITY GAS PRESSURE	NG 19.49x13.98in 5 count 30,000 150,000 8.3 gallon / 70lbs 4 "WC			
NOZZEL CONTAINER FITMENT	39# 92			

Model	Packaging Dimensions (inches)			Net Weight	Ship Weight
	W	D	Н	(lbs)	(lbs)
BLF5-LPG	23 7/8"	<i>35 3/8"</i>	37 5/8"	220.46	246.92
BLF5-NG	23 7/8"	<i>35 3/8"</i>	<i>37 5/</i> 8"	220.46	246.92







T: 908.688.0970 F: 908.688.8143