
H10X-80-240

34.4" x 24.5" x 10.2" (87.4cm x 62.2cm x 25.9cm)



- Includes dry-plug prevention for easy installation
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods

Dispenses up to 24gal (90.85L) of boiling water per hour for food



Servers and airpots sold separately





prep and cleaning



Specifications

Product #: 26300.0000

Finish: Stainless
Faucet: Upper

Temp. Setting: 212°F (100.000°C)

Water Access: Plumbed

Electrical & Capacity

| Volts | Amps | Watts | Cord Attached | Plug Type | 8oz cups/hr 236ml cups/hr | Input H ² O Temp. | Phase | # Wires plus Ground | Hertz |
|-------|------|-------|------------------|-----------|------------------------------|---------------------------------|-------|------------------------|-------|
| 240 | 33.5 | 8050 | No | - | - | 60°F (15.5°C) | 1 | 2 | 50/60 |

Plumbing Requirements

| | PSI | kPa | Fitting Supplied | Water Flow Required (GPM) | | |
|--|-------|---------|-------------------------|---------------------------|---|--|
| | 20-90 | 138-621 | 1/4" Male Flare Fitting | - | ſ | |

CAD Drawings


Additional Features


| 2D | Revit | KLC |
|----|-------|-----|
| • | | |



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Created on: 08/31/2017



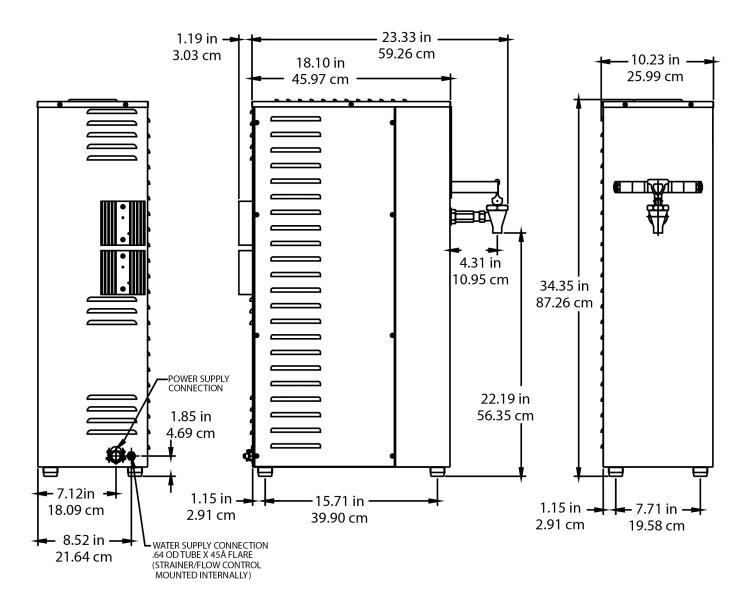

| | Unit | | | | Shipping | | | | | |
|---------|----------|----------|----------|----------|----------|----------|------------|-----------------------|--|--|
| | Width | Height | Depth | Width | Height | Depth | Weight | Volume | | |
| English | 10.2 in. | 34.4 in. | 24.5 in. | 13.6 in. | 39.0 in. | 27.5 in. | 67.300 lbs | 7.543 ft ³ | | |
| Metric | 25.9 cm | 87.4 cm | 62.2 cm | 34.5 cm | 99.1 cm | 69.9 cm | 30.527 kgs | 0.214 m³ | | |



Related Products & Accessories:H10X-80-240(26300.0000)





