# JDF-4S, 120V LIT PB W/4 SEG GFX

33.1" x 27.5" x 15.0" (84.1cm x 69.9cm x 38.1cm)



- Patented High Intensity Mixing System delivers consistent quality in the cup --- cup after cup, from the top of the cup to the bottom
- Includes variety-pack of eight displays: Apple Juice; Cranberry Juice; Grape Juice; Lemonade; Orange Juice; Pineapple Juice; Prune Juice; Iced Tea
- LED lighted door graphics bring high visibility to front-of-house applications
- One dispenser delivers both frozen and ambient products, to maximize profitability by providing greater flexibility in product offerings
- 18lb (8.2 kg) ice bank provides superior cold drink capacity
- Push Button Push-and-hold model. Can also be re-set for a single size portion dispense.
- 7" (17.8cm) cup clearance accommodates most juice containers
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4ml) per second flow rate
- Door lock standard
- ADA compliant dispense switch kit model available for self-serve locations
- Service friendly design makes set up and maintenance simple

#### Agency:





#### **Specifications**

Product #: 37300.0079 Refrige

Flavors: 4 Flavors

Water Access: Plumbed

Finish: Black

Door: Lit

Refrigerant: R-134A

Ice Bank: 18.00 lbs (8.165 kgs)

Dispense: Push Button

**Dispense:** Single Size Portion Control

#### **Electrical & Capacity**

| Volts | Amps | Watts | Cord<br>Attached | Plug Type  | 8oz cups/hr<br>236ml cups/hr | Input H <sup>2</sup> O<br>Temp. | Phase | # Wires<br>plus Ground | Hertz |
|-------|------|-------|------------------|------------|------------------------------|---------------------------------|-------|------------------------|-------|
| 120   | 6    | 720   | Yes              | NEMA 5-15P | -                            | 60°F (15.5°C)                   | 1     | 2                      | 60    |

### Plumbing Requirements

| PSI    | kPa     | Fitting Supplied        | Water Flow Required (GPM) |
|--------|---------|-------------------------|---------------------------|
| 20-100 | 138-689 | 3/8" Male Flare Fitting | -                         |

#### **CAD Drawings**

Additional Features


| 2D | Revit | KLC |
|----|-------|-----|
| •  |       |     |

Created on:

01/12/2018



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

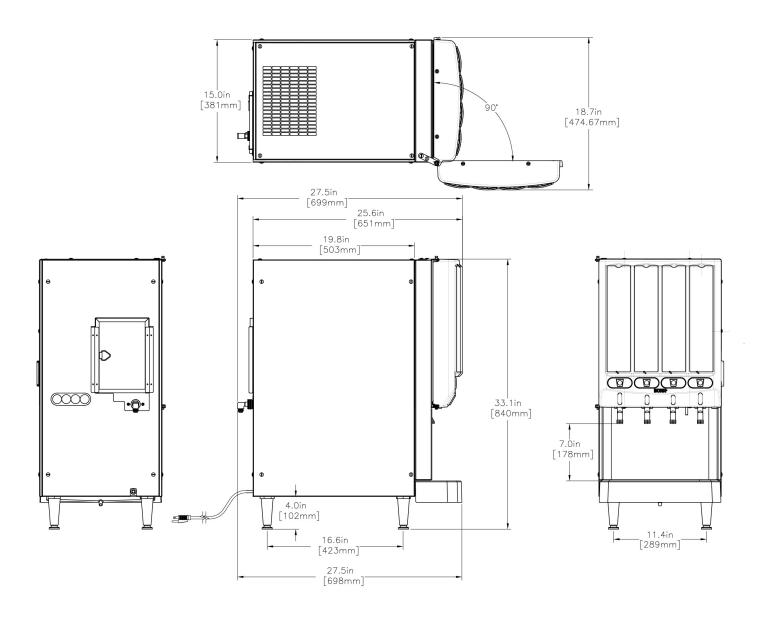

| Unit    |          |          |          | Shipping |        |       |        |        |
|---------|----------|----------|----------|----------|--------|-------|--------|--------|
|         | Width    | Height   | Depth    | Width    | Height | Depth | Weight | Volume |
| English | 15.0 in. | 33.1 in. | 27.5 in. | - in.    | - in.  | - in. | -      | -      |
| Metric  | 38.1 cm  | 84.1 cm  | 69.9 cm  | - cm     | - cm   | - cm  | -      | -      |




### Related Products & Accessories: JDF-4S, 120V LIT PB W/4 SEG GFX(37300.0079)

















JDF-2S/4S

Product #: 39690.0000

# Serving & Holding Options: JDF-4S, 120V LIT PB W/4 SEG GFX(37300.0079)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

