# NITRON® Cold Draft Countertop 4:1 - 12:1

Height: 34.0" Width: 29.8" Depth: 9.8" (86.4cm) (75.7cm) (24.9cm)



- Serve different coffees or teas, one Nitro and one Still, using two 1-gallon ball-valve concentrate BIBs or BUNN refillable containers
- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Mounted on standard 3/8"-16 UNC threads, chrome plated brass tap handles are interchangeable with custom handles for a more personalized look
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- Sleek, all-black door complements any commercial setting
- Flashing red LED light on door alerts the operator when to replenish nitrogen tank
- At a rate of one 16oz drink per minute, can dispense 60 drinks before exceeding 41°F (using 75°F incoming water)
- Refrigerated product cabinet protects flavor integrity and product life
- Large dispense area accommodates taller cups and carafes up to 8.76"
- · Service-friendly design makes set-up and maintenance simple

Agency:



Additional Features

### Specifications

Product #: 51600.0016

Flavors: 2 Flavors

Product Ratio: 4:1-12:1

Connector: Ball-valve

Water Access: Plumbed Finish: Black Door: Un-Lit Refrigerant: R-134A

#### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	-	-	-	60°F (15.5°C)	1	2	60

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

# **Plumbing Requirements**

JNN

#### **CAD** Drawings


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
30-90	207-621	3/8" Male Flare Fitting	0.94	•		


MARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

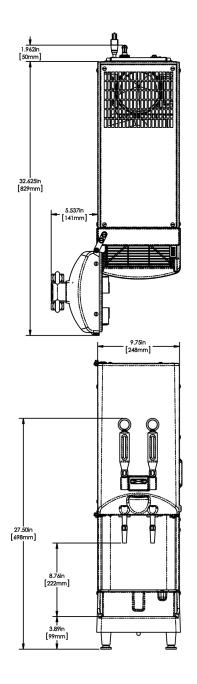

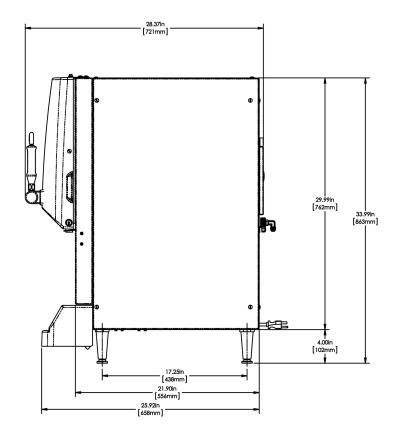

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	34.0 in.	9.8	29.8 in.	43.7 in.	22.8	30.5 in.	118.120 lbs	17.543 ft <sup>3</sup>
Metric	86.4 cm	24.9	75.7 cm	111.0 cm	57.8	77.5 cm	53.579 kgs	0.497 m³




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 11/18/2019

 For most current specifications and other info visit bunn.com.
 11/18/2019

### Related Products & Accessories:NITRON® Cold Draft Countertop 4:1 - 12:1(51600.0016)

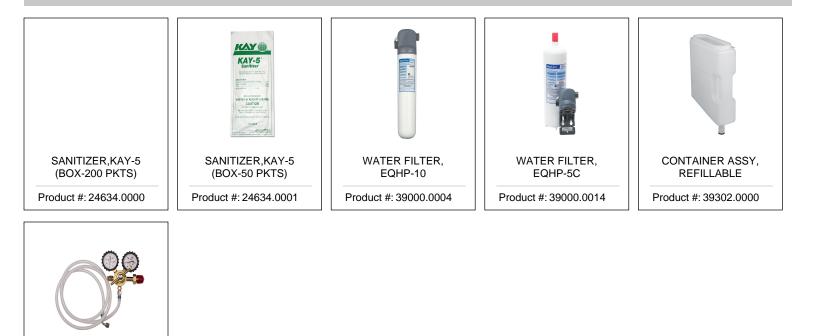

KIT, PRIMARY N2 REGULATOR Product #: 54060.0000



\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 11/18/2019

 For most current specifications and other info visit bunn.com.
 11/18/2019