# NITRON® Cold Draft SCH/ASTRA RDG & NGM

Height: 34.0" Width: 9.8" Depth: 29.8" (86.4cm) (24.9cm) (75.7cm)



- Includes Gas Module specifically designed for Nitron Cold Draft dispensers, eliminating the need for other external gas sources
- 11" x 6.5" graphic panel on the LED-lighted door can easily be changed without tools- to promote unique brands or beverage offerings
- Serve two different coffees or teas, one Nitro and one Still, using two 1/2-gallon concentrate Scholle BIBs
- Patented BUNN gas infusion technology can produce up to 3 minutes of cascading micro-bubbles
- Patented High Intensity® mixing chamber assures a perfectly blended finished beverage, from cup to cup
- Mounted on standard 3/8"-16 UNC threads, chrome plated brass tap handles are interchangeable with custom handles for a more personalized look
- Automatic water bath fill maintains water bath level for optimal cold beverage capacity
- At a rate of one 16oz drink per minute, can dispense 60 drinks before exceeding 41°F (using 75°F incoming water)
- Refrigerated product cabinet protects flavor integrity and product life
- Large dispense area accommodates taller cups and carafes up to 8.76"
- Service-friendly design makes set-up and maintenance simple

#### Agency:



**Additional Features** 

### Specifications

Product #: 51600.0029

Flavors: 2 Flavors

Product Ratio: 4:1-12:1

Connector: Scholle

Water Access: Plumbed Finish: Black Door: Lit Refrigerant: R-134A

#### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

## **Plumbing Requirements**

#### **CAD** Drawings

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
30-90	207-621	3/8" Male Flare Fitting	0.94	•		


MARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



nent. 05/04/2021

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

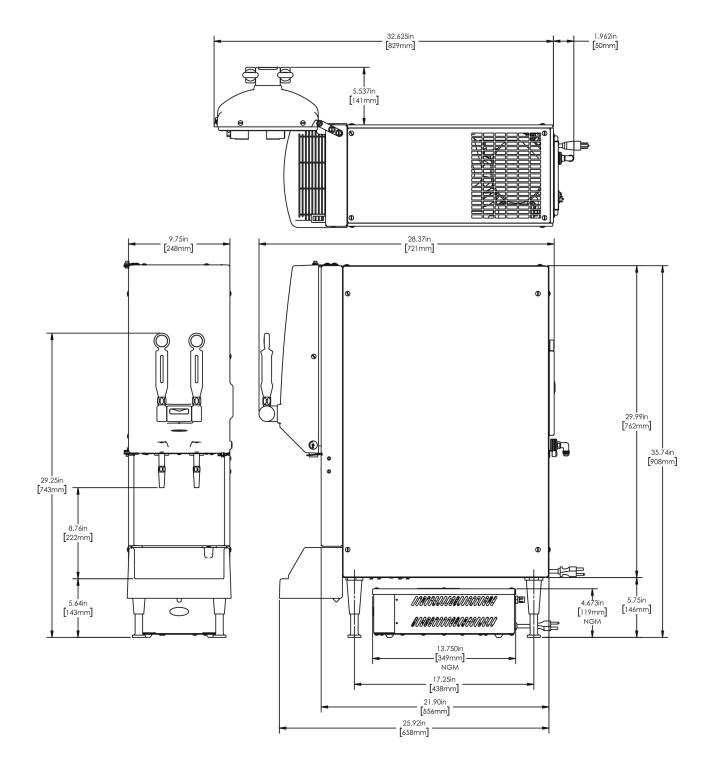

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	34.0 in.	9.8 in.	29.8 in.	43.7 in.	22.8 in.	30.5 in.	135.210 lbs	17.543 ft <sup>3</sup>	
Metric	86.4 cm	24.9 cm	75.7 cm	111.0 cm	57.8 cm	77.5 cm	61.331 kgs	0.497 m³	




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last U

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
05/04,

For most current specifications and other info visit bunn.com.
Control of the second s

Last Updated: 05/04/2021

# Related Products & Accessories: NITRON® Cold Draft SCH/ASTRA RDG & NGM (51600.0029)

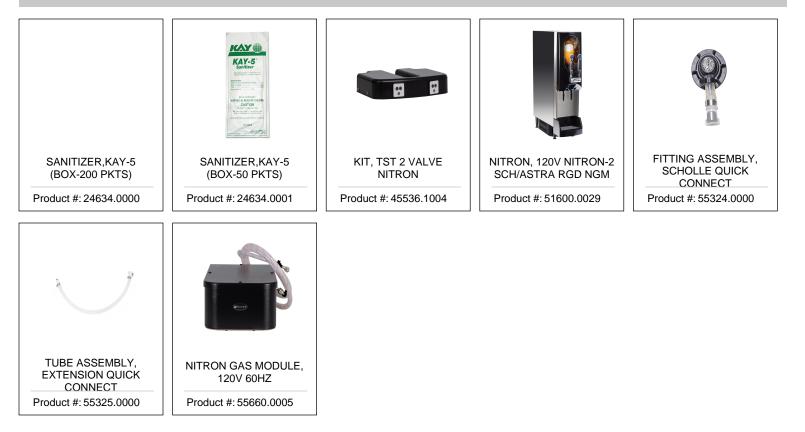



\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 05/04/2021 For most current specifications and other info visit bunn.com.