FAST CUP, 208-240V 60HZ W/ BUNNLINK LTE

Height: 33.5" Width: 16.8" Depth: 24.4" (85.1cm) (42.7cm) (62.0cm)



- BUNNlink secure, remote machine monitoring solution provides you with peace of mind and will automate Customer Care messages, letting you know when to refill hoppers or empty the waste bin
- VirtualTOUCH Clean Contact solution providing your customers hands-free dispensing by capturing the on-screen QR code with their smart device
- Freshly ground and hot brewed coffee, one fast, excellent cup at a time
- Expand your menu with a refreshing selection that is ready to be iced
- Large full color 10" touchscreen creates an easy to follow experience for every user
- Promote your brand by uploading your own graphics and videos
- Simple navigation screens such as Picture Prompted Cleaning makes routine care
 of the Fast Cup a snap for your staff
- Practically no coffee waste the Fast Cup bean to cup system delivers individual cups of fresh coffee. What they want / when they want it.
- Automated grinding, brewing and managing spent grounds frees up your staff to spend time with your customers

Agency:





Specifications

Product #: 55400.0104 **Hopper Capacity:** 3.00 lbs (1.361 kgs)

Water Access: Plumbed Dispense: Portion Control
Finish: Stainless/Black Legs: 4" Satin Nickel Legs

Hoppers: Three

Additional Features

Hot Water Button

Electrical & Capacity

208-240	24.0	5200	Attached Yes	NEMA L6-30P	236ml cups/hr 63	Temp. 60°F (15.5°C)	1	plus Ground	60	
Volts*	Amps	Watts	Cord	Plug Type	8oz cups/hr	Input H ² O	Phase		Hertz	

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00


CAD Drawings


2D	Revit	KLC
•		

MARNING:







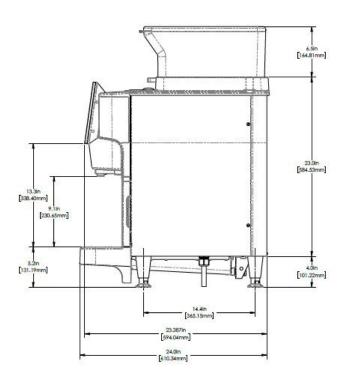

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	33.5 in.	16.8 in.	24.4 in.	49.8 in.	27.5 in.	23.5 in.	181.000 lbs	18.606 ft ³
Metric	85.1 cm	42.7 cm	62.0 cm	126.4 cm	69.9 cm	59.7 cm	82.102 kgs	0.527 m³




Related Products & Accessories: FAST CUP, 208-240V 60HZ W/ BUNNLINK LTE (55400.0104)













Serving & Holding Options: FAST CUP, 208-240V 60HZ W/ BUNNLINK LTE(55400.0104)
--

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

