## WEQ-35(3).2L

Height: 16.98" Width: 6.12" Depth: 5.54" (43.1cm) (15.5cm) (14.1cm)



- Designed for medium volume applications using a unique blend of catalytic coconut shell carbon rated to reduce chlorine taste and odor for consistent, great tasting cold and hot beverages, hot water, and ice
- Protects downstream equipment with exceptional sediment holding capacity and reduces health contaminants such as cyst with 0.2 Microns mechanical filtration
- Save on maintenance and service costs with a scale control blend that's up to 8 times more scale control capacity, specifically engineered to match the entire chlorine capacity life resulting in reduced scale build-up on evaporator plates and heating coils in both ice machines and coffee brewers
- Certified to NSF Standard 53 for Cyst and Standard 42 for Sediment, Chlorine Taste and Odor reduction
- Sanitary quick connect valve-in-head design simultaneously shuts off and vents water with ¼ turn, allowing for simple cartridge change-outs and maintenance times
- Unique modular filter head manifold design allows for simple installation, customization, and future system expansion
- Auto-leveling technology ensures perfect installation every time
- Includes single stage filter head assembly with manifold bracket, 3/8" MNPT fittings and 1/4" quick-connect rinse valve

NOTE: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

## Specifications Product #: 56000.0034 Cartridge Type: Quick Change Application(s): Tea, Ice, Coffee, Backroom Package/Combo System Replacement Cartridge: 56000.0126 Filtration Type: Sediment, Lime Inhibitor, Cyst Reduction, Chlorine Taste & Odor Filter Change Frequency: Annual Capacity Capacity

| Micron Rating | Service Flow Rate        | Water Filter Capacity<br>Chlorine Reduction | Water Filter Capacity<br>Chloramine Reduction | Water Filter Capacity<br>Softening |
|---------------|--------------------------|---|---|------------------------------------|
| 0.2           | 3.0 gal/min (11.4 L/min) | 35000 gal. (132487.0 L)                     | -   | -                                  |

## **Plumbing Requirements**

| Inlet Connection Outlet C |        | Outlet Connection | Min Operating<br>Pressure | Max Operating<br>Pressure | Min Operating<br>Temperature | Max Operating<br>Temperature |  |
|---------------------------|--------|-------------------|---------------------------|---------------------------|------------------------------|------------------------------|--|
|                           | 3/8 IN | 3/8 IN            | 20 psi (138 kPa)          | 125 psi (862 kPa)         | 40°F(4°C)                    | 100°F(38°C)                  |  |


MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 01/26/2022


the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

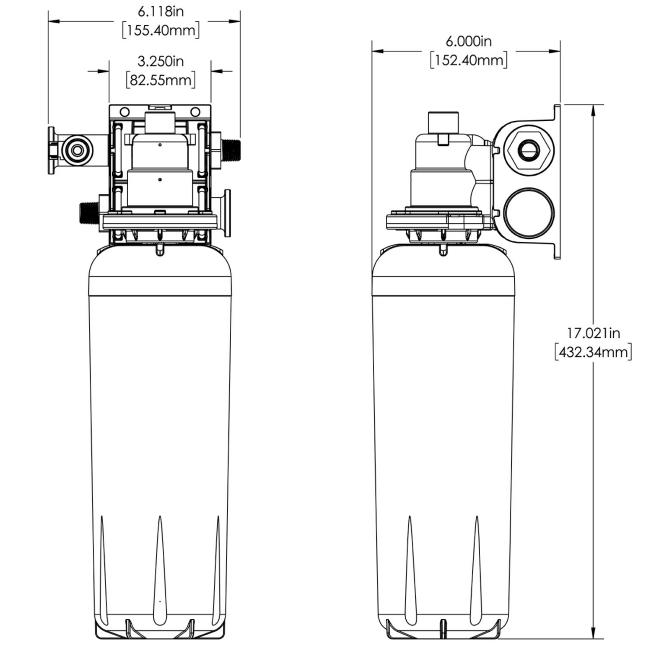

| Dimensions of Filter System<br>(filter head with filter cartridge) |           |          |          | Installed Dimensions<br>(Installation with wall mounting) |       |       | Cartridge Dimensions<br>(filter cartridge only) |          |          |
|--|-----------|----------|----------|---|-------|-------|---|----------|----------|
|  | Height    | Width    | Depth    | Height  | Width | Depth | Height  | Width    | Depth    |
| English  | 16.98 in. | 6.12 in. | 5.54 in. | -   | -     | -     | 14.49 in.                                       | 4.53 in. | 4.53 in. |
| Metric   | 43.1 cm   | 15.5 cm  | 14.1 cm  | -   | -     | -     | 36.8 cm   | 11.5 cm  | 11.5 cm  |

|         | Weight  |         | Shipping |           |           |           |        |  |
|---------|---------|---------|----------|-----------|-----------|-----------|--------|--|
|         | Dry     | Wet     | Height   | Width     | Depth     | Weight    | Volume |  |
| English | 0.0 lbs | 0.0 lbs | 8.00 in. | 15.00 in. | 20.00 in. | 6.920 lbs | -      |  |
| Metric  | -       | -       | 20.3 cm  | 38.1 cm   | 50.8 cm   | 3.139 kgs | -      |  |

WARRANTY: BUNN High Performance Water Filtration Solutions Systems by BUNN® (excluding water filters and water treatment replacement cartridges) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase, under normal use and service, and when installed in accordance with manufacturer's recommendations outlined in the filtration systems owner's manual. BUNN replaceable elements (water treatment cartridges, filter elements, and feeder elements) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase or the remainder of the original warranty, whichever is longer. See printed warranty for full details. BUNN will provide a copy of the warranty upon request.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 01/26/2022

For most current specifications and other info visit bunn.com.

## Related Products & Accessories: WEQ-35(3).2L(56000.0034)





 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 01/26/2022

 For most current specifications and other info visit bunn.com.
 01/26/2022

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 01/26/2022

 For most current specifications and other info visit bunn.com.
 01/26/2022