ULTRA NX, 120V BLK

Height: 32.4" Width: 16.6" Depth: 26.4" (82.3cm) (42.2cm) (67.1cm)



- Patented beverage monitoring technology and reversing auger design ensure consistent, great tasting frozen beverages
- Enhanced auger drive system and seal design for long-lasting, reliable performance
- New leak capture feature helps reduce service costs and clean-up time
- BUNNlink compatible
- Two large product hoppers hold 3 gallons (11.4L) each to maximize serving capacity
- User interface communicates need for cleaning and maintenance
- LED lighted merchandisers in hopper lids bring high visibility to front- of-house applications
- Low-product alert to minimize product outages
- Quick defrost feature to ensure beverage quality and maximize uptime
- Slide in hopper graphics allow quick and easy changes
- USB for easy software updates and downloads
- Optional faucet available for dispensing chilled (non-frozen) products
- Sanitation listings NSF 18 and NSF 6 (Dairy)
- R290 all-natural refrigerant provides a sustainable platform with extremely low Global Warming Potential

Additional Features

Agency:

Specifications

Product #: 58000.0010

Autofill: None

0.51

Flavors: 2 Flavors

Finish: Black

Hoppers: Two

Refrigerant: R290

Dispense: Pull & Hold

Handle: Extended Handle

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	Plug Type 8oz cups/hr 236ml cups/hr		Phase	# Wires plus Ground	Hertz
-	-	-	-	-	-	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


	<u> </u>					
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
-	-	-	-			


CAD Drawings


2D	Revit	KLC
•		


MARNING:







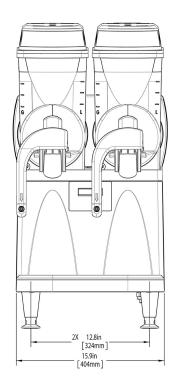

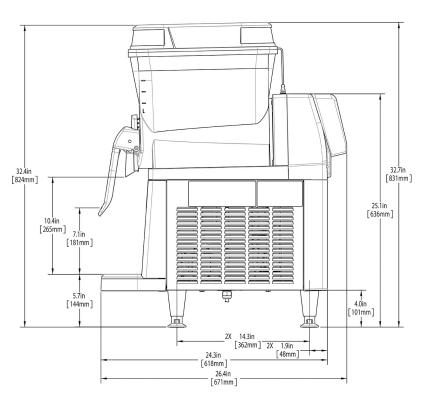

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	32.4 in.	16.6 in.	26.4 in.	43.9 in.	20.5 in.	25.9 in.	110.000 lbs	13.468 ft ³
Metric	82.3 cm	42.2 cm	67.1 cm	111.4 cm	52.1 cm	65.7 cm	49.896 kgs	0.381 m³



Related Products & Accessories: ULTRA NX, 120V BLK(58000.0010) | KIT, HDL LOCK ULTRA-2 | KIT, LID LOCK ULTRA NX BLACK | DRIP TRAY COVER, ULTRA NX BLK | DRIP TRAY COVER, ULTRA NX - BLK | DRIP TRAY COVER, ULTRA



Serving & Holding Options: ULTRA NX, 120V BLK(58000.0010) *Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.*

