DUAL GPR 120/240V w/SST Fnl, 3 Settings

29.3" x 19.3" x 18.0" (74.4cm x 49.0cm x 45.7cm)



- Each 1.5GPR portable server (included) has a Safety-Fresh® brew-through lid with vapor seal and spill protection
- Adjustable bypass ensures perfect coffee regardless of batch size
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- SplashGard® funnels deflect hot liquids away from the hand
- · Servers not included unless otherwise noted

Agency:





Specifications

Product #: 20900.0011 Faucet: Upper

Water Access: Plumbed

Interface: Cabled Finish: Stainless

Funnel: Stainless Steel

Additional Features

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	28.7	6890	No	-	309	60°F (15.5°C)	1	3	60

Plumbing Requirements

i idiiiidiiig i toqdii oiiid							
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	1/4" Male Flare Fitting	-				

CAD Drawings


2D	Revit	KLC
•		


Created on:

07/23/2019



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

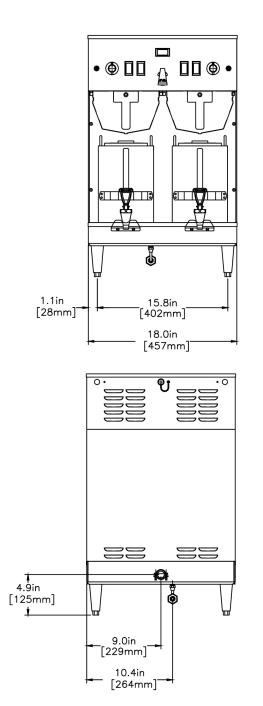

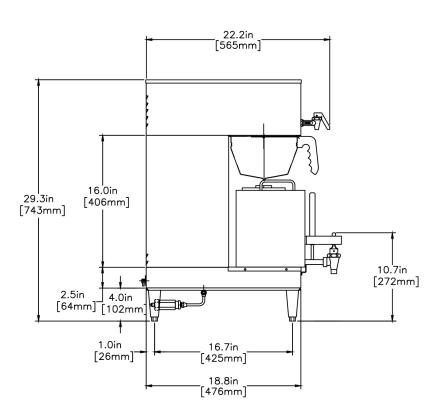

Unit				Shipping				
	Width	Height	Depth	Width	Height	Depth	Weight	Volume
English	18.0 in.	29.3 in.	19.3 in.	20.8 in.	31.8 in.	29.0 in.	95.350 lbs	11.101 ft³
Metric	45.7 cm	74.4 cm	49.0 cm	52.8 cm	80.8 cm	73.7 cm	43.251 kgs	0.314 m³




Related Products & Accessories: DUAL GPR 120/240V w/SST FnI, 3 Settings(20900.0011)











Serving & Holding Options: DUAL GPR 120/240V w/SST Fnl, 3 Settings(20900.0011)







