

REACH IN FREEZER

D28F-GS1

Bottom Mounted / Glass Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency

115V/60Hz

Refrigerant

R290

Type of Defrost

Automatic

Interial Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

 $0 \sim -8$ °F

Compressor Power (HP)

1/2

Nema Config.

NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
- 忆 Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com

DETAILS & SPECIFICATIONS

D28F-GS1

Front View

27 1/2" Side View

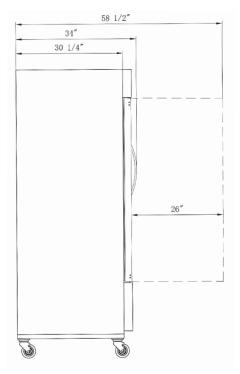

MODEL D28F-GS1

Rated Voltage Rated Frequency 60Hz **Total Input Power** 550W **Total Current** 5.3A 8.1kW.h/24h **Energy Consumption** 17.79 cu ft **Total Capacity Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG Insulation Blowing Gas C-Pentane** R290/4.41oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D28F-GS1	27 1/2 x 34 x 80 3/8	29 1/8 x 36 5/8 x 84 3/8	308 lbs	4	39















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com www.DukersUSA.com