



REACH IN FREEZER

D28F

Bottom Mounted / Solid Door





1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config. NEMA5-15P



PRODUCT FEATURES

- Reversible Doors
- The compressor is mounted in the bottom for better heat evaporation.
- B.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D28F

Front View

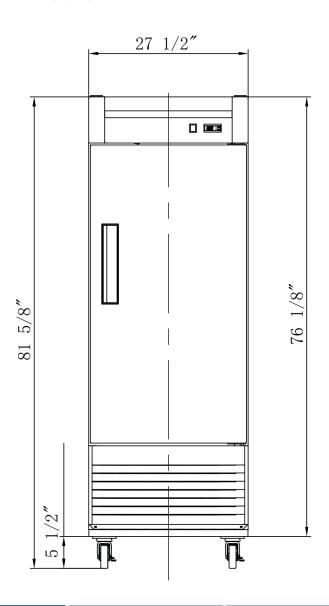

Side View



MODEL D28F	R
Rated Voltage Rated Frequency Total Input Power Total Current Total Capacity	115V 60Hz 750W 9.5A 17.79 cu ft
Climatic Category Protection Type Design Pressure High Side Design Pressure Low Side	4-5 I 300 PSIG 150 PSIG
Insulation Blowing Gas Refrigerant	C-Pentane R290/4.41 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D28F	27 1/2 x 32 5/8 x 80 3/8	29 1/8 x 34 1/4 x 84 3/8	287 lbs	4	39















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com

www.DukersUSA.com