

Bottom Mounted / 2-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material Stainless Steel** Temperature Range °F 0 ~ -8°F Compressor Power (HP) 3/4 Nema Config. NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ※ Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
- Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com

DETAILS & SPECIFICATIONS

D55F

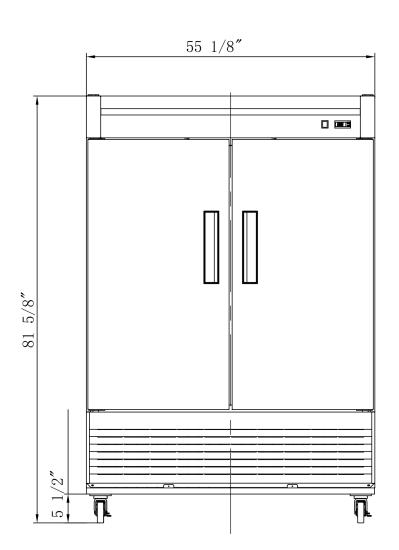

Side View



MODEL D55			
Rated Voltage	115V		
Rated Frequency	60Hz		
Total Input Power	1250W		
Total Current	11.8 A		
Total Capacity	40.74 cu ft		
Climatic Category	4-5		
Protection Type	1		
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/5.11 oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D55F	55 1/8 x 32 5/8 x 81 5/8	56 3/4 x 34 1/4 x 84 3/8	463 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com