



D83AF

Top Mounted / 3-Solid Door



## 1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F 0 ~ -8°F
Compressor Power (HP) 1/2 + 1/2
Nema Config. NEMA5-20P



## **PRODUCT FEATURES**

EARS PARTS & LA

**PREMIUM** 

SHEAR COMPRES

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey


1-800-931-8628

info@dukersusa.com

www.DukersUSA.com


## **DETAILS & SPECIFICATIONS**

D83AF

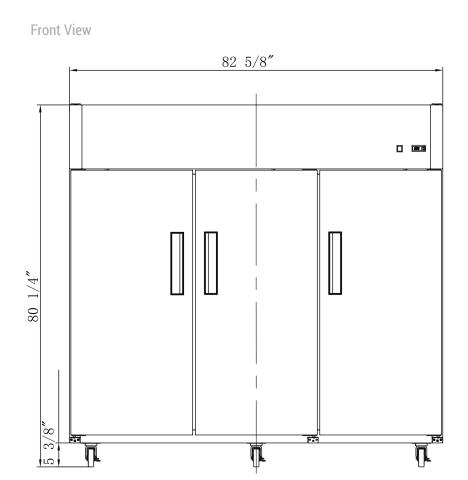

34 1/4"

Side View



## **MODEL D83AF**

Rated Voltage Rated Frequency **Total Input Power Total Current Total Capacity Climatic Category Protection Type** Design Pressure High Side **Design Pressure Low Side Insulation Blowing Gas** Refrigerant

115V
60Hz
1300W
16A
65.98cu ft
4-5
1
300 PSIG
150 PSIG
C-Pentane
R290/4.2+4.2 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D83AF	82 5/8 x 34 1/6 x 80 3/8	84 1/4 x 35 3/8 x 84 3/4	595 lbs	12	13

















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com

www.DukersUSA.com