

REACH IN DUAL (Refrigerator and Freezer) **D83RF**

Bottom Mounted / 3-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F Freezer: 0 ~ -8°F Refrigerator: 33 ~ 41°F

Compressor Power (HP) 1/4 + 1/2 Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * One section freezer, two section refrigerator Freezer: 0 ~ -8°F, Refrigerator: 33 ~ 41°F
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D83RF

Front View

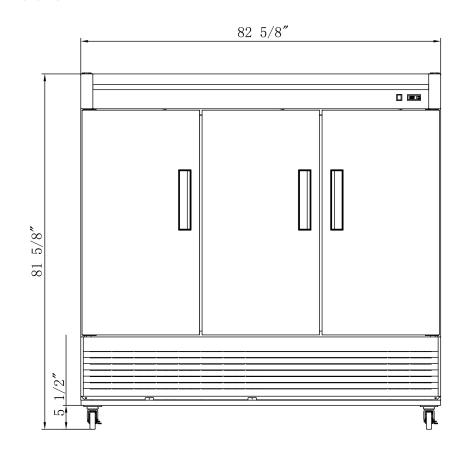

Side View



MODEL D83RF

Rated Voltage Rated Frequency 60Hz 500W + 800W **Total Input Power Total Current** 5A + 9A**Total Capacity** 41.9 + 19.24 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG** 150 PSIG **Design Pressure Low Side Insulation Blowing Gas** C-Pentane R290/4.23 + 3.7 oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D83RF	82 5/8 x 32 5/8 x 83 5/8	84 1/4 x 34 1/4 x 84 3/8	700 lbs	12	13















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com