

UNDERCOUNTER FREEZER **MODEL DUC29F**

Single Door





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material** Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1/4+ Nema Config. NEMA5-15P

DUKERS

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

PRODUCT FEATURES

The compressor is mounted in the back and \bigcirc placed in the coolest possible area; this makes it easily accessible for servicing.

Duke

RS PARTS &

PREMIUM WARRAN

S FEAR COMPRE


- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ☆ Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- M Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕮 Lifetime warranty on hinges.
- \mathcal{T} 6" casters with lock for easy mobility.

HIGH QUALITY **?**-**STAINLESS STEEL & ROBUST DESIGN**

> (1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER DUC29F

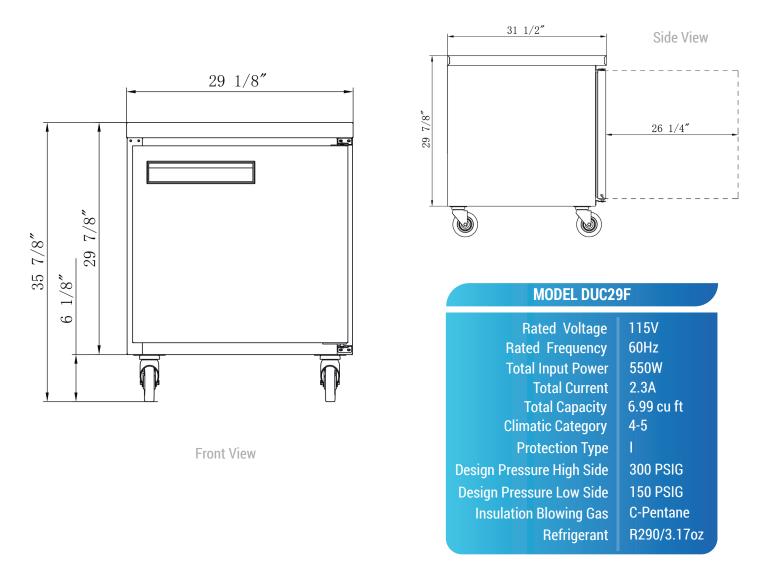

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DUC29F	29 1/8 x 31 1/2 x 36	30 1/2 x 33 1/8 x 39 3/8	158 lbs	1	60
Interces State Section					

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628
info@dukersusa.com
w w w. D u k ers U S A.com