


# lamber

## **P700EKDPS** **POT WASHER**

- Soft-Touch Electronic Control Panel with Digital Thermostats
- Counterbalanced Double-Wall Door
- Stainless Steel Upper and Lower Wash and Rinse Arms
- 2 Integral tank filters
- Self-washing Slanted Tank with Rounded Edges
- Double Wall Thermal and Acoustic Insulation
- Stainless Steel Washing Pump
- Automatic tank loading
- Frontal control panel for easy maintenance
- Security Thermostat



<b>POWER</b>	208V 3PH (Hardwire), 10500W, 28A
<b>RINSE-AID DISPENSER</b>	Yes
<b>DRAIN PUMP</b>	30W
<b>CLEARANCE</b>	25.2"
<b>RACK CAPACITY (L X W)</b>	25.2" x 26.4"
<b>INCLUDED RACKS</b>	1 x Stainless Steel basket, 1 x Stainless Steel baking pan insert
<b>WORK HEIGHT</b>	33"
<b>TANK CAPACITY</b>	61L / 16Gal
<b>DIMENSIONS (L X W X H)</b>	31.7" x 33.25" x 70.3"
<b>WASH CYCLE DURATION</b>	2 - 3 - 4 mins
<b>WASH CYCLE CAPACITY</b>	30 - 20 - 15 baskets/hr
<b>WATER CONSUMPTION</b>	2.8L per cycle / 0.7Gal per cycle 84 - 56 - 42L per hour / 22 - 14.8 - 11Gal per hour
<b>ELECTRIC PUMP</b>	1500W
<b>WASH TANK ELEMENT</b>	9000W
<b>RINSE TANK ELEMENT</b>	9000W
<b>BOILER CAPACITY</b>	8L / 2Gal
<b>WATER INLET TEMPERATURE</b>	55 - 60°C 131 - 140°F
<b>WATER INLET CONNECTION</b>	3/4"
<b>WATER OUTLET CONNECTION</b>	3/4"
<b>INLET WATER PRESSURE</b>	20 ± 5 psi
<b>WATER HARDNESS</b>	5 - 10°f
<b>RINSE TEMPERATURE</b>	82 - 90°C 175 - 194°F
<b>NET WEIGHT</b>	353 lbs
<b>SHIP DIMENSIONS (L X W X H)</b>	38.6" x 32.7" x 86.7"
<b>SHIP WEIGHT</b>	375 lbs
<b>NOISE LEVEL</b>	<70dB(A)

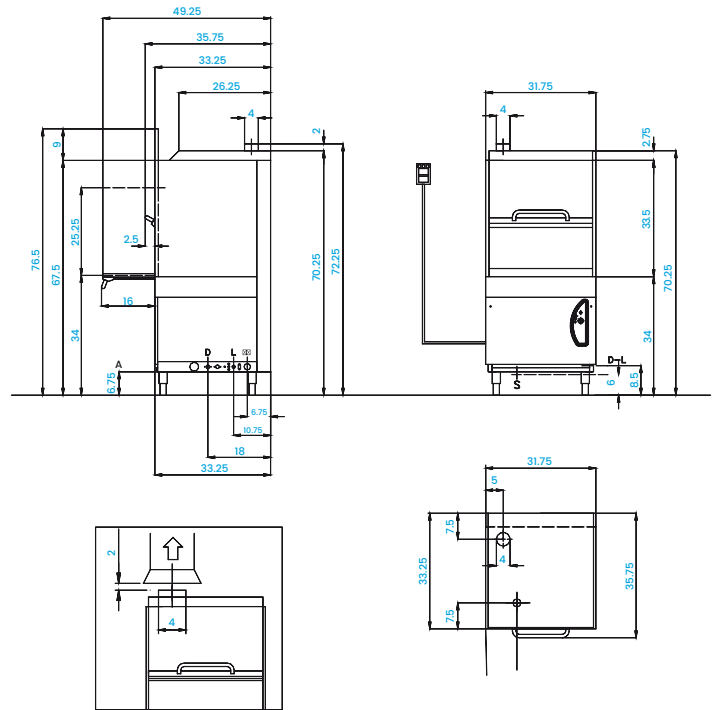

<b>D</b>	Hot Water Inlet
<b>S1</b>	Water outlet for drain pump
<b>L</b>	Electrical Connection
<b>A</b>	Max. Drain Height to Wall

**WARRANTY: ONE YEAR PARTS AND LABOR**

