


# SAP 015 R

|   |  |  |
|---|--|--|
| <b>MODEL</b><br><b>SPIDOGLOSS SAP015R ECO</b> | <ul style="list-style-type: none"> <li>• <b>Black ribbed surfaces</b></li> </ul> | <ul style="list-style-type: none"> <li>• <b>Max. temperature 752 °F</b></li> </ul> |
|   | <ul style="list-style-type: none"> <li>• <b>Manual Control</b></li> </ul>        | <ul style="list-style-type: none"> <li>• <b>Glass ceramic</b></li> </ul>           |



**DESCRIPTION**

Professional Contact Cooking System with Glass Ceramic plates, suitable for cooking a wide array of different foods, as such: toast, sandwich, meat, fish, vegetables, eggs, etc. High quality cooking result thanks to heat distribution uniformity and use of shock resistance, non-stick, non-porous and impermeable to smells and tastes Glass Ceramic Cooking Surfaces.

High versatility of use thanks to **SHB™ Plus** technology which allows combined heating (contact + infrared) and high cooking Temperature setting.

Up to 60% saving in Preheating Time thanks to **SHB™ Plus**. Up to 60% saving in Energy consumption thanks to the **Protek.Safe™** high efficiency insulation system which eliminates unnecessary energy loss.

**STANDARD COOKING FEATURES**

**SETTINGS:**


- Manual Control
- Temperature set: 248 °F – 752 °F.

**STANDARD TECHNICAL FEATURES**

- **Single Black Ribbed Glass Ceramic cooking plate:**  
n°1 15 3/4"x11 13/16" in
- Stainless Steel Case
- Ergonomic Handle
- Self-locking Handle Bracket
- 4 Non-Slip Feets
- Removable Dip Tray
- ON/OFF button and LED light


**ACCESSORIES**

- **METAL SCRAPER**  
Metallic scraper for Glass Ceramic Surfaces (included)
- **SPIDO CLEAN SPRAY DETERGENT**  
750 ml Spray Detergent for Glass Ceramic and Steel Surfaces (to be purchased separately)



# SAP 015 R

Views  
Connection positions  
Dimensions and Weights  
Installation requirements  
Power supply

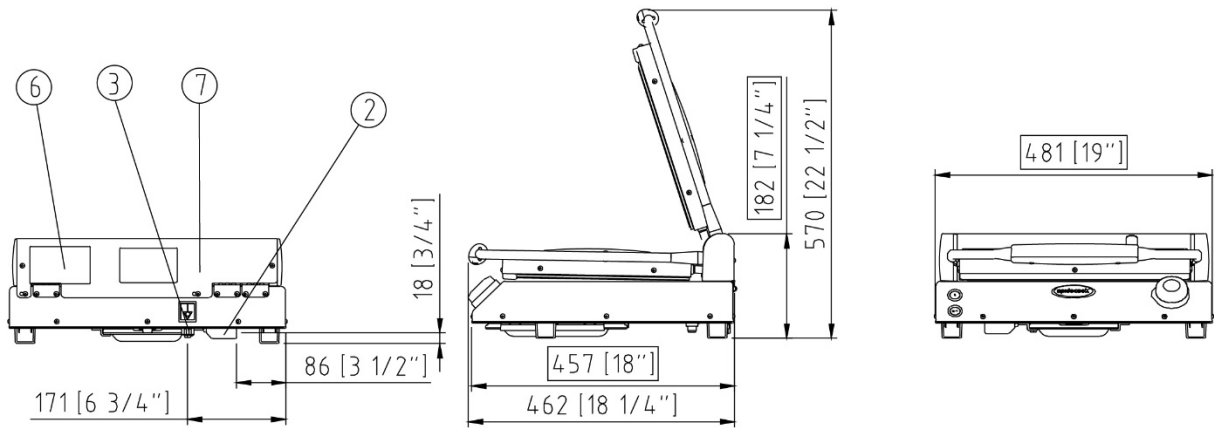

### CONNECTION POSITIONS

|   |                             |
|---|-----------------------------|
| 2 | Terminal board power supply |
| 3 | Unipotential terminal       |
| 6 | Technical data plate        |
| 7 | Safety thermostat           |

### DIMENSIONS AND WEIGHT

|            |         |
|------------|---------|
| Width      | 19"     |
| Depth      | 18 1/4" |
| Height     | 7 1/4"  |
| Net Weight | 32,8 lb |

### INSTALLATION REQUIREMENTS

Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.


### POWER SUPPLY

|                         | STANDARD          |
|-------------------------|-------------------|
| Voltage                 | 120 V             |
| Phase                   | 1PH+N+PE          |
| Frequency               | 60 Hz             |
| Power                   | 1.8 kW            |
| Maximum Amp Draw        | 15 A              |
| Power cable requirement | SJTO<br>3 x AWG14 |
| Plug                    | NEMA 5-20P        |

# SAP 015 R

Wiring diagrams

SAP 015 R

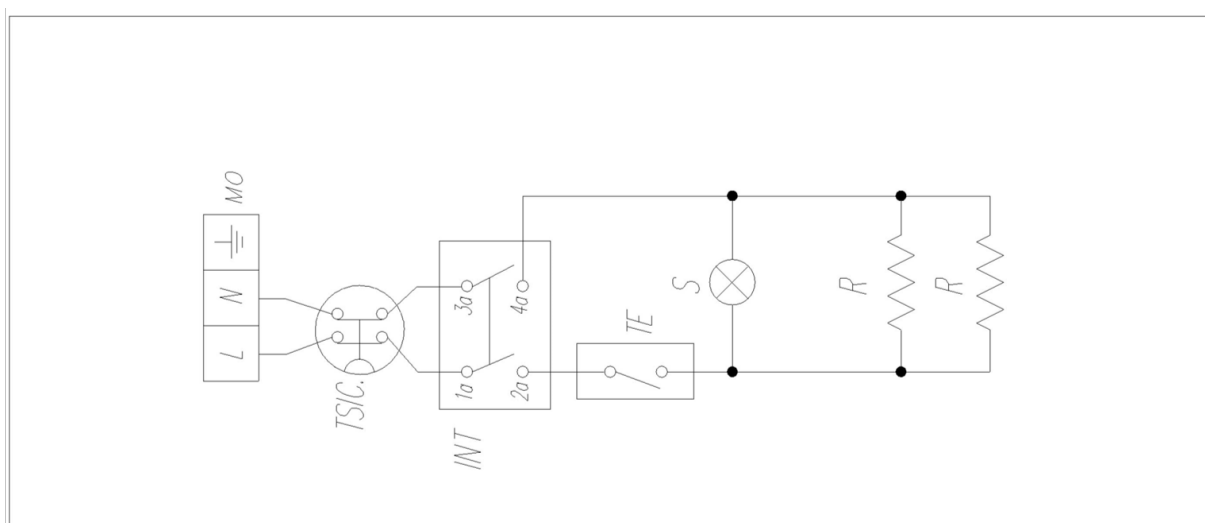

## WIRING DIAGRAMS

|     |                   |
|-----|-------------------|
| INT | Switch            |
| MO  | Terminal board    |
| R   | Heating element   |
| S   | Pilot light       |
| TE  | Thermostat        |
| TS  | Safety thermostat |