HOT WATER DISPENSER

HWB Series

HWB-15

15 Gallon



The HWB-15 15 gallon hot water dispenser is the ideal size for medium-to-heavy duty food/beverage prep and cleaning tasks. Set the thermostat at the desired temperature for consistent and precise hot water dispensing for a variety of foods such as gravy, oatmeal, mashed potatoes, cheese sauce, gelatins & much more.



The green "Ready Light" indicator illuminates when hot water is ready to dispense at your preprogrammed temperature.



Protective faucet guard provides an additional level of sanitation by reducing cross-contamination from various sized containers.



The interior top and sides of the unit are fully insulated to maximize heat retention and improve efficiency.



Technical Specifications

Water Specification

| Water Inlet | Minimum Flow Rate | Water Pressure | 3% gpm [2.8 lpm] | 20-75 psig [137-517 kPa]

Electrical Configuration


Configuration Code	Heater	Voltage	Phase	Wires	KW	Electrical	Max Amp	Gallon[Liter]/Hour
	Configuration					Connection	Draw	
US & CANADA								
H15011	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	11.0-15.0 [41.6-56.7] ⁽¹⁾
H15021 ⁽²⁾	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.4-22.4	17.0-22.0 [64.3-83.2] ⁽¹⁾
EXPORT								
H15041 ⁽²⁾	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	15.0-19.0 [56.7-71.9] ⁽¹⁾

⁽¹⁾ Based on standard factory settings: 200°F water.


Measurements

 Height
 Width
 Depth
 Empty Weight
 Filled Weight
 Shipping Weight
 Shipping Dimensions:

 29%" [75.2 cm]
 20%" [51.1 cm]
 27¾" [70.4 cm]
 70 lbs [31.7 kg]
 105 lbs [47.6 kg]
 33" x 24" x 28" [84 x 61 x 71 cm]

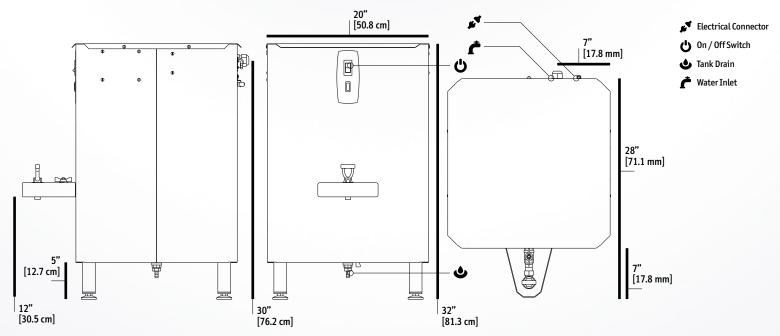





8oz. 356 12oz. 237 16oz. 178 20oz. 142 2

* Approximate based on maximum power setting.



fetco.com 800.338.2699 USA 847.719.3000

847.719.3001

Food Equipment Technologies Co. 600 Rose Road Lake Zurich, IL 60047 USA



⁽²⁾ Requires 3 phase upcharge.