



# DCM-271BAK

## CUBELET ICE MACHINE AND WATER DISPENSER



DCM-271BAK  
08/13/25  
Item # 13549K

**W x D x H**  
**16<sup>5</sup>/<sub>8</sub>" x 24<sup>1</sup>/<sub>4</sub>" x 31<sup>3</sup>/<sub>4</sub>" \***  
\*including 4" legs



Lower buttons for easy  
wheelchair access



## Features

- ▶ LED touch buttons, upper and lower
- ▶ 10<sup>1</sup>/<sub>4</sub>" cup clearance
- ▶ Environmentally friendly R290 hydrocarbon refrigerant
- ▶ Quieter operation
- ▶ ADA Compliant



- Attractive modern design
- Easy to chew, Cubelet ice
- Up to 286 lbs. of ice production per 24 hours
- Built-in storage capacity of 0.3ft<sup>3</sup>/10 lbs.\*
- Durable stainless steel drain pan grate
- Easy-cleaning removable spout
- 2-second flush cycle every hour
- Advanced CleanCycle24™ design
- 6 ft. cord with a NEMA 5-15 plug



### Warranty:

3 Year Parts & Labor on entire machine.  
5 Year Parts on Compressor; air-cooled condenser coil.  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


\*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.

Shipping: (LxWxH) 20.88" x 30.63" X 36.25" Volume: 13.42ft<sup>3</sup>

| Condenser  | Model      | ICE PRODUCTION                                               |                                           | WATER USAGE                                 |                                       | ELECTRICAL                         |          |           |       | Heat Rejection<br>BTU/hr. | Refrigerant<br>Charge Amount | Net / Ship<br>Weight (lbs.) |
|------------|------------|--------------------------------------------------------------|-------------------------------------------|---------------------------------------------|---------------------------------------|------------------------------------|----------|-----------|-------|---------------------------|------------------------------|-----------------------------|
|            |            | Air / Water Temp<br>Lbs. per 24 hours<br>70°/ 50°F 90°/ 70°F | Potable<br>Gal. per 100 lbs.<br>90°/ 70°F | Condenser<br>Gal. per 100 lbs.<br>90°/ 70°F | kWh Used<br>per 100 lbs.<br>90°/ 70°F | Min. Circuit/<br>Max. Fuse<br>Size | Amperage | Voltage   |       |                           |                              |                             |
| Air-Cooled | DCM-271BAK | 286 211                                                      | 12.0                                      | N/A                                         | 5.3                                   | 15A                                | 6.4A     | 115V/60/1 | 3,500 | 5.3 oz                    | 136 / 154                    |                             |

Power cord included.

## Cubelet Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 108 - 127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Allow 6" (15cm) clearance at rear and sides for proper air circulation and ease of maintenance and/or service should they be required. Allow 24" (61 cm) clearance at top to allow for removal of auger.

Not intended for outdoor use - avoid placement in direct sunlight.

## Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- 3/4" MPT drain

## Water Filter

Please refer to water filter specification sheet for recommendations.

Hoshizaki reserves the right to change specifications without notice.





# DCM-271BAK



## CUBELET ICE MACHINE AND WATER DISPENSER

DCM-271BAK  
08/13/25  
Item # 13549K


FRONT VIEW

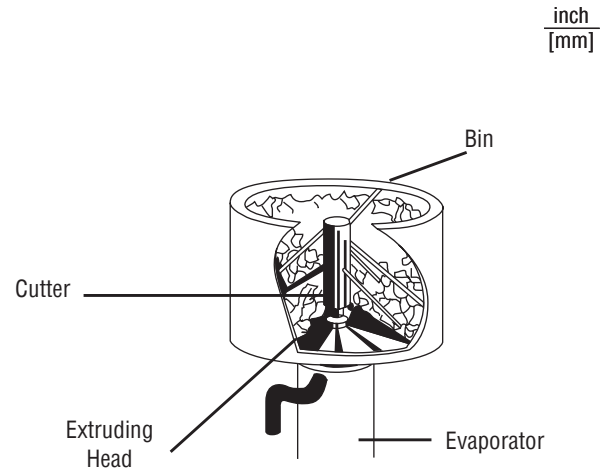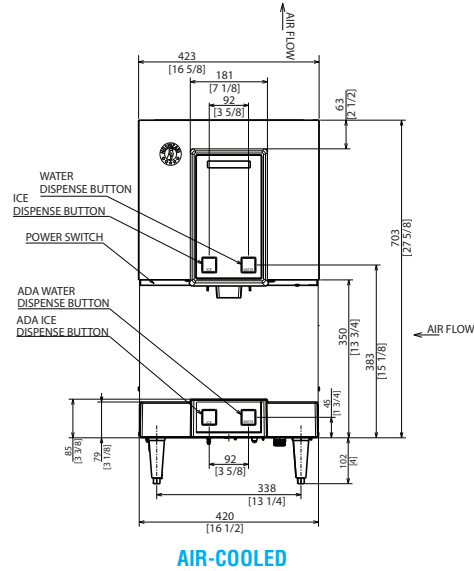

SIDE VIEW

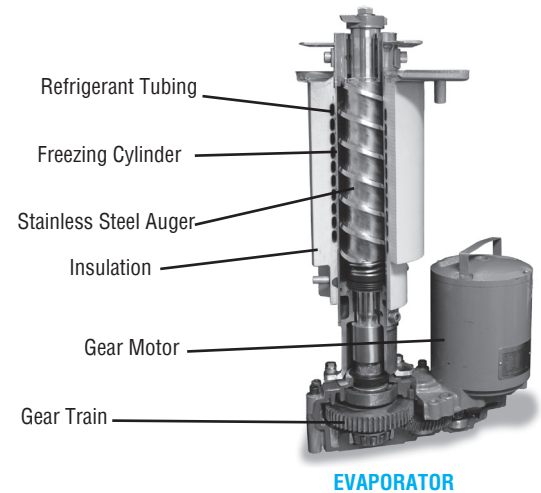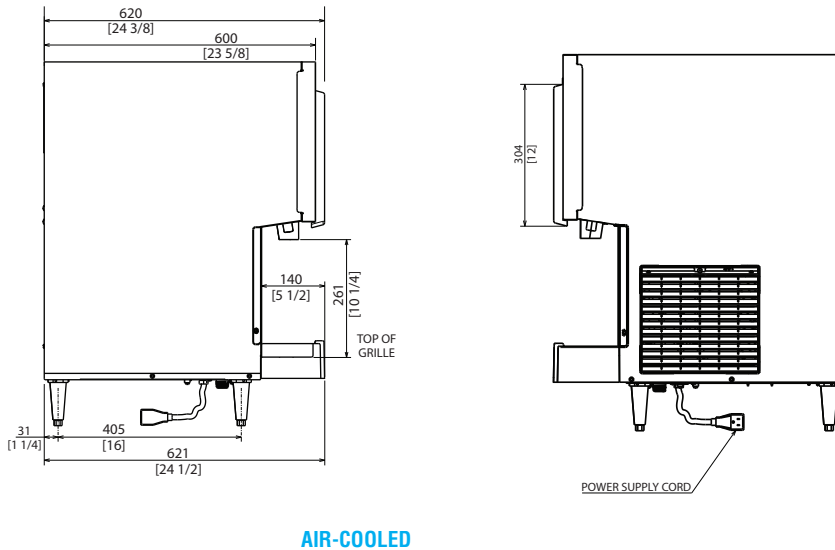

BOTTOM VIEW

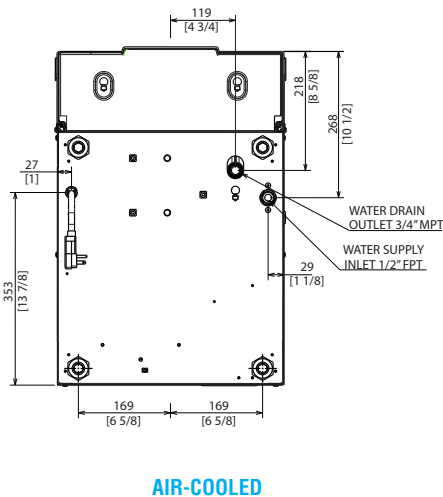

*NOTE: DCM-271BAK is made to pair with SD-271 stand. Placing a DCM-271BAK on SD-270 stand will require a new drain hole to be cut.*