

VRM

Self-Contained, Reach-In Bottom Mount, Medium Temperature Merchandisers

Advanced Design

- Contemporary styling places maximum attention on merchandising
- All VRM merchandisers have the same access panel design for commonality between merchandisers
- Self-closing Innovator doors. Positive seal, torsion type closure system
- Triple-pane thermal insulated glass door assemblies
- Magnetic door gaskets of one-piece construction, removable without tools for ease of cleaning
- Merchandiser can be placed against wall with 1-inch min. open space behind the back of the case - no air gap is required behind the case
- Digital display in center of case air grill

Merchandising with Style

- Doors and frames available in standard colors — black or gray
- Interior LED vertical lighting
- Illuminated Exterior Flat Sign Panel
- Improved visibility due to an additional 4" of glass for increased visibility inside the case
- Each door section includes 4 shelves and a merchandisable bottom rack; more shelves can be ordered as an option
- PTM is optional

Smart Construction

- Frame rail fitted with leg levelers
- Controller with communication ability via MODBUS
- Unit completely pre-wired at factory
- 115V/60Hz single phase, 15 amp dedicated outlet; cord and plug set included
- UL/ETL, NSF Type II and DOE 2017 certified

Innovative Refrigeration


- Environmentally-friendly R290 hydrocarbon refrigerant that has zero ozone depletion potential and 3 GWP (Global Warming Potential)
- High capacity, factory-balanced refrigeration system capable of maintaining medium temperature
- State-of-the-art evaporator and condenser fan motors providing more consistent volume of air which produces less heat, reduces energy consumption and provides greater reliability
- Bottom-mounted condensing unit positioned for easy maintenance
- Automatic defrost system time-initiated, temperature-terminated




For a matching side-by-side display of frozen products, be sure to see the companion VRL series of low temperature models.

Self-Contained, Reach-In Bottom Mount Glass Door Merchandisers for Medium Temperature Applications

- VRM1B** - Bottom Mount, Med Temp, 1-Glass Door Merchandiser
- VRM2B** - Bottom Mount, Med Temp, 2-Glass Door Merchandiser
- VRM3B** - Bottom Mount, Med Temp, 3-Glass Door Merchandiser

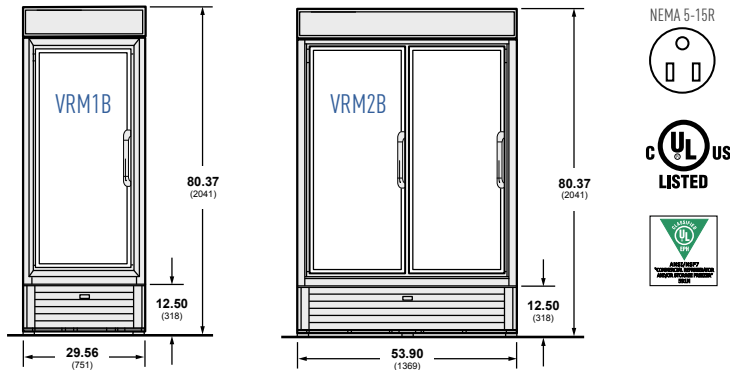


Increased interior dimensions for product visibility.

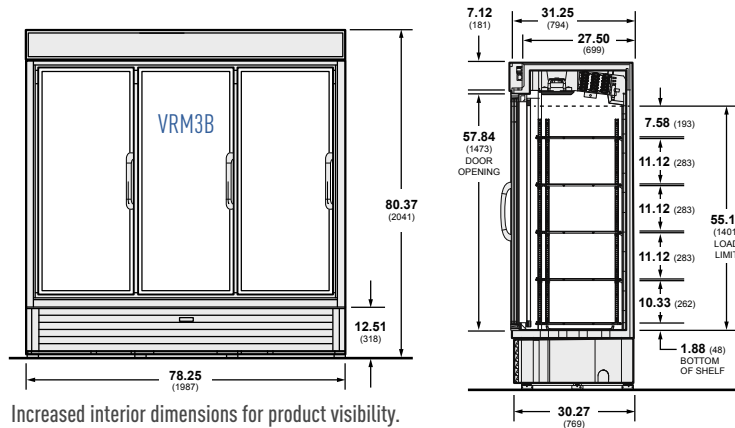

Increased interior dimensions for product visibility.

Plan Views

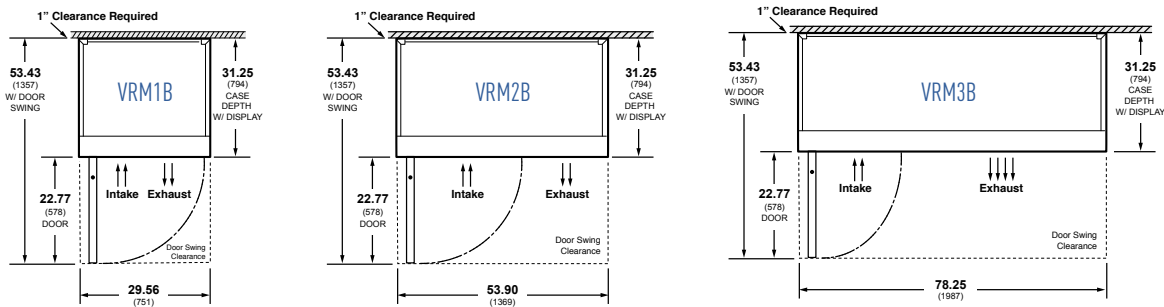

Specifications

| Model | Doors | Refrig. | Cu. Ft. Capacity | Interior Dimensions (Usable Inches ³) | | | Exterior Dimensions | | | * Depth dimension "D" excludes door handle. ** Overall height includes leveling pods. |
|-------|-------|---------|------------------|---|--------|--------|---------------------|--------|--------|--|
| | | | | L | D | H | L | D* | H** | |
| VRM1B | 1 | R-290 | 22.8 | 25.68" | 23.72" | 55.16" | 29.56" | 31.25" | 80.37" | |
| VRM2B | 2 | R-290 | 44.5 | 50.00" | 23.72" | 55.16" | 53.90" | 31.25" | 80.37" | |
| VRM3B | 3 | R-290 | 66.1 | 74.38" | 23.72" | 55.16" | 78.25" | 31.25" | 80.37" | |

Electrical

| Model | Nom. HP | Hz/Ph | Volts | Run Amps | Fuse Amps | NEMA Plugs | Refrig. Load (BTU/h) | A/C Load (BTU/h) | Energy Consumption (kWh/day) | Approx. Ship Wt. (lbs) |
|-------|---------|-------|-------|----------|-----------|------------|----------------------|------------------|------------------------------|------------------------|
| VRM1B | 1/4 | 60/1 | 115 | 2.2 | 15 | 5-15P | 884 | 1160 | 2.86 | 352 |
| VRM2B | 1/4 | 60/1 | 115 | 2.5 | 15 | 5-15P | 1700 | 2100 | 4.12 | 566 |
| VRM3B | 1/4 | 60/1 | 115 | 2.6 | 15 | 5-15P | 1920 | 2490 | 6.33 | 782 |

Standard Features

- Color Exterior: Black, White, Gray
- Color Interior: White, Black
- Exterior Sign Panel: Lighted Flat Panel
- Shelves: 4
- LED Vertical Lighting: Yes
- Power Cord: Yes, 9ft
- Hardwired: No
- NSF: Type II
- Door(s): 1, 2, or 3 Innovator Doors
- Air Discharge: Front
- Insulation: CFC-Free

Options

- Stainless steel exterior/interior.
- Adjustable leveling legs.
- PTM, baskets, peg bar and hooks.
- Additional display shelves available.
- Price tag molding and sign kit available.
- Alarm buzzer, door locks, door guard and shelf product stops.
- Caster kit for 1- and 2-door models.
- Left glass door opening is standard. Other options are available.

DOE 2017 Energy Efficiency Compliant Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 80°F and 55% R.H. Case is designed for holding pre-frozen product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit www.hussmann.com.

HUSSMANN®

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 314.291.2000

www.hussmann.com