



## MODELS

KPM-CG-(40, 50, 60, 80, 100, 120)-S

KPM-CG-(40, 50, 60, 80, 100, 120)-R

**CURVED GLASS DELI CASE  
DESIGNED FOR DELI PRODUCTS  
AND PACKAGED MEAT**

Case holds 33°F to 40°F • Forced air refrigeration • Tempered tilt-out curved front glass • Tempered side glass and rear sliding doors • Refrigerated rear storage • Cases can be multiplexed




SELF CONTAINED	Model	O.A. Length Inches	Volume FT <sup>3</sup>		Electrical - 115 volts						NEMA 115V Plug	Weight LBS.		Crate Size		
			Front	Rear	Compressor			Lights Fans HTRS	Evap Pan	Total AMPS		No Crate	With Crate	"L"	"W"	"H"
					H.P.	F.L.A.	L.R.A.									
	KPM-CG-60-S	60	18.88	5.33	1/2	9.6	43	0.65	3.3	14.35	5-20P	470	692	67	44	42
	KPM-CG-80-S	77-1/2	24.70	8.76	1/2	9.6	49	1.59	3.3	14.52	5-20P	575	838	85	44	42
	KPM-CG-100-S	101-1/8	32.54	13.41	5/8	8.9	47	1.80	3.3	14.23	5-20P	714	1032	108	44	42

REMOTE	Model	O.A. Length Inches	No. of Rear Doors	115 Volts Total Amps	B.T.U.	Weight LBS.	
						No	With
						Crate	Crate
	KPM-CG-60-R	60	1	0.97	2959	414	637
	KPM-CG-80-R	77 1/2	2	1.14	3253	521	783
	KPM-CG-100-R	101-1/8	3	0.91	4372	659	977

### STANDARD FEATURES

- Insulation-CFC free injected foam
- Interior-PVC coated steel gray
- Exterior-PVC coated steel silver
- Silver colored PVC coated steel front panel with black steel kick plate
- Foamed polystyrene black end panels
- Tempered tilt-forward front glass
- Removable rear tempered glass sliding doors
- Tempered glass inside shelf is NON-REFRIGERATED
- LED lighting in canopy
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporative pan for easy cleaning on S/C only
- Slide out condensing unit on S/C only
- Anti-condensate system for front glass
- Digital thermometer
- Levelling feet

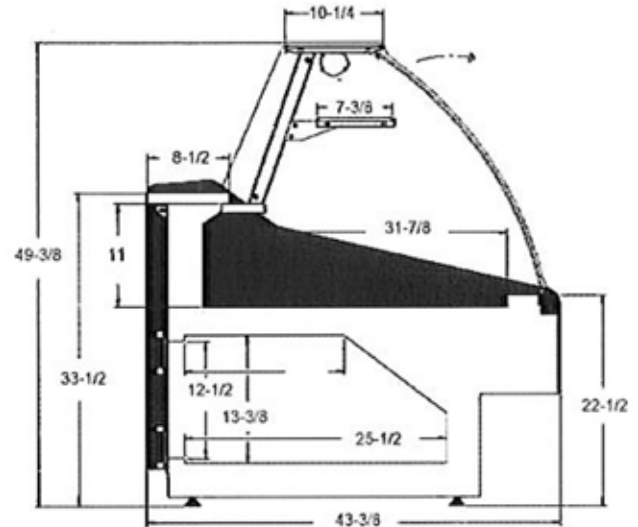

### OPTIONAL FEATURES

- Lift-up front glass
- Stainless steel interior
- Stainless steel exterior
- Other colors available
- White epoxy bi-level wire racks (2) or (3) level step sham
- Scale stand with receptacle
- Cutting board
- Knife support
- Condensate evaporative pan for remote cases
- Casters-add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"



### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

### WARRANTY

One year parts and labor with an additional

Tel: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100

Tel: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com