



Model:

- □ CIMO430
- □ CIMO436
- □ CIMO435



CIMO430 ON B55

Features and Benefits

- 30" (768 mm) wide space-saving design.
- Produces up to 500 lbs (227 kg) of ice per day.
- · Energy and Environment
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies. allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- Unique Dual Exhaust Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- Universal Smart Harness[™] control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

Ice Form

Bin Chart Kits for Combining Wider Bins with Smaller Models

FULL CUBE DIMENSIONS							
W x D x H (in.)	7/8 x 7/8 x 7/8						
W x D x H (mm) 22 x 22 x 22							
HALF CUBE DIMENSIONS							
W x D x H (in.)	3/8 x 7/8 x 7/8						



CUBE

	ICE STORAGE BINS											
	Model No. Capacity Width	B25 242 lbs (110 kg) 30 in (762 mm)	B40 344 lbs (156 kg) 30 in (762 mm)	B42 351 lbs (160 kg) 22 in (559 mm)	B55 510 lbs (232 kg) 30 in (762 mm)	B700 680 lbs (308 kg) 30 in (762 mm)	B110 854 lbs (388 kg) 48 in (1,219 mm)	B1000 1,000 lbs (454 kg) 48 in (1,219 mm)	B1300 1,320 lbs (599 kg) 48 in (1,219 mm)	B1325 1,325 lbs (601 kg) 60 in (1,524 mm)	B1660 1,660 lbs (753 kg) 60 in (1524 mm)	
Kits	CIMO430	Kit Not Required										
	CIMO436			N/A Kit No	Kit Not I	Kit Not Required	BPF-1	Hold Down Securement Recommended				
	CIMO435											

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS								
Ice Machine Model	Manifold							
	System	Replacement						
CIMO430								
CIMO436	IFQ1	IOMQ (1)						
CIMO435								

Note: All modular cube CIM units can be installed with the O_z-Matic[™] Ozone Delivery System.















Ice Maker Warranty

COMMERCIAL WARRANTY						
Ice Maker	3 YEARS parts and labor					
Evaporator and Compressor	5 YEARS parts					
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor					





Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.


- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

Dual Exhaust for Installation Flexibility




Water Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".
- E. Condenser water in, 3/8" FPT.
- F. Condenser water out, 1/2" FPT.



Air Cooled



Water Cooled

Operating Requirements

	MINIMUM	MAXI	мим	
		60 Hz	50Hz	
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)	
Water Temp.	40°F (4.4°C)	100 1 (30 C)		
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG	(5.5 BAR)	

Dimensions

ALL MODELS							
W x D x H (in.)	30.25 x 24.25 x 21.25						
W x D x H (mm)	768 x 616 x 540						

Specifications

		Ice Pro	Cube duction 24hrs	Water Usage gallons per 100 lbs of Ice 90°F air/70°F water							
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour	
CIMO43OA★	Air	435 (197)	320 (145)	19.8	-	5.43	215 /4 O /2	115/60/1	11.0		
CIMO43OW	Water	460 (209)	380 (172)	17.8	169.0	4.75	113/00/1	10.7	.3		
CIMO436A★	Air	465 (211)	350 (159)	18.0	-	5.46	208-230/60/1	6.3		5,100	
CIMO436W	Water	500 (227)	420 (191)	17.7	185.0	4.37	200-230/00/1	6.1			
CIMO435A	Air	460 (209)	355 (161)	20.0	-	5.97	220-240/50/1	8.7	16		

^{*} Daily ice production based on half cube configuration.

Notes:

Number of Wires: 3 (including ground)

CIMO43OA 155 (70.3) • CIMO43OW 155 (70.3) • CIMO436A 155 (70.3) • CIMO436W 155 (70.3) • CIMO435A 155 (70.3)

efrigerant Type: R4O4A

Approx. Shipping Weight lbs (kg):

★ ENERGY STAR qualified machine. Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates

.







B55

Features

- Application storage capacity from 242 lbs (110 kg) to 854 lbs (388 kg).
- Multiple bin tops provide an easy solution for mounting ice makers on different sized bins.
- Polyethylene bin liner is insulated with foam for maximum ice preservation — 1.5" to 3" (38 mm to 76 mm).
- 31" deep for use where space is at a premium.
- · Built-in ice scoop holders on certain models.
- Sturdy leg design 6" (152 mm) adjustable NSF approved legs standard.
- · Durable aluminum finish.

Bin Accessories

Ice-O-Matic Part Number	Description
1011517-22	Plastic ice shovel
1011517-23	Hanging bracket for ice shovel
1011517-24	46.5" Plastic paddle
1051517-29	Hanging bracket for ice paddle
9051127-01	82 Ounce ice scoop

Ordering and Specification Information – Required Bin Top/Cover

		Approximate	ICE S	Nugget Ice Makers	Flake Ice Makers		
Bin Model No.	Application Bin Storage Ibs (kgs)	Approximate Shipping Weight Ibs (kgs)	22" (559 mm) wide	30" (762 mm) wide	48" (1,219 mm) wide	21" (533 mm) wide	21" (533 mm) wide
B25PP*	242 (110)	74 (34)	KBT19	••	N/A	KBT19	KBT19
B4OPS	344 (156)	103 (47)	KBT19	00	N/A	KBT19	KBT19
B42PS	351 (160)	99 (45)	00	N/A	N/A	KBT24	KBT24
B55PS	510 (232)	125 (57)	KBT19	00	N/A	KBT19	KBT19
BIIOPS	854 (388)	163 (74)	N/A	BPF-1	00	KBT23	KBT23

Kit not required. Hold down securement recommended.

Ordering and Specification Information – Side by Side

		Application	Approximate	ICE S	eries™ Cube Ice M	akers	Nugget Ice Makers	Flake Ice Makers
Bin Model No.	Style	Bin Storage lbs (kgs)	Shipping Weight Ibs (kgs)	Two 22" (559 mm) wide	Two 30" (762 mm) wide	Two 48" (1,219 mm) wide	Two 21" (533 mm) wide	Two 21" (533 mm) wide
B25PP*	Slope Front	242 (110)	74 (34)	N/A	N/A	N/A	N/A	N/A
B4OPS	Slope Front	344 (156)	103 (47)	N/A	N/A	N/A	N/A	N/A
B42PS	Slope Front	351 (160)	99 (45)	N/A	N/A	N/A	N/A	N/A
B55PS	Slope Front	510 (232)	125 (57)	N/A	N/A	N/A	N/A	N/A
BIIOPS	Slope Front	854 (388)	163 (74)	N/A	N/A	N/A	KBT22	KBT22




Bin Height includes 6" (423 mm) legs. All bins have polyethylene liners.

^{*}Rotocast finish





Dimensions

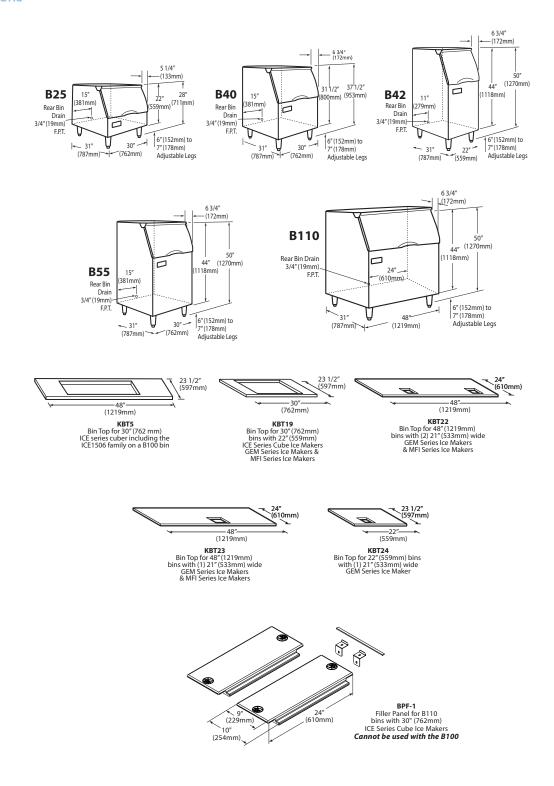

NOTES

Approx. Shipping Weight lbs (kg): B110 191 (87 kg) • B55 170 (77 kb) • B25 95 (43 kg) • B40 135 (61 kg) • B42 135 (61 kg)