



ICEO400 ON CIMO430

## Features

- Only 30" (762 mm) wide.
- Stores 200 lbs (91 kg) of ice.
- Direct Dispense – ensures that ice hits the glass every time.
- Ultra-low profile design.
- User friendly push-to-dispense operation.
- Quick Stop – prevents ice overflow and waste.
- Perfect for cube or Pearl Ice® ice makers.
- *Power Clean* allows access to the bin for easy cleaning without moving the ice machine. Interlock safety switch turns off machine agitation when tip-front access panel is removed.
- 1" (25 mm) foam-insulation for maximum ice preservation—no more quick-melting ice.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Auto Rotate – turns the ice every hour to consistently provide more dispensable ice.

## Options & Accessories

| Item Number      | Description                                  | Approximate Shipping Weight lbs (kg) |
|------------------|----------------------------------------------|--------------------------------------|
| KWGFID           | Water Glass Filler Kit for 30" IOD           | 2 (1)                                |
| KBT25O22         | Adapter for 22" Cubers or 21" GEM on 30" IOD | 24 (11)                              |
| KBT25O30         | Adapter for 30" Cubers or GEM on 30" IOD     | 24 (11)                              |
| KGEMDIV & KEBIOD | Required for GEM on 30" IOD                  | 3 (1)                                |

### Ice Form



#### CUBE

| FULL CUBE DIMENSIONS |                 |
|----------------------|-----------------|
| W x D x H (in.)      | 7/8 x 7/8 x 7/8 |
| W x D x H (mm)       | 22 x 22 x 22    |
| HALF CUBE DIMENSIONS |                 |
| W x D x H (in.)      | 3/8 x 7/8 x 7/8 |
| W x D x H (mm)       | 22 x 22 x 10    |

### Ice Form




#### PEARL ICE

| PEARL ICE DIMENSIONS |            |
|----------------------|------------|
| H x Dia. (in.)       | 1/2 x 3/8  |
| H x Dia. (mm)        | 12.7 x 9.5 |

### ICE PRODUCTION FOR OPTIONAL CUBE OR PEARL ICE MAKERS\*

| Model No.     | ICEO330   | ICEO320   | ICEO430   | ICEO520   | ICEO530   | ICEO636      | GEMO450   | GEMO650   | GEMO956      |
|---------------|-----------|-----------|-----------|-----------|-----------|--------------|-----------|-----------|--------------|
| Air-Cooled    | 336 (153) | 334 (152) | 505 (230) | 520 (236) | 565 (256) | 650 (295)    | 464 (210) | 740 (336) | 1,100 (499)  |
| Water-Cooled  | 333 (151) | 349 (159) | 496 (225) | 527 (240) | 556 (256) | 618 (280)    | 508 (230) | 770 (349) | 1,250 (567)  |
| Remote-Cooled | N/A       | N/A       | N/A       | N/A       | 567 (258) | 670 (304)    | N/A       | 770 (349) | 1,200 (544)  |
| Voltage Char. | 115/60/1  | 115/60/1  | 115/60/1  | 115/60/1  | 115/60/1  | 208-230/60/1 | 115/60/1  | 115/60/1  | 208-230/60/1 |

Tested at 70°F Air/50°F Water.  
\*Pounds (Kilograms) per 24 hours.

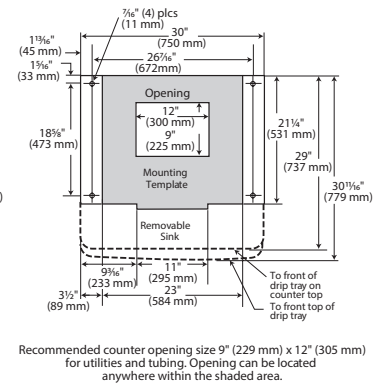

### Counter Opening

## Dimensions

| ALL MODELS      |                       |
|-----------------|-----------------------|
| W x D x H (in.) | 30.25 x 30.69 x 35.62 |
| W x D x H (mm)  | 768 x 779 x 905       |

| Model Number | Dispenser Operation | Bin Storage lbs (kg) | Voltage Characteristics | No. of Wires | Min. Circuit Ampacity | Maximum Fuse Size | Approximate Shipping Weight lbs (kg) |
|--------------|---------------------|----------------------|-------------------------|--------------|-----------------------|-------------------|--------------------------------------|
| IOD200       | Push Bar            | 200 (91)             | 115/60/1                | Cord         | 3.5                   | 15                | 193 (88)                             |

Rev: 01/18  
Part: 4001