

## Mini Tank Water Heater, 2.5 Gallons


Plumbing



### Standard Features

- Point-of-use heating eliminates long hot water pipe runs
- Used for hand washing
- Compact design fits virtually anywhere
- Easy and ready to install
- Hot or cold water feed
- Adjustable temperature control 50°-140°F
- T&P relief valve included
- Enameled glass lined tank for extended life
- Floor and wall mountable, wall bracket included
- Field replaceable element
- ETL tested to UL 174 and NSF 372
- All units plug into standard outlets, cord included
- Single weld design
- Tank status indicator light:  
Green - ready mode, Red - heating mode
- Warranty, (5) years limited on leaks, (2) years on defects

Model	Description
HS-MTH25	Mini Tank Water Heater, 2.5 Gallons

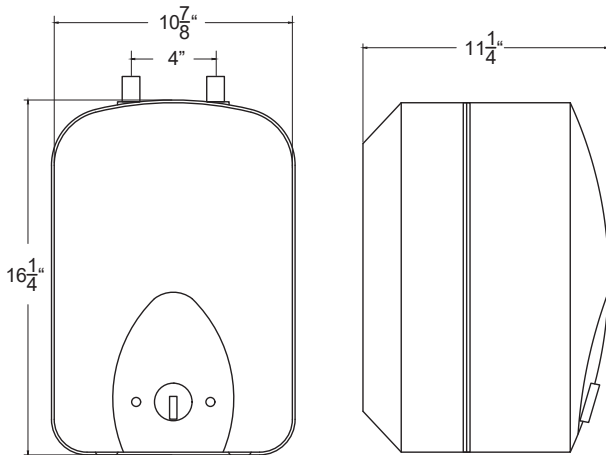

### Specifications

Voltage	120V
Amperage	12 A
Heating Capacity	1440 watts
Water Connections	1/2" NPT
Recovery Time	15 minutes at 60° inlet water temp
Phase	Single
Temperature Range	50°F - 140°F
Max Operating Pressure	150 PSI
Tank Volume (gal)	2.5
Weight (lb.)	20



#### WARNING:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

#### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


## Mini Tank Water Heater, 2.5 Gallons

Plumbing


### Recovery Time

15 minutes at 60° inlet water temperature


### Standalone Point-of-Use Heating Application

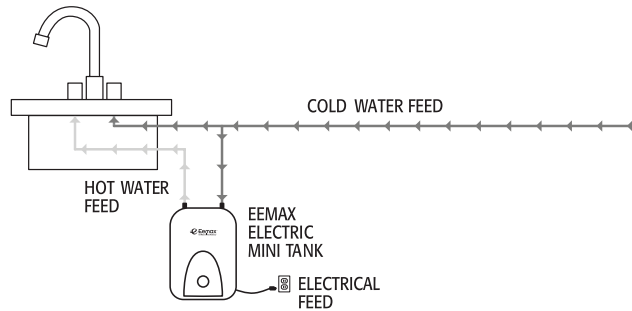

### Standalone Point-of-Use Multi Fixture Application

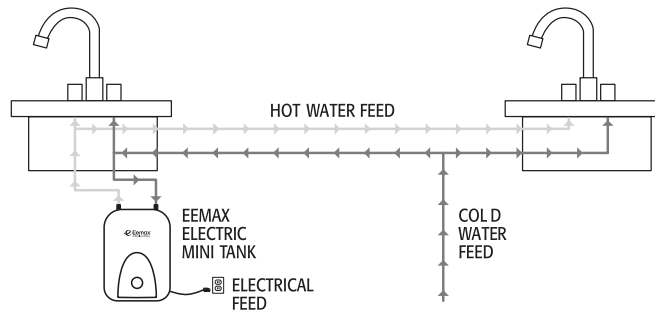

### Point-of-Use Booster Heating Application from Central Tank Heating System

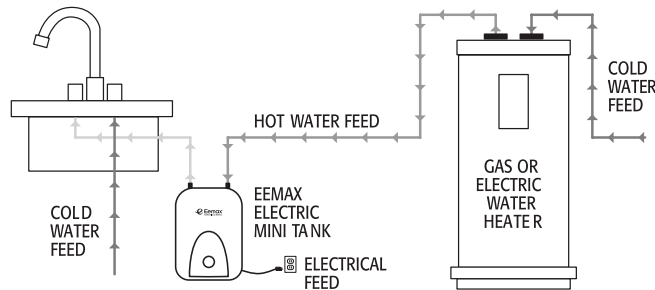

### Cure for "Cold Water Sandwich" Gas Tankless Heating Application

