



01F-ek

SIZE:
23,62x25,59xH53,94 inch
Cycle period: 2'-3'-4' minutes
Capacity per hour:
Baskets/H 30/20/15
Dishes/H : 540/360/270
Dishes per basket 12÷18


- Undercounter dishwasher;
- Stainless steel construction 18/10AISI 304;
- Wash cycle time: 2'-3'-4' minutes;
- Endless cycle : max 15 minutes;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Double skin with thermic and acoustic insulation;
- Cycle start with soft-start system;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- Self-washing slanted tank with rounded edges;
- Integral tank filters;
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump,
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;



Accessories:
 2 baskets for dishes;
 1 generic basket;
 2 cutlery containers;

OPTIONS
 • Tank drain unit with filter,

Specifications	F92-ek	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	35	A
PLATES CLEARANCE	15,75	inch
WORK HEIGHT	33,46	inch
TANK CAPACITY	42	Lt.
BOILER CAPACITY	6	Lt.
PUMP DELIVERY	260	Lt./min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,40	Lt.
WATER CONSUMPTION PER HOUR	52	Lt.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	TH(°f)
RINSING WATER TEMPERATURE	180 ÷ 195	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	81	Kg
GROSS WEIGHT	85	Kg
PACKING SIZE	/24,80xL28,37xH54,72	inch
NOISE LEVEL	<54	dB(A)

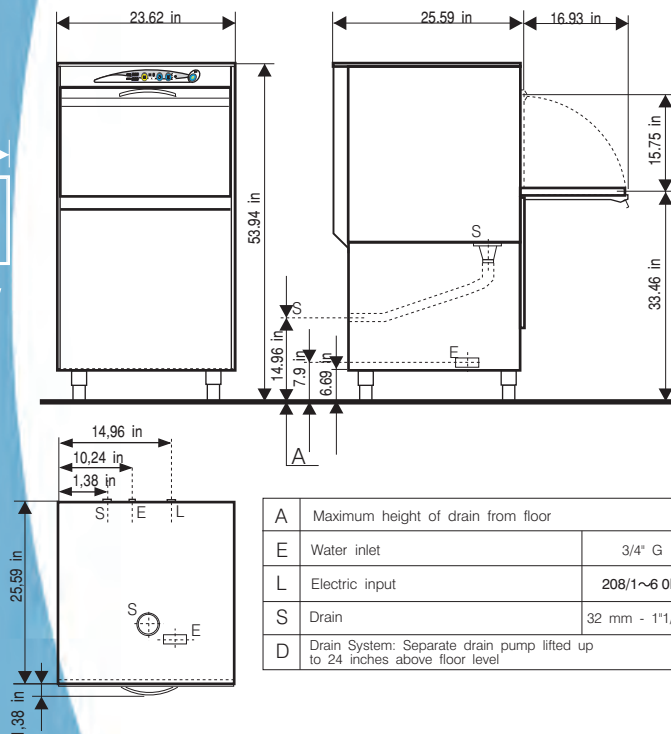

A	Maximum height of drain from floor	
E	Water inlet	3/4" G
L	Electric input	208/1~6 0Hz
S	Drain	32 mm - 1 1/4 G
D	Drain System: Separate drain pump lifted up to 24 inches above floor level	

The manufacturer reserves the right to make modifications of materials and models without warning.