



- 16'x16' Square basket glasswasher;
- Stainless steel construction 18/10AISI 304;
- Wash cycle time: 2' minutes;
- Double skin with thermic insulation;
- Stainless steel lower rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- Self-washing slanted pressed tank with rounded edges;
- Integral tank filter;
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;

**SIZE:**  
**18,976 x 20,078 x H27,165 inch**  
**Cycle period: 2' minutes**  
**Capacity per hour:**  
**Baskets/H 30**



# Minibar


### Accessories:

- 2 baskets for glasses;
- 1 soucers insert
- 1 cutlery container;

### OPTIONS

- Tank drain unit with filter,
- Stainless steel base H18,50 inch,

Specifications	Minibar	
VOLTAGE	115 V - 60Hz	V
WASHING PUMP	200	W
WASH TANK ELEMENTS	500	W
RINSE TANK ELEMENTS	1500	W
TOTAL RATING	1700	W
MAX CURRENT INTENSITY	16	A
PLATES CLEARANCE	11,42	inch
WORK HEIGHT	12,795	inch
TANK CAPACITY	9	Lt.
BOILER CAPACITY	3	Lt.
PUMP DELIVERY	160	Lt./min
WATER CONNECTION	50÷54	°F
WATER CONSUMPTION PER CYCLE	2,00	Lt.
WATER CONSUMPTION PER HOUR	60	Lt.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	Th(°f)
RINSING WATER TEMPERATURE	180 ÷ 195	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	50	Kg
GROSS WEIGHT	55	Kg
PACKING SIZE	/ 19,68xL22,05xH25,59	inch
NOISE LEVEL	<60	dB(A)

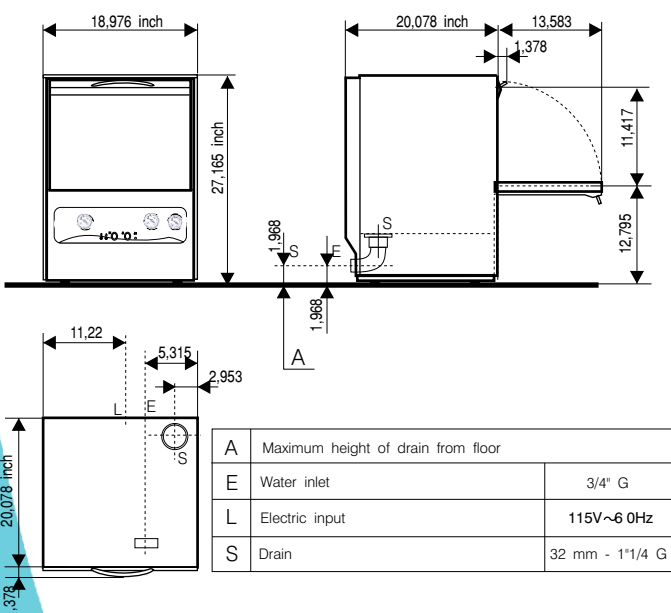

The manufacturer reserves the right to make modifications of materials and models without warning.