




P700-ek

- Pot washing-machine square basket 25,20' x 26,38'
- Complete stainless steel construction 18/10 AISI 304;
- Soft touch electronic control panel;
- Washing period cycle 120"-180"-240"sec.+ endless cycle;
- Digital thermometers;
- Counterbalanced double door;
- Lower and upper rotating wash arms in stainless stell;
- Lower and upper rotating rinse arms in stainless stell;
- 2 Integral tank filters;
- Self- washing slanted tank with rounded edges;
- Double skin with thermic and acoustic insulation;
- Stainless steel washing pump;
- Rinsing booster pump;;
- Automatic tank loading;
- Frontal control panel for easy maintenance;
- Security thermostat;

SIZE:31,69 x 33,27x H72,24 inch
Cycle period 2'-3'-4' minutes
Baskets/H - casiers/H: 30÷20÷15

Accessoires:

- 1 stainless steel basket 25,20 X 26,38 mm
- 1 stainless steel baking-pan insert

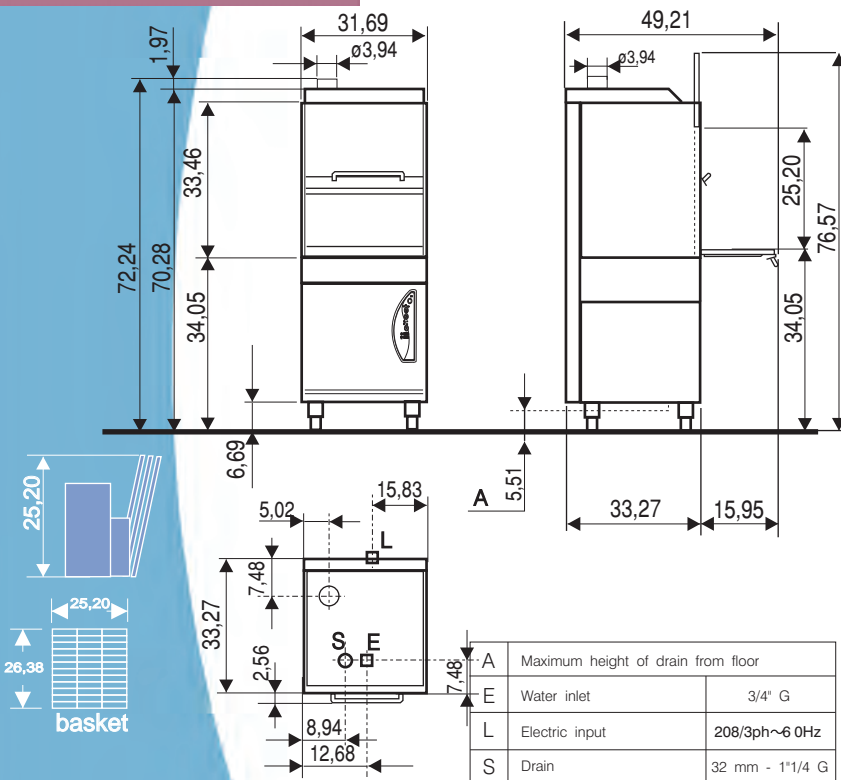

Specifications	P700-ek	
VOLTAGE	208/3ph - 60 Hz	V
WASHING PUMP	2200	W
RINSING PUMP	385	W
WASH TANK ELEMENTS	4500	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	8200	W
MAX CURRENT INTENSITY	16	A
PLATES CLEARANCE	25,20	inch
WORK HEIGHT	34,05	inch
TANK CAPACITY	61	Lt.
BOILER CAPACITY	8	Lt.
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,80	Lt.
WATER CONSUMPTION PER HOUR	84÷56÷42	Lt.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	Th(°f)
RINSING WATER TEMPERATURE	180 ÷ 195	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	160	Kg
GROSS WEIGHT	170	Kg
PACKING SIZE	/35,04xL35,43xH73	inch
NOISE LEVEL	<70	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.