

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Marchia MDS1200-B 48" Black Low Profile Open Air Refrigerated Merchandiser



FEATURES

- Brilliant internal LED illumination under each shelf
- Digital temperature control and display
- Durable stainless steel glass shelves
- (4) Casters, 2 adjustable feet
- Tempered glass
- Black exterior finish
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Self-contained refrigeration system
- Eco-friendly R-290 refrigerant

This Marchia refrigerated open grab and go food display case includes LED lighting and night curtain as well a user accessible digital temperature controller.

- cETLus Listed
 - ETL Sanitation Listed
- Conforms to UL & NSF Standards



This unit requires a dedicated 20 Amp Circuit installed by a licensed electrician.

USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	47.6"L x 28.9"D x 53.2"H
Interior Dimensions	45.0"L x 23.6"D x 27.4"H
Packaging Dimensions	50.0"L x 31.3"D x 58.9"H
Net Volume	14.5 cu. ft.
Unit Weight	323 lb.
Shipping Weight	393 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Wattage	1300
Amps	12.8
Plug Type	NEMA 5-20P
Power Cord Length	90"

COOLING

Temperature Range	36°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital

CONSTRUCTION

Exterior Material	Glass and Painted Steel
Shelf Quantity	4 + Base
Shelf Size	Upper: 43.46" x 8.27" Lower: 43.46" x 12.20"
Shelf Material	Stainless Steel
Interior Light	L.E.D
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without

TECHNICAL DRAWING


MODEL: **MDS1200-B**

MFR ITEM #:




NEMA 5-20P

FRONT VIEW

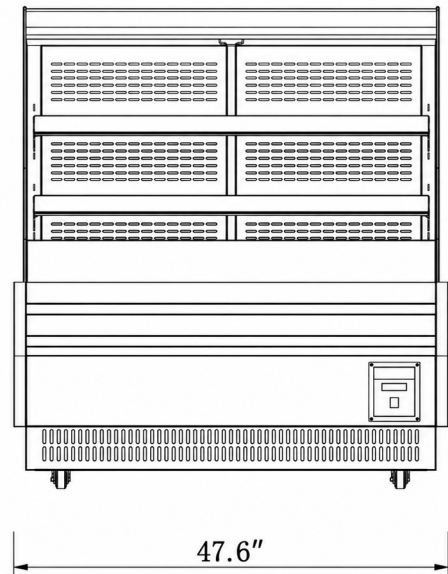

SIDE VIEW

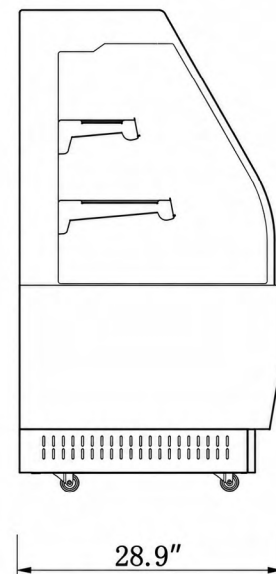

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.