

Project:	Quantity:
Model #:	Approval:

*For Commercial Use Only*

### Marchia MDS220 20" Open Air Cooler Grab & Go Display Refrigerator



#### FEATURES

- Brilliant Internal LED lighting on top and bottom
- Digital temperature controller and display
- (4) Casters with (2) brakes
- Double tempered glass
- With night curtain
- Ventilated cooling system
- Automatic defrost
- Filter mesh in front of the base
- Adjustable shelves
- Condensator at back side free of maintenance
- Condensation water evaporated automatically

This Marchia refrigerated open grab and go food display case includes LED lighting and adjustable shelves as well a user accessible digital temperature controller. Open display to provide customer with access.

- cETLus Listed
  - ETL Sanitation Listed
- Conforms to UL & NSF Standards



**U**SR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

## TECHNICAL DATA

### DIMENSIONS

Exterior Dimensions	19.4"L x 26.7"D x 68.7"H
Packaging Dimensions	22"L x 28.7"D x 75.9"H
Net Volume	7.7 cu. ft.
Unit Weight	210 lb.
Shipping Weight	247 lb.

### ELECTRICAL

Voltage	110-120
Hertz	60
Phase	1
Wattage	1135
Amps	11.8
Plug Type	NEMA 5-15P
Power Cord Length	79"

### COOLING

Temperature Range	36°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital

### CONSTRUCTION

Exterior Material	Glass and Stainless Steel
Shelf Quantity	3 + Base
Shelf Size	17.32"L x 10.83"D
Shelf Material	Coated Wire
Adjustable Shelf	Yes
Interior Light	(4) L.E.D
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without

## TECHNICAL DRAWING


MODEL: **MDS220**

MFR ITEM #:




NEMA 5-15P


FRONT VIEW

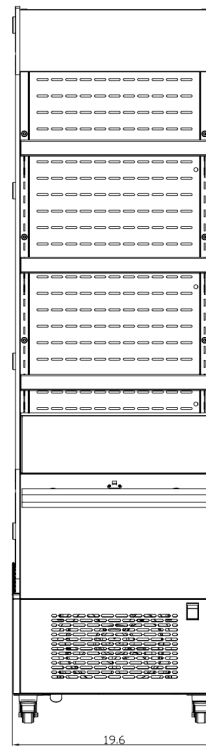

SIDE VIEW

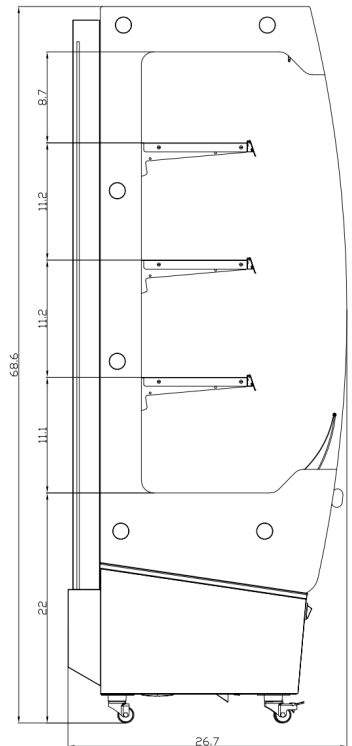

BACK VIEW

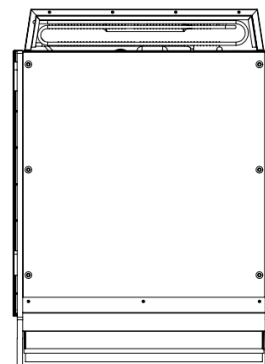

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.