

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

Marchia MSTAR72 72" Black Dual Service Open Air Display Case



FEATURES

- Brilliant internal LED illumination on sides
- Digital temperature controller and display
- (4) casters with (2) brakes
- Refrigerated rear access top
- Foamed with CFC-free polyurethane insulation
- Includes energy-saving night cover
- Stainless steel interior standard
- Eco-Friendly R290 refrigerant
- Two-step stainless steel shelf included
- Adjustable glass shelf with price tag strip
- Lift up top curved glass

The Marchia dual service display case is a valuable addition to your deli shop, sandwich shop, bakery, cafe, or other foodservice establishment. Our refrigerated bakery display case is a reliable and durable solution for displaying your hot selling treats to increase impulse sales in your business.

- cETLus Listed
 - ETL Sanitation listed
- Certified to NSF Standard



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	70.8"L x 33.2"D x 60.9"H
Interior Dimensions	67.7"L x 15.2"D x 14.4"H (top) 67.7"L x 23.6"D x 17.4"H (bottom)
Packaging Dimensions	62"L x 36.2"D x 66.7"H
Net Volume	24.2 cu. ft.
Unit Weight	581 lb.
Shipping Weight	688 lb.

ELECTRICAL

Voltage	110
Hertz	60
Phase	1
Amps	14
Watts	1400
Plug Type	NEMA 5-20P
Power Cord Length	92"

COOLING

Temperature Range	35.6°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4

CONSTRUCTION

Interior Material	Stainless Steel
Shelf Quantity	1 (two-step stainless steel) 1 (glass: 64.5" x 9.41")
Adjustable Shelf	Yes
Features	L.E.D Lighting Night Curtain
Mobility Wheels/Casters	(4) Qty: 2 with brakes, 2 without


- Designed to operate in locations not exceeding 75°F and 55% relative humidity.

DIAGRAM


MODEL: MSTAR72

MFR MODEL:

FRONT VIEW

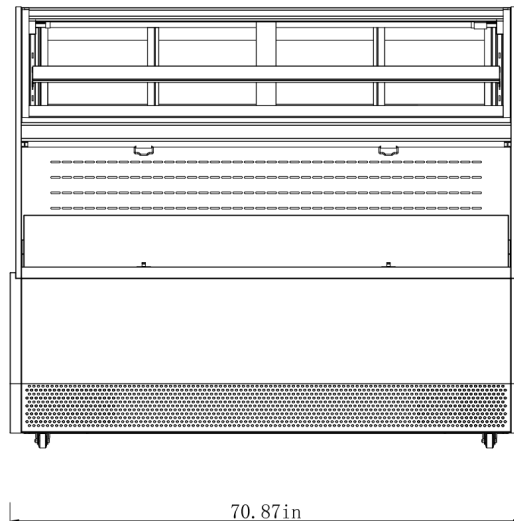

SIDE VIEW

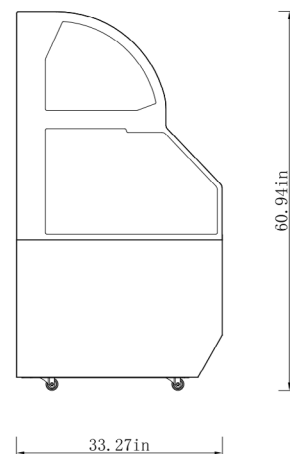

BACK VIEW

