

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



## Light Duty Commercial Microwave Oven



## Model 1025F1A

### Features

- Medium Capacity (0.9 cu.ft / 25 L), accommodates a 12"(305 mm) platter.
- Able to withstand the demands of the Commercial Food Service environment with stainless steel cabinet and oven cavity.
- 1000 Watts of Cooking power.
- Bottom energy feed.
- 5 power levels and 3 cooking stages for different cooking demands.
- 60:00 maximum cooking time and 100 auto programs can cover most product demands.
- Chef/Test Kitchen Support.
- User-friendly touch control pads AND Electronic dial timer with braille navigation is great for self-service locations and is ADA Compliant.
- Time entry option and X2 multiple quantity pad provide manual operation and cooking of multiple portions.
- Oven cavity light to monitor cooking status without opening the door.
- EZ Grab'n Go door handle for reliable use, no moving parts.

### Applications

+ Restaurants    + Healthcare    + Schools    + Vending    + Breakrooms    + Office Coffee Service

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



## Model 1025F1A

**Light Duty**  
Commercial Microwave Oven


Light duty commercial microwave from Midea shall have user-friendly touch pads with braille navigation. Oven shall be programed up to 100 auto items with 60:00 maximum cooking time for each. Oven shall have 5 power levels and 3 cooking stages. There shall have time entry option and X2 multiple quantity pad for flexible Operation. LED display and end of cycle beep. Microwave output shall be 1000 Watts distributed by single magnetron with a bottom rotating antenna. An interior light shall make the food easy to monitor without opening the door. The medium capacity 0.9 cubic ft. (25 liter) cavity shall accommodates a 12" (305 mm) platter or 6" tall H or X pan with cover. Durable door shall have an EZ Grab and Go handle with a 90° + opening for easy access. Oven shall have a stainless steel exterior wrap, door, and interior cavity. Chef/Test Kitchen Support. Microwave oven shall be listed by UL, CUL and ETL SANITATION.

### Specifications

| Dimensions                            |                                                       |
|---------------------------------------|-------------------------------------------------------|
| Cavity size                           | 0.9 cu.ft (25 Liters)                                 |
| Cavity Dimension(WxDxH)               | 327 mm x 346 mm x 200 mm (12 7/8" x 13 5/8" x 7 7/8") |
| Gross Dimension(WxDxH)                | 511 mm x 432 mm x 311mm (20 1/8" x 17" x 12 1/4")     |
| Inside Package Dimension(WxDxH)       | 581 mm x 478 mm x 380 mm (22 7/8" x 18 7/8" x 15")    |
| Outer Package Dimension(WxDxH)        | 595 mm x 492 mm x 407 mm (23 3/8" x 19 3/8" x 16")    |
| Ship Weight (approx)                  | 16.5 kg (36.4 lb)                                     |
| Product Weight                        | 14.7 kg (32.4 lb)                                     |
| Door Depth                            | "30-15/64" "(768), 90°+ door open"                    |
| Exterior Finish                       | Stainless steel                                       |
| Interior Finish                       | Stainless steel                                       |
| No Turnable                           | Yes                                                   |
| Interior Light                        | Yes, Incandescent                                     |
| Loading Capacity (20" / 40" / 40" HD) | 210 / 460 / 552                                       |
| Electrical specifications             |                                                       |
| Power Consumption                     | 1500 W                                                |
| Power Output                          | 1000 W                                                |
| Power Source                          | 120 V, 60 Hz, 15 A single phase                       |
| Plug Configuration                    | NEMA 5-15P                                            |
| Plug Cord                             | 5 ft. (1.5m)                                          |
| Plug Image                            |                                                       |
| Frequency                             | 2450 MHZ                                              |

| Technical specifications |                           |
|--------------------------|---------------------------|
| Filter Board             | Yes                       |
| Settings Programmable    | 100                       |
| Power Levels             | 5                         |
| Stage Cooking            | 3                         |
| Control Type             | Membrane Touch            |
| Defrost by Time          | Yes                       |
| Time Entry Option        | Yes                       |
| Max. Cooking Time        | 00:60:00                  |
| Multiple Portion Setting | Yes, X2                   |
| Express cook             | Yes                       |
| Cooking End Signal       | Yes                       |
| Magnetron Protection     | Yes                       |
| Magnetrons               | 1                         |
| Function type            | Light-duty                |
| Microwave Distribution   | Bottom rotating antenna   |
| Braille                  | Yes                       |
| Stackable installation   | No                        |
| Safety Listing           |                           |
| Safety Listing           | UL+CUL+FCC+ETL SANITATION |
|                          |                           |

### Installation Clearances

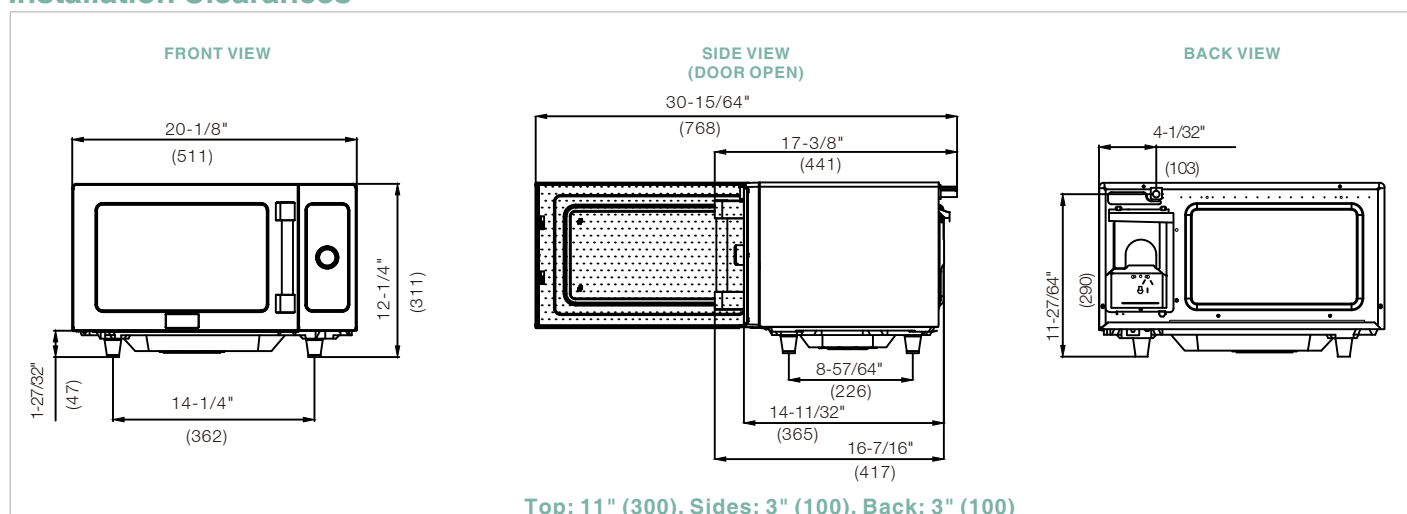

### Warranty Service

3 Year Limited Warranty: 3 year Magnetron and 1 Year Parts, Labor and Travel/Shipping.

### Support Center

Midea Food Service Equipment Service Support Center, 1-855-238-5604 or USService\_Microwave@midea.com.

