



ITEM NO. _____
PROJECT _____
LOCATION _____
DATE _____ QTY. _____

NLMC SERIES

Dual Access Milk Coolers

MODELS

- ☐ NLMC08D*
- ☐ NLMC12D*
- ☐ NLMC16D*

*Add suffix "W" for white finish, "S" for stainless steel



NLMC12DW

NLMC12DS



FEATURES

CONSTRUCTION

- White enamel painted smooth steel exterior with stainless steel interior
- Dual access to allow serving of two feeding lines
- Corner bumpers
- Four 4" factory-installed easy-roll swivel casters (two locking)
- Epoxy-coated heavy-duty floor racks
- NSF-listed digital thermometer
- Foamed-in-place eco-friendly polyurethane insulation
- Doors and cabinet top foamed-in-place with polyurethane insulation
- Standard floor drain

DOORS

- Self-service doors with stainless steel exterior and interior
- Fold-back, insulated doors equipped with locks, gaskets and stainless steel hinges
- Designed to be easily opened by children for self-service
- Hold-open feature secures door during serving

REFRIGERATION

- Self-contained bottom mounted system, air-cooled condensing unit
- Powerful, large-capacity system allows cooler to quickly pull product down to storage temperature and maintain it
- Cold wall evaporator with no moving parts which allows more storage space
- Refrigerant: R290
- Operating temperature: 34° to 40°F (1° to 4°C)

WARRANTY

- Standard limited three year parts and labor
- Additional two year coverage on compressor part

OPTIONS

- ☐ Add suffix "S" for all stainless steel exterior



NLMC SERIES DUAL ACCESS MILK COOLERS


TECHNICAL SPECIFICATIONS

Model*	NLMC08D*	NLMC12D*	NLMC16D*
Crated Weight (lbs.) (kg)	165 (75)	212 (96)	243 (110)
Crated Height (in) (mm)	48.6 (1234)	48.6 (1234)	48.6 (1234)
Crated Width (in) (mm)	35.8 (909)	50.8 (1290)	59.8 (1519)
Crated Depth (in) (mm)	32.3 (820)	32.3 (820)	32.3 (820)
Interior Height (in) (mm)	25.2 (640)	25.2 (640)	25.2 (640)
Interior Width (in) (mm)	30.9 (785)	45.9 (1166)	54.9 (1394)
Interior Depth (in) (mm)	26.5 (673)	26.5 (673)	26.5 (673)
Overall Height (in) (mm)	42 (1067)	42 (1067)	42 (1067)
Overall Width (in) (mm)	34 (865)	49 (1245)	58 (1475)
Overall Depth (in) (mm)	30.6 (777)	30.6 (777)	30.6 (777)
Gross Cubage (CuFt) (L)	13.2 (374)	19.6 (555)	23.5 (665)
Number of Floor Racks	2	2	2
Number of Casters	4	4	4
Condensing Unit Size	1/4 HP	1/4 HP	1/4 HP
Refrigerant	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Nema Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	3.0	3.0	3.0


MODEL	CASES WITH CARTONS			
	13" x 13" x 11"H		19" x 13" x 11"H	
	CASES	CARTONS	CASES	CARTONS
NLMC08D*	8	352	4	288
NLMC12D*	12	528	8	576
NLMC16D*	16	704	10	720

MODEL	LOOSE CARTON (WITHOUT CASES)			
	FLAT TOP		PEAKED TOP (GABLE)	
	1/2 PINT	1 PINT	1/2 PINT	1 PINT
NLMC08D*	864	432	680	430
NLMC12D*	1368	684	1020	645
NLMC16D*	1800	900	1360	860


* Add suffix "W" for white exterior, "S" for stainless steel.




NLMC08D* PLAN VIEW




NLMC08D* ELEVATION VIEW

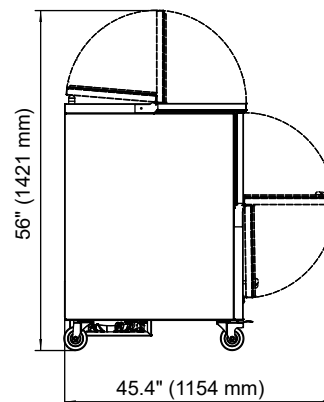


SIDE VIEW
ALL MODELS

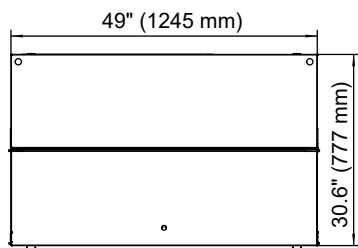


NLMC12D* PLAN VIEW

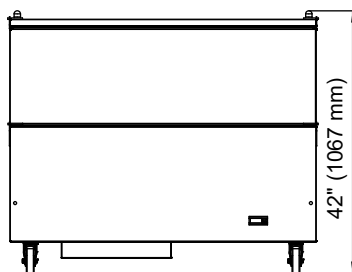

NLMC12D* ELEVATION VIEW

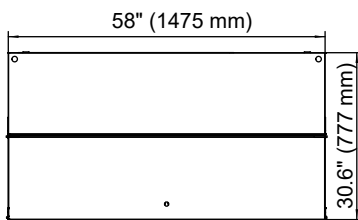

NLMC16D* PLAN VIEW

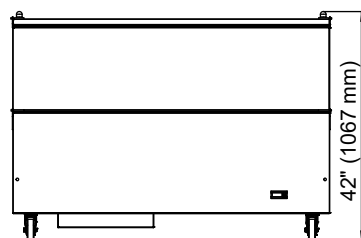

NLMC16D* ELEVATION VIEW



NLMC SERIES DUAL ACCESS MILK COOLERS

LISTINGS



HOOKUP

Via plug in, 9.8 foot long flexible three wire 14/3 cord with molded plug.



BID SPECIFICATIONS

Item no. NLMC _____
Provide _____ () Dual
Access Milk Cooler(s), Norlake model
no. NLMC _____.

Milk cooler will be a dual access
type and will be constructed of white
painted steel exterior with stainless
steel interior. Doors to be stainless
steel on the exterior and interior.
Doors will also be locking and fold-

back type. In addition, door will be
equipped with gaskets, stainless steel
hinges and a hold-open feature to
secure during serving.

Cooler to be provided with four
swivel casters (two locking) and
an NSF-listed digital thermometer.
Cabinet insulation will consist of
foamed-in-place polyurethane.

The self-contained refrigeration

system will feature a cold wall
evaporator and R290 refrigerant. The
operating temperature will 34° to
40°F (1° to 4°C).

Cooler to have standard limited
three year parts and labor with an
additional two year coverage on
compressor part.

Cooler to be ETL listed in the U.S.
and Canada and ETL Sanitation listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.
All specifications within this publication subject to change without notice.

