



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

SRTG SERIES THERMOSTAT GRIDDLES

Sierra Griddles feature all-stainless steel construction, the SRTG Series has a powerful capacity of 30,000 BTU per each "U" burner. The griddle feature a modern look and design, form and function fit for the most demanding kitchens at an affordable price. All with the ease of modular customization.

SRTG-24



* SRTG Griddles have an enlarged cooking depth of 20.6" to maximize your cooking surface area.

*Stainless steel stand with adjustable legs is optional

STANDARD FEATURES

- ❖ All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and valve controls
- ❖ Heavy gauge welded front frame
- ❖ "U" shaped burners rated at 30,000 BTU/hr. Located every 12" for even heat distribution on griddle surface
- ❖ Precise temperature control from 200°F (93°C) to 450°F (232°C)
- ❖ 4" wide grease trough for easy cleaning
- ❖ Removable grease tray with weep hole
- ❖ One stainless steel standing pilot for each flute for instant ignition
- ❖ Aeration baffles between "U" shaped burners to provide uniform surface temperature
- ❖ Highly polished 1" thick steel griddle plates
- ❖ Compact design for counter top use
- ❖ 4" Stainless steel legs with an adjustable increase of 1.5"
- ❖ Features a full 5.7" landing edge for increased plate stability
- ❖ The SRTG is shipped from the factory, ready for natural gas installation. An LP conversion kit is included with each unit




Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

MVP
GROUP
www.mvpgroupcorp.com

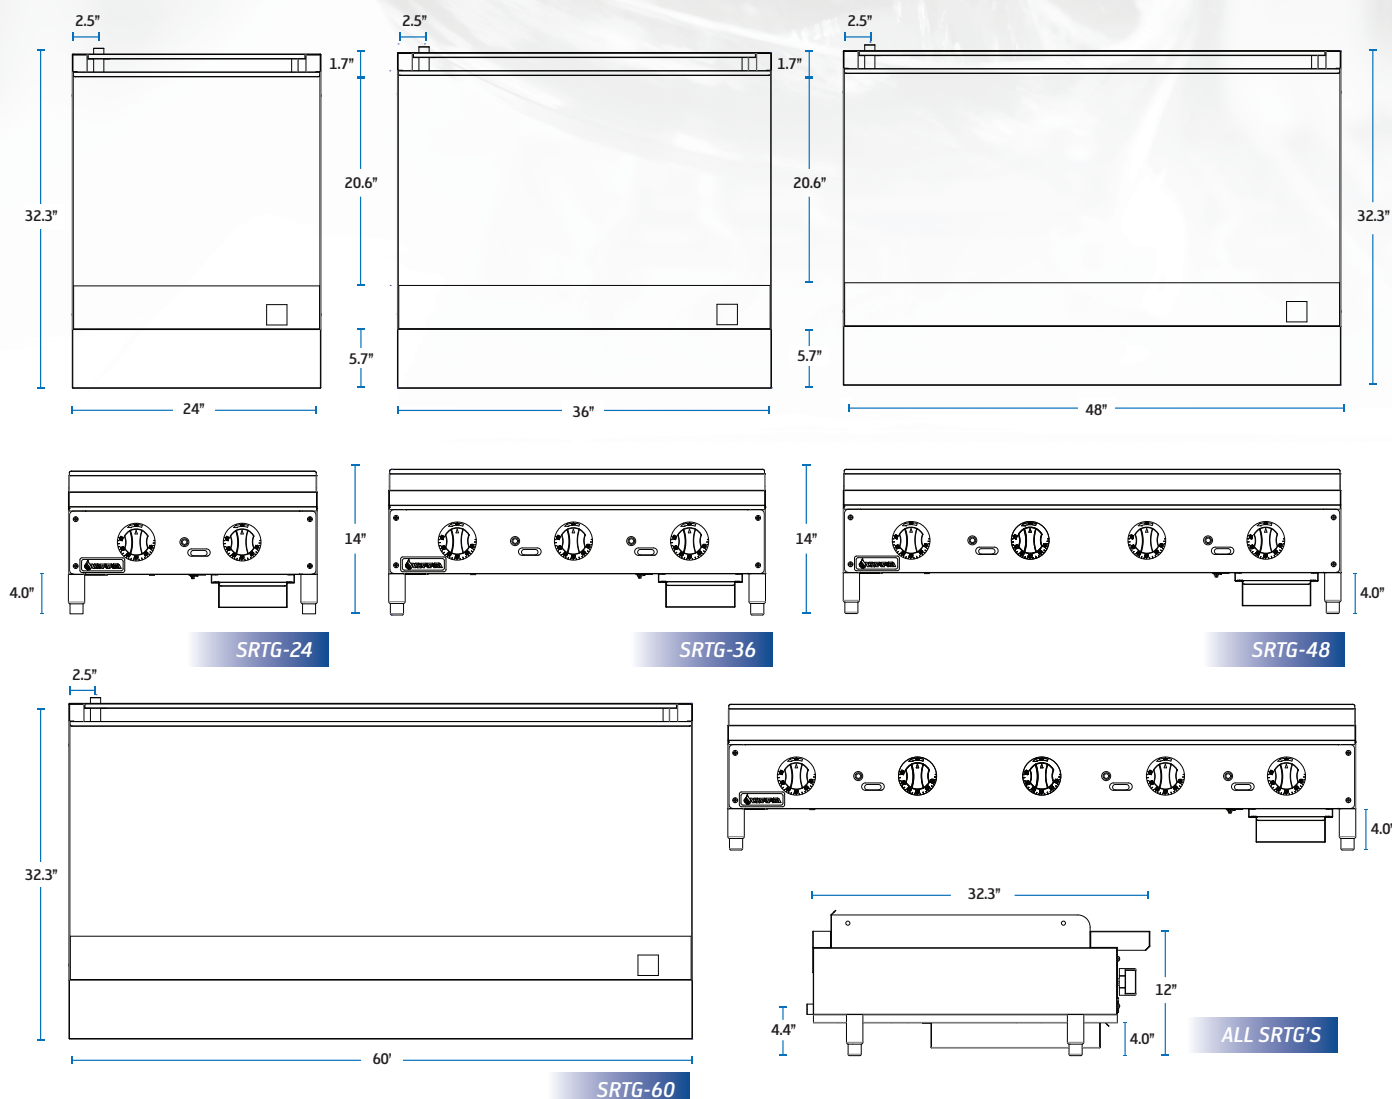

SPECIFICATIONS

MODEL NUMBER	EXTERNAL DIMENSIONS (WxDxH)	NUMBER OF BURNERS	BTU'S PER BURNER	TOTAL BTU	NET WEIGHT	SHIPPING WEIGHT
SRTG-24	24" X 32.3" X 14"	2	30,000	60,000	143 LBS	174 LBS
SRTG-36	36" X 32.3" X 14"	3	30,000	90,000	198 LBS	242 LBS
SRTG-48	48" X 32.3" X 14"	4	30,000	120,000	253 LBS	304 LBS
SRTG-60	60" X 32.3" X 14"	5	30,000	150,000	308 LBS	372 LBS



SANITATION
NSF/ANSI 4



Warranty: 12 months parts & labor.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 4" W.C. - Natural Gas | 10" W.C. - Propane

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear
Specify type of gas and altitude, if over 2,000 feet, when ordering.

SIERRA RANGE is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.



Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com