


## **BX-Series**

### **SIMPLE BENCH SCALES**

- 1/6000 Resolution, Legal For Trade
- Large stainless steel removable platter
- Ultra quick-response weight display
- Heavy Duty design, IP-65 Rating
- Tough high quality UV-sealed keypad
- Large size heavy-duty cast aluminum platform
- Capacities: 120 lb, 300 lb, or 600 lb
- Tilt and Swivel Display Indicator head
- User- friendly PLU programming
- Quick operation keypad for high throughput
- Function keys: G/N/T, Unit, Mode, Tare, & Zero
- Internal power supply with long AC power cord

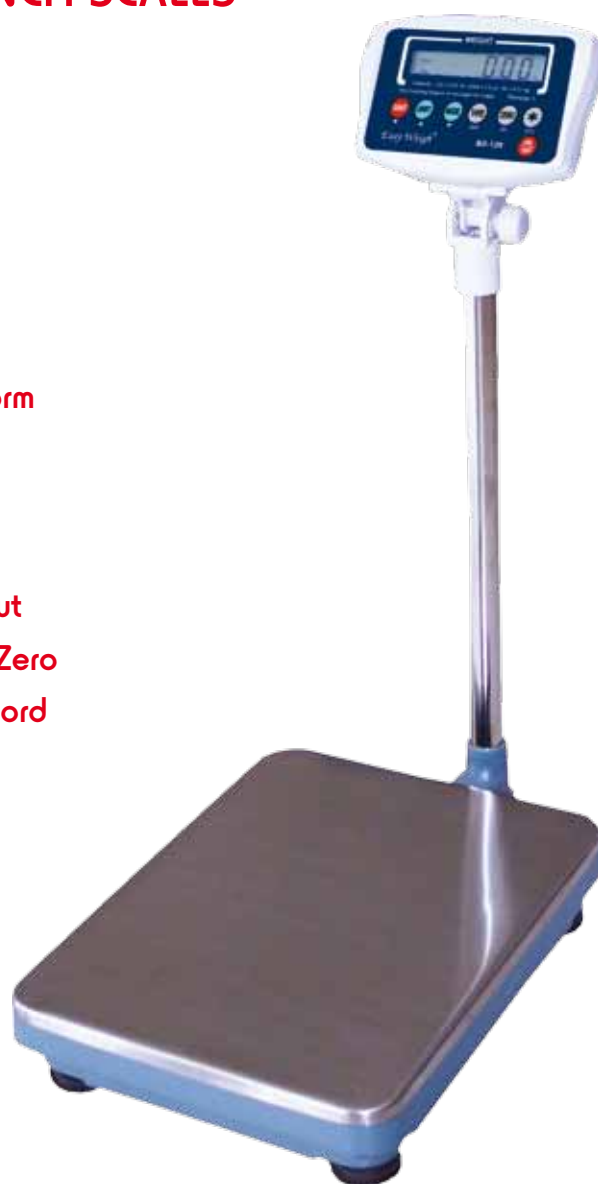

**ORDER TOLL FREE 800-445-6601**  
[www.skyfood.us](http://www.skyfood.us)

## BX-Series SIMPLE BENCH SCALES

- Large Platform Size: 16.2 " x 20.5 " (420 mm x 520 mm)
- High Resolution: 1/6000 NTEP Approved class III
- High Capacities: 120 lb, 300 lb or 600 lb (60 kg, 120 kg, or 300 kg)
- Large LCD display with 6 digit weighing
- Standard AC Cord; no clumsy adapter!
- 7 Units: Pounds, oz, kg, grams, Pieces, Percent, & Pound/Ounces
- Built-in rechargeable battery: Over 100 hours of continuous use!
- Comparator feature for Hi-lo Check Weighing
- Customizable Hold feature for high-motion weighing
- Built-in RS-232 Port for ECR, PC, or Printer Interface



	<b>BX-120+</b>	<b>BX-300+</b>	<b>BX-600+</b>
Shipping Weight .....	39 lb	38 lb	38 lb
Capacities and Graduations .....	120 x 0.02 lb	300 x 0.05 lb	600 x 0.1 lb
	2000 x 0.5 oz	4800 x 1 oz	9600 x 2 oz
	60 x 0.01 kg	120 x 0.02 kg	300 x 0.05 kg
Maximum Tare .....	Can tare up to Maximum Capacity		
NTEP certificate number .....	Approved 1/6000 and 1/3000 resolution, Legal For Trade, CC#06-035		
A/D Conversion Rate .....	50 Updates / Second		
Connectivity .....	RS-232 Port for connection to ECR, PC, or serial Printer		
Liquid Crystal Displays (LCD) .....	Weight: 6 Digits, 999.999 Max		
Platter Size Width .....	420 mm / 16.5 "		
Platter Size Length .....	520 mm / 20.5 "		
Accreditation .....	NTEP Class III, OIML, CE, ISO 9002, UL		
Product Dimensions .....	Width: 420 mm / 16.5 " - Length: 520 mm / 20.5 " - Height: 940 mm / 37.0 "		
Internal Power Supply, (AC Cord) .....	120 Volts AC @ 60 Hz, AC Power Cord		
External Adapter .....	120 Volts AC @ 60 Hz to 9VDC @ 800mA		
Battery Specifications .....	100 hrs with Backlight Off or 48 hrs with Backlight On (Continuous use)		
Power Consumption & Fuse Rating .....	Approximately 10 Watts / Fuse: 250 Volts, 1.5 Amp, 20mm		

**Office:**  
12550 Biscayne Blvd. Suite 800-3  
North Miami, FL 33181 - USA  
Phone: 305 868 1603  
Fax: 305 866 2704

**ORDER TOLL FREE 800-445-6601**  
[www.skyfood.us](http://www.skyfood.us)

Contact your local Skyfood Representative for additional information.  
Visit our web site at [www.skyfood.us](http://www.skyfood.us) for location and contact information.

**Warehouse:**  
71 Bloomfield Ave  
Newark, NJ 07104 - USA  
Phone: 973 482 5070  
Fax: 973 482 0725