

# 6245



MODEL 6245

## SOFT SERVE FREEZER

Twin twist flavor, Countertop, Gravity feed, Microprocessor control, Independent refrigeration and control system for each flavor

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 12 Liters (12.68 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps control product safety

### Output

55 Quarts/Hour

### Safety Protections



- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Flexible blade beater (optional)  
Higher capacity, higher overrun



3-24-2014

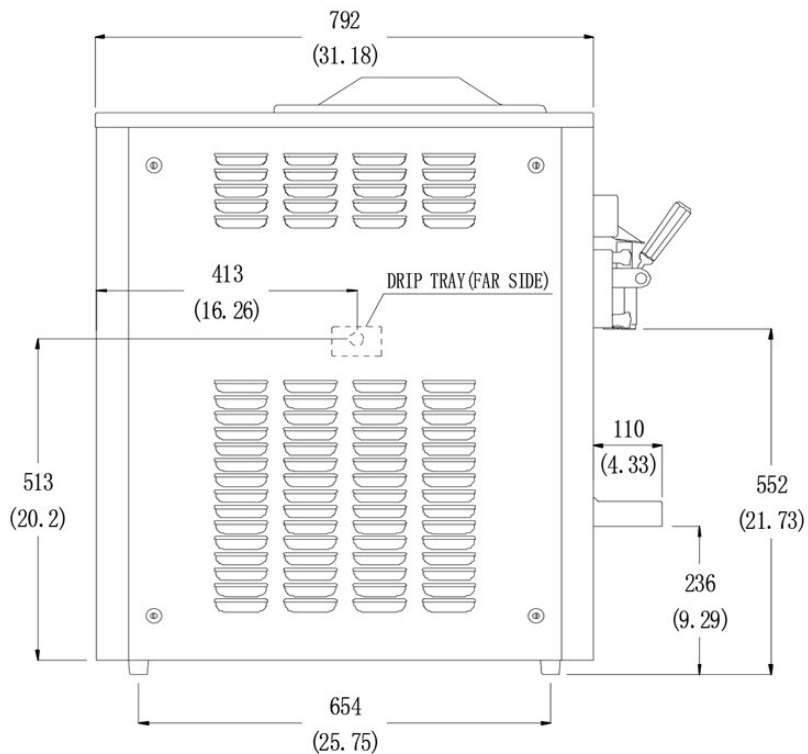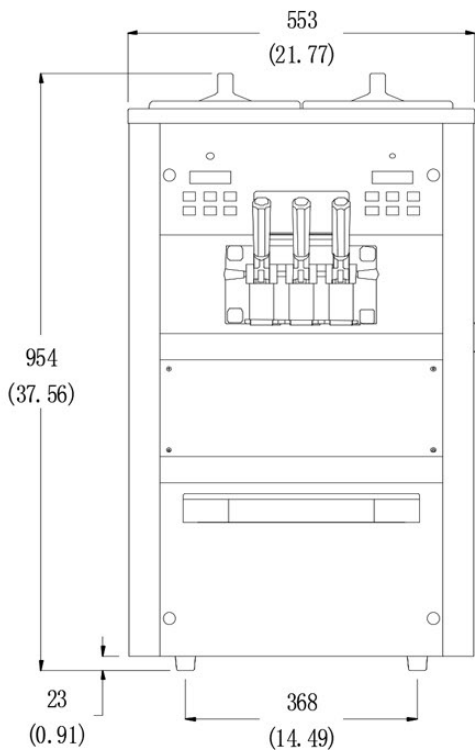

Weight	Kg/lb
Net	195 / 430
Shipping	212 / 467

**Packaging Volume** 0.67 CBM / 23.63 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	625 / 24.6
Depth	792 / 31.2	935 / 36.8
Height	954 / 37.6	1145 / 45.1

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	30	26	/ 3W
208-230/60/3	30	18	/ 4W

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.*

*(For exact electrical information, always refer to the data label of the unit.)*

**Note**

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

**Specifications**

**Electrical**

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**

Two, 1.25HP

**Refrigeration System**

Main Compressor: Two, 4400 BTU/HR, R404A

**Separate Hopper Cooling Compressor**

One, 480 BTU/HR, R134A  
(BTUs may vary depending on compressor used.)

**Air Cooled**

Minimum clearance of 152mm (6") on unit left, right, and back of sides is required to achieve optimum performance. Max room temperature 95° F

**Options**

- Air Exhaust Kit
- Water Cooled, Air Pump, Hopper Agitator, Flexible Blade Beater
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
- Cone dispenser