

# ARG15PVLOCKER



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright glass door commercial all-refrigerator with lockers for the display and refrigeration of vaccines

## Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature


Additional sensor reads interior air temperature for superior temperature control

## Product Features:

|                                                 |                                                                                                                                                                                      |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Purpose-built design                            | Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines                                                                  |
| +/-1°C Variation                                | The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period |
| Commercial design                               | Meets UL-471 commercial standards                                                                                                                                                    |
| Adjustable temperature                          | Intuitive controls let you adjust the interior temperature between +2 to +8°C                                                                                                        |
| Temperature alarm                               | Visual and audible alarms alert if the interior temperature rises or falls out of set range                                                                                          |
| Remote alarm contacts                           | Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)                     |
| Automatic defrost with adjustable cycle defrost | Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup                                                                                         |
| Access port                                     | Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment                                                 |
| Open door alarm                                 | Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)                                                                                          |

| Refrigerator Features |          |
|-----------------------|----------|
| Door Swing            | RHD      |
| Reversible            | Yes      |
| Shelf Type            | Lockers  |
| Thermostat Type       | Digital  |
| Fan Type              | Interior |
| Refrigerant Type      | R600a    |
| Refrigerant Amount    | 2.65oz.  |
| Interior Light        | Yes      |
| Temperature Range     | 2 to 8°C |

[illegible]

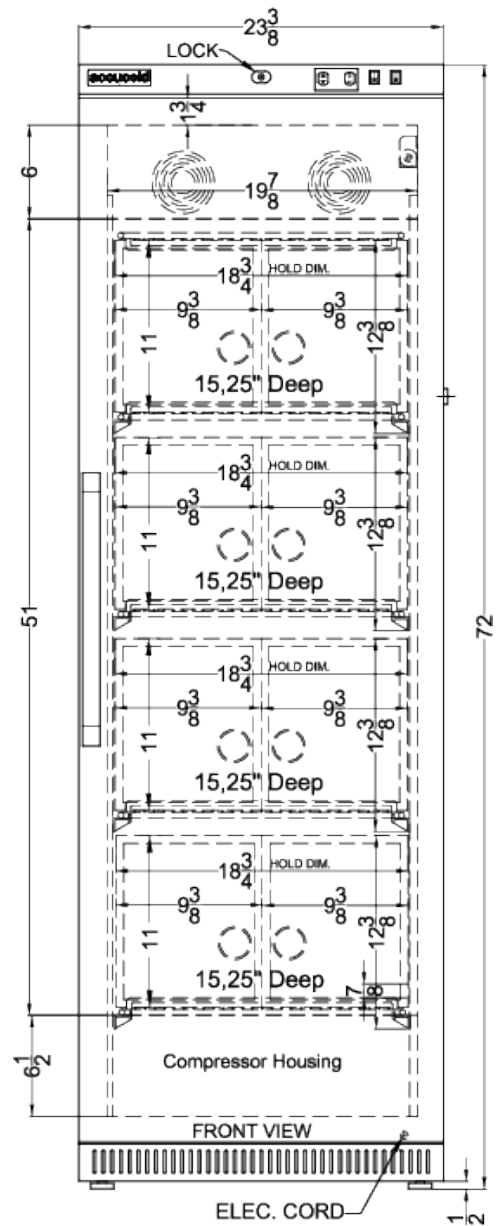

ARS15PVLOCKER