

# Tilting Skillet

Electric, Manual Tilting  
Floor Mounted  
Made in USA



## Standard Features



Model TT-TTMTSK-E40  
(with optional 1.5" draw-off valve & adjustable flanged feet)

- ◆ 304 stainless seam welded pan body with:
  - ◇ Center trunnion mounted
  - ◇ Self-locking worm gear tilt mechanism
  - ◇ Rotation exceeds 90°
  - ◇ 304 stainless cooking surface
  - ◇ 240V, three phase (3Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ Patented 304 stainless safety lid, seam welded with:
  - ◇ Actuator-assisted counterbalance
  - ◇ Full width condensate drip shield
  - ◇ Full width rear steam vent
  - ◇ 304 stainless safety handle
  - ◇ Single side-mounted safety handles
- ◆ 304 stainless, reinforced, water-resistant control console
- ◆ 304 stainless, tubular frame construction
- ◆ Adjustable bullet feet
- ◆ Knockdown capability to fit through 26" x 66" opening

## Models and Capacities

Model	2.5" Insert Pans	Cooking Baskets	Griddle Area (in. <sup>2</sup> )	Kettle (Gals.)	Oven Volume (ft. <sup>3</sup> )
TT-TTMTSK-E30	2	2	778	30	4.1
TT-TTMTSK-E40	3	3	1029	40	5.4

## Optional Features and Accessories

See price list for supplemental information regarding options

### Faucet Options:

- \_Single ball valve mounted to frame with 48" vinyl flexible spray hose assembly
- \_48" flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet
- \_Automatic water filling meter

(Call for information regarding additional faucet options)

### Prison/Security Options:

- \_Fasteners (screws & nuts)
- \_Nut / screw driver tool
- \_Draw-off nut driver tool
- \_Lockable control cover
- \_Lockable lid
- \_Draw-off protection

### Feet:

- \_Restraining device kit
- \_Casters (two each locking/non-locking type) & restraining devices
- \_Adjustable flanged feet

### Accessories:

- \_Perforated cooking/steaming basket (11" x 20½" x 5")
- \_Perforated or solid 12 x 20 food pans, 2½, 4 or 6 inch deep
- \_Draw-off drain spout
- \_Draw-off strainer
- \_Draw-off drain hose
- \_#10 Can holder for draw-off
- \_Flat bottom scoop
- \_Fry scoop
- \_Care kit
- \_3 part tool for cleaning cooking surface
- \_Pour lip pan holder assembly
- \_Pour lip strainer

### Other Options:

- \_Electric timer with buzzer
- \_In wall carrier for wall mounting

Select draw-off valve:  1.5"  2"  3"


With:  compression  ball type fitting

See price list for other draw-off options.

Select Voltage:  208V  240V  380V  415V  440V  480V

Select Phase:  1φ  3φ

Revision 113

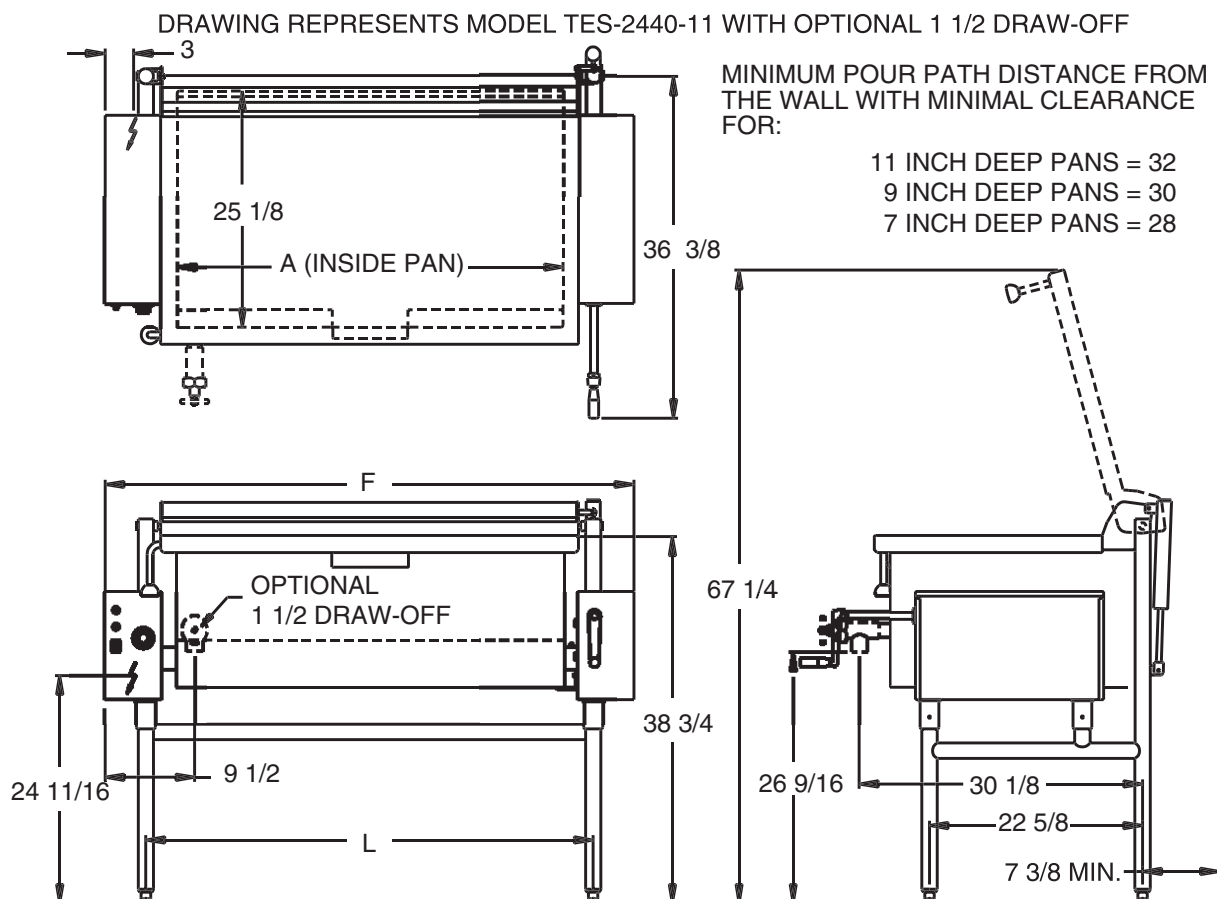

**CLASSIC TILTING SKILLET MODEL TES DIMENSIONS**

L	MODEL*	DEPTH	A	F	L
31.5	TT-TTMTSK-E30	9	31.0	46.1	37.5
31.5	TT-TTMTSK-E40	11	41.0	56.1	47.5

\*Dimensions on these drawings are applicable only when using a 1.5" diameter draw-off valve. If a 2" or 3" diameter draw-off valve is required, contact Legion for applicable dimensions.

**CLASSIC TILTING SKILLET MODEL TES ELECTRICAL SPECIFICATIONS (Amperes per Leg)**

MODEL*	kW	208 Volt		240 Volt		380 Volt	415 Volt	440 Volt	480 Volt
		1 Phase	3 Phase-Δ	1 Phase	3 Phase-Δ	3 Phase-Y	3 Phase-Y	3 Phase-Y	3 Phase-Y
TT-TTMTSK-E30	11.8	51.3	29.6	49.3	28.4	18.0	16.4	15.5	14.2
TT-TTMTSK-E40	17.7	76.9	44.4	73.9	42.7	27.0	24.6	23.3	21.3

Revision 719