



|              |     |          |       |       |
|--------------|-----|----------|-------|-------|
| PROJECT NAME |     | LOCATION |       | AIA # |
| ITEM #       | QTY | MODEL #  | SIS # |       |

# SPEC SERIES®

PASS-THRU GLASS FRONT/SOLID REAR SWING DOORS HEATED CABINETS

| models | STR2HPT-2G-2S | STA2HPT-2G-2S | STG2HPT-2G-2S |
|--------|---------------|---------------|---------------|
|--------|---------------|---------------|---------------|



| STR2HPT-2G-2S   |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Stainless steel side walls, back, floor, door liner, & ceiling. |
| <b>Shelving</b> | (1) Interior kit option included per full section.              |

| STA2HPT-2G-2S   |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, chrome plated, wire shelves per section.        |


| STG2HPT-2G-2S   |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, with matching aluminum sides.             |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, chrome plated, wire shelves per section.        |

## SPECIFICATIONS

| Dimensions        | in.                            | mm.                  |
|-------------------|--------------------------------|----------------------|
| Length            | 52 <sup>5</sup> / <sub>8</sub> | 1337                 |
| Depth             | 36 <sup>1</sup> / <sub>8</sub> | 918                  |
| Height            | 77 <sup>3</sup> / <sub>4</sub> | 1975                 |
| <b>Electrical</b> | <b>U.S.</b>                    | <b>International</b> |
| Watts             | 3000                           |                      |
| Voltage           | 208-240/60/1                   |                      |
| NEMA              | N/A                            |                      |
| Cord Length       | N/A                            | N/A                  |

\* Height does not include 6<sup>1</sup>/<sub>8</sub>" (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include 1/4" (7mm) for system mechanical components.  
 † Depth does not include 1 1/2" for front & back door handles.  
 Note: Requires hard wiring 208-240/60 Hz, single phase, 2 pole, 3 wire circuit.

## plan view

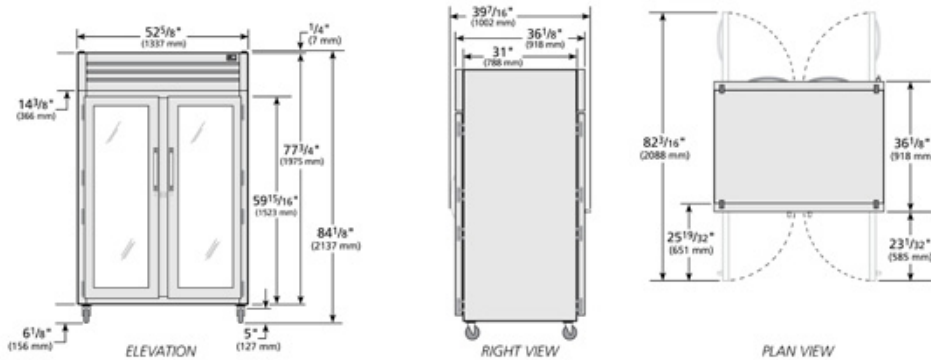

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

|  |           |                   |
|--|-----------|-------------------|
|  | APPROVALS | AVAILABLE AT      |
|  |           | Printed in U.S.A. |



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

PASS-THRU GLASS FRONT/SOLID REAR SWING DOORS HEATED CABINETS

|        |               |               |               |
|--------|---------------|---------------|---------------|
| models | STR2HPT-2G-2S | STA2HPT-2G-2S | STG2HPT-2G-2S |
|--------|---------------|---------------|---------------|



## standard features

### HEATER SYSTEM

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- One (1) stainless steel (for corrosion resistance), heating element for uniform generation of electric heat. Cabinet comes with a total of 3000 watts.
- Manually controlled vent located on top of the cabinet for positive humidity control.

### CABINET CONSTRUCTION

- Insulation - entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOORS

- "Low-E", double pane thermal insulated glass.
- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handles.

- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.
- NSF-4 compliant for open food product.

### ELECTRICAL

- True requires that a sole use circuit be dedicated for the unit.
- Unit comes with 3 feed wires (including ground) to be hardwired at installation site to a 208-240/60 Hz. single phase, 20 amp dedicated circuit.

### OPTIONAL FEATURES/ ACCESSORIES

- (upcharge & lead times may apply)*
- 6" (153 mm) standard legs.
  - 6" (153 mm) seismic/flanged legs.
  - 6" (153 mm) stainless steel legs.
  - Additional shelves.
  - Security package.

### SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.
- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (field installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 26 5/16"L x 21 1/16"D (669 mm x 548 mm). Optional wall mounted shelf support pilasters (field installed) with four (4) shelf clips per shelf available; adjustable on 1/2" (13 mm) increments (must order at time of cabinet order).
- Additional kit option components available individually.

#### WARRANTY\*

Three year warranty on all parts and labor. (U.S.A. only)

\*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model           | Elevation | Right | Plan | 3D | Back |
|-----------------|-----------|-------|------|----|------|
| ST( )2HPT-2G-2S |           |       |      |    |      |