

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

Glass Door Heated Cabinet

Reach-In PRO Series

Model: PRO-15H-G

___ FEATURES & BENEFITS =__

Digital temperature control & monitor system

- · Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- · Sensitive touch display.

Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length glass doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles
















(unit: inch)

Glass Door Heated Cabinet

Model: PRO-15H-G

ELECTRICAL DATA		
Voltage	115/60/1	
Plug Type	NEMA 5-15P	
Full Load Amperes	8.5	
Wattage (W)	950	
Feed Wires with Ground	3	
Cord Length (ft.)	8	
DIMENSIONAL DATA		
# of Doors	1	
# of Racks Accepted	-	
Net Capacity (cu. ft.)	14.65	
Ext. Length Overall (in.)	173/4 (451mm)	
Ext. Depth Overall (in.)*	343/8 (872mm)	
Ext. Height Overall (in.)†	78 (1980mm)	
Int. Length Overall (in.)	133/4 (350mm)	
Int. Depth Overall (in.)	253/8 (643mm)	
Int. Height Overall (in.)	58 _{3/4} (1493mm)	
# of Shelves	3	
Shelf Size (L x D) (in.)	121/2 x 251/8	
Net Weight (lbs.)	235	
Gross Weight (lbs.)	265	

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

- * Depth does not include 1-3/8" for door handles.
- † Height does not include 5" for caster height.

■ WARRANTY: 3 Year Parts and Labor Warranty


STANDARD FEATURES


- · Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design
- ** Lead time applies. Please contact your sales representative for more details to order.

■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H15R915080

PLAN VIEW

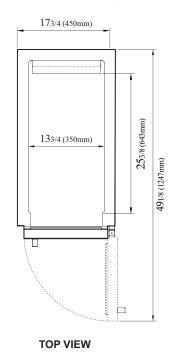

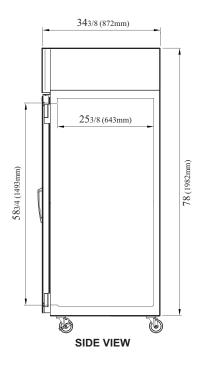

Ver.20210730









YEAR ENI

ENERGY STAR® Qualified ■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002





